


Current Transducer HX 05 .. 15-NP

For the electronic measurement of currents: DC, AC, pulsed, mixed, with a galvanic isolation between the primary circuit (high power) and the secondary circuit (electronic circuit).



$$I_{PN} = 5 \dots 15 \text{ A}$$



Electrical data

Primary nominal current rms I_{PN} (A)		Primary current, measuring range I_{PM} (A)		Primary conductor diameter x turns (mm)	Type	RoHS since date code
Serial	Parallel	Series	Parallel			
± 5	± 10	± 15	± 30	0.8d x (6T+6T)	HX 05-NP	planned
± 10	± 20	± 30	± 60	1.0d x (3T+3T)	HX 10-NP	planned
± 15	± 30	± 45	± 90	1.2d x (2T+2T)	HX 15-NP	46047
V_{OUT}	Output voltage (Analog) @ $\pm I_{PN}$, $R_L = 10 \text{ k}\Omega$, $T_A = 25^\circ\text{C}$					± 4 V
R_{OUT}	Output internal resistance					< 50 Ω
R_L	Load resistance					≥ 10 k Ω
V_C	Supply voltage (± 5 %)¹)					± 15 V
I_C	Current consumption					< ± 15 mA
V_d	Rms voltage for AC isolation test, 50 Hz, 1 min					
	Primary to secondary					> 3 kV
	Primary 1 to primary 2					> 1 kV
V_e	Partial discharge extinction voltage rms @ 10 pC					≥ 1 kV
$\hat{V}_W$	Impulse withstand voltage, 1.2/50 μs					≥ 6 kV

Accuracy-Dynamic performance data

x	Accuracy @ I_{PN} , $T_A = 25^\circ\text{C}$ (excluding offset)	< ± 1	% of I_{PN}
e_L	Linearity error (0 .. ± I_{PN})	< ± 1	% of I_{PN}
V_{OE}	Electrical offset voltage @ $T_A = 25^\circ\text{C}$	< ± 40	mV
V_{OH}	Hysteresis offset voltage @ $I_p = 0$; after an excursion of $1 \times I_{PN}$	< ± 15	mV
TCV_{OE}	Temperature coefficient of V_{OE}	< ± 1.5	mV/K
TCV_{OUT}	Temperature coefficient of V_{OE} (% of reading)	± 0.1	%/K
t_r	Response time to 90% of I_{PN} step	≤ 3	μs
BW	Frequency bandwidth (- 3 dB) ²)	50	kHz

General data

T_A	Ambient operating temperature	- 25 .. + 85	°C
T_S	Ambient storage temperature	- 25 .. + 85	°C
m	Mass	8	g
dCp	Creepage distance	≥ 5.5	mm
	Isolation material group	I	
	Standards	EN50178: 1997	

Notes :¹) Also operate at ±12V power supplies, measuring range reduced to ±2.5x I_{PN}

²) Small signal only to avoid excessive heating of the magnetic core

Features

- Galvanic isolation between primary and secondary circuit
- Hall effect measuring principle
- Isolation voltage 3000V
- 2 isolated primary windings
- Low power consumption
- Extended measuring range (3 x I_{PN})
- Power supply from ±12V to ±15V
- Isolated plastic case recognized according to UL94-V0.

Advantages

- Low insertion losses
- Easy to mount with automatic handling system
- Only one design for wide current ratings range
- Small size and space saving
- High immunity to external interference.


Applications

- Switched Mode Power Supplies (SMPS)
- AC variable speed drives
- Uninterruptible Power Supplies (UPS)
- Electrical appliances
- Battery supplied applications
- DC motor drives

Application domain

- Industrial

Dimensions HX 05..15-NP (in mm. 1 mm = 0.0394 inch)

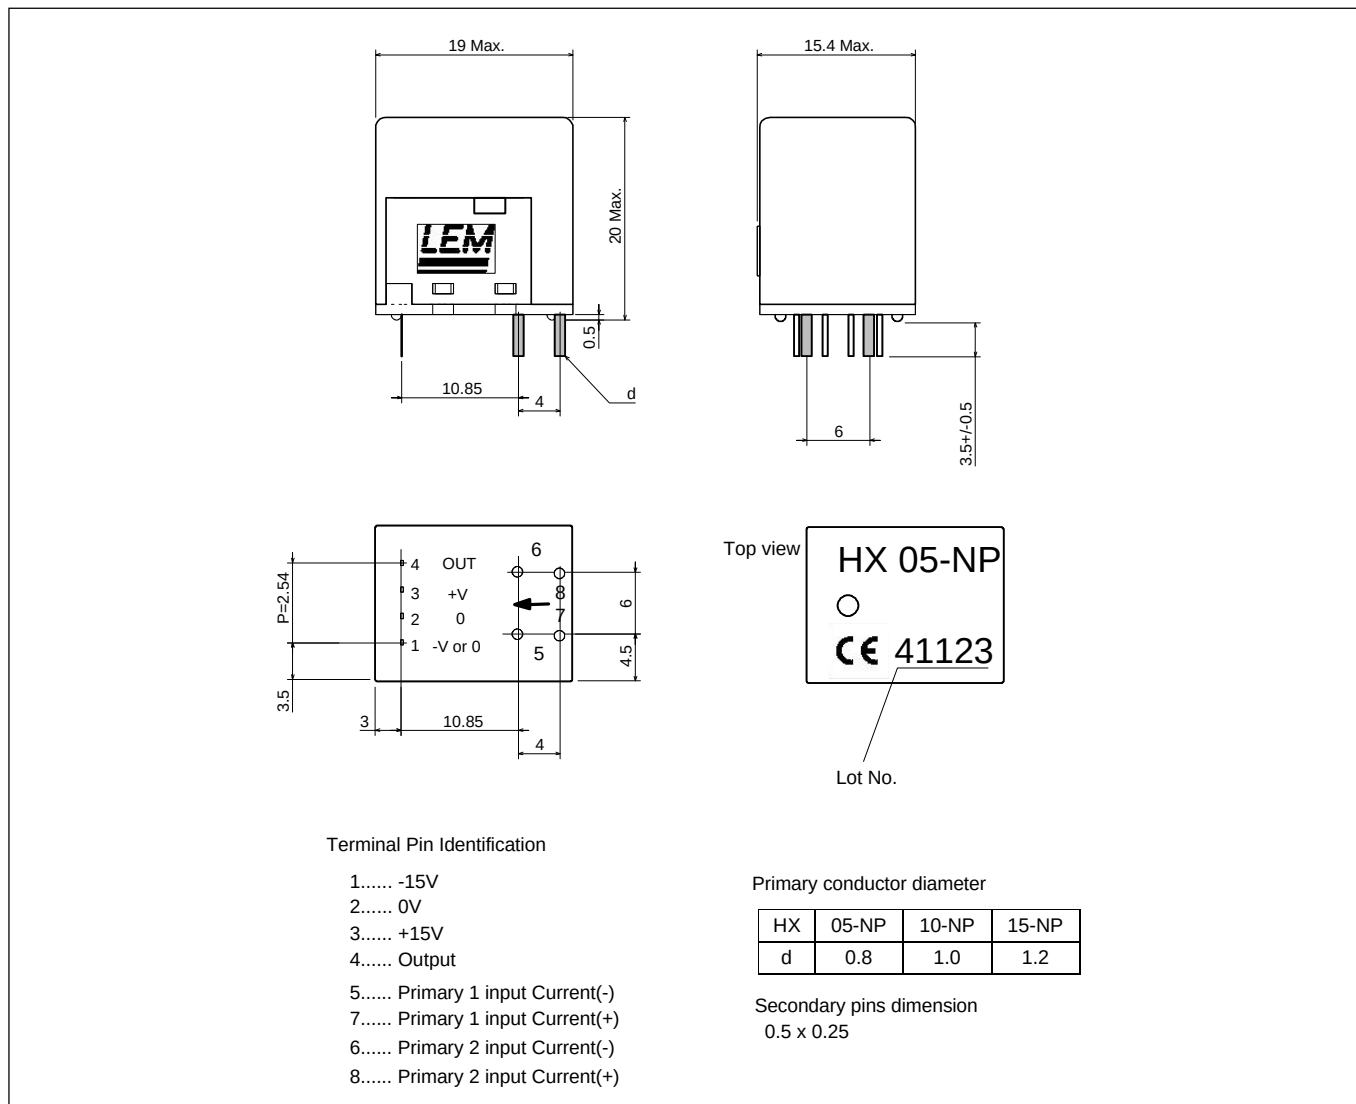

Mechanical characteristics

- General tolerance ± 0.5 mm

Safety



This transducer must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the following manufacturer's operating instructions.



Caution! Risk of electrical shock

When operating the transducer, certain parts of the module can carry hazardous voltage (eg. primary busbar, power supply). Ignoring this warning can lead to injury and/or cause serious damage.

This transducer is a built-in device, whose conducting parts must be inaccessible after installation.

A protective housing or additional shield could be used.

Main supply must be able to be disconnected.