

Diode Schottky



RoHS
Compliant



Features:

- Plastic material
- Metal silicon rectifier, majority carrier conduction
- Low power loss, high efficiency
- High current capability, low forward voltage drop
- High surge capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- Guardring for over voltage protection
- High temperature soldering guaranteed: 260°C/10 seconds, 0.25" (6.35mm) from case

Specifications:

Mechanical Data:

Cases	: JEDEC TO-220AC moulded plastic body
Terminals	: Pure tin plated, lead free, solderable per MIL-STD-750, Method 2026
Polarity	: As marked
Mounting Position	: Any
Mounting Torque	: 5 in. - lbs. Max.
Weight	: 0.08 oz, 2.24g

Maximum Ratings and Electrical Characteristics:

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

Parameter	Symbol	MBR 735	MBR 745	MBR 750	MBR 760	MBR 790	MBR 7100	MBR 7150	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	35	45	50	60	90	100	150	V
Maximum RMS Voltage	V_{RMS}	24	31	35	42	63	70	105	
Maximum DC Blocking Voltage	V_{DC}	35	45	50	60	90	100	150	
Maximum Average Forward Rectified Current	$I_{(AV)}$	7.5							A
Peak Repetitive Forward Current (Square Wave, 20kHz) at $T_C = 105^\circ\text{C}$	I_{FRM}	15							
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	150							



Parameter	Symbol	MBR 735	MBR 745	MBR 750	MBR 760	MBR 790	MBR 7100	MBR 7150	Units
Peak Repetitive Reverse Surge Current (Note 1)	I_{RRM}	1		0.5					A
Maximum Instantaneous Forward Voltage at (Note 2) $I_F = 7.5A, T_C = 25^\circ C$ $I_F = 7.5A, T_C = 125^\circ C$ $I_F = 15A, T_C = 25^\circ C$ $I_F = 15A, T_C = 125^\circ C$	V_F	- 0.57 0.84 0.72		0.75 0.65 -		0.92 0.82 -		0.95 0.92 -	V
Maximum Instantaneous Reverse Current at $T_C = 25^\circ C$ at Rated DC Blocking Voltage (Note 2) at $T_C = 125^\circ C$	I_R	0.1 15		0.1 10		0.1 5			μA μA
Voltage Rate of Change (Rated V_R)	dV/dt	10,000							V/ μS
Typical Junction Capacitance	C_j	360		280		200		160	pF
Maximum Typical Thermal Resistance, (Note 3)	$R_{\theta JC}$ $R_{\theta JA}$				5 15				$^\circ C/W$
Operating Junction Temperature Range	T_J	-65 to +150							$^\circ C$
Storage Temperature Range	T_{STG}	-65 to +175							


Note: 1. 2 μs Pulse Width, $f = 1kHz$.

Note: 2. Pulse Test: 300 μs Pulse Width, 1% Duty Cycle.


Note: 3. Mount on Heatsink Size of 2 x 3 x 0.25" Al-Plated.

Ratings and Characteristic Curves (MBR735 thru MBR7150)


Maximum Forward Current Derating Curve

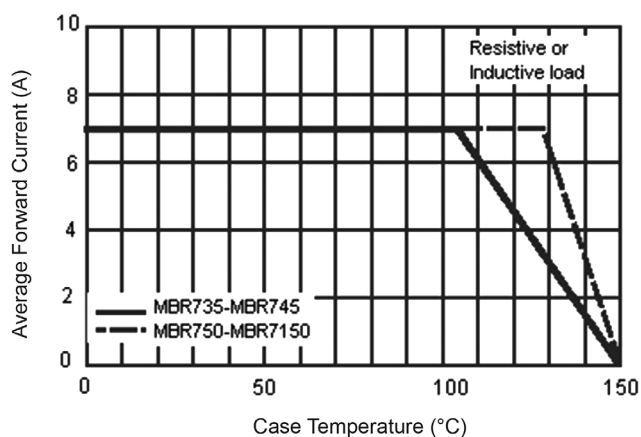


Maximum Non-Repetitive Peak Forward Surge Current

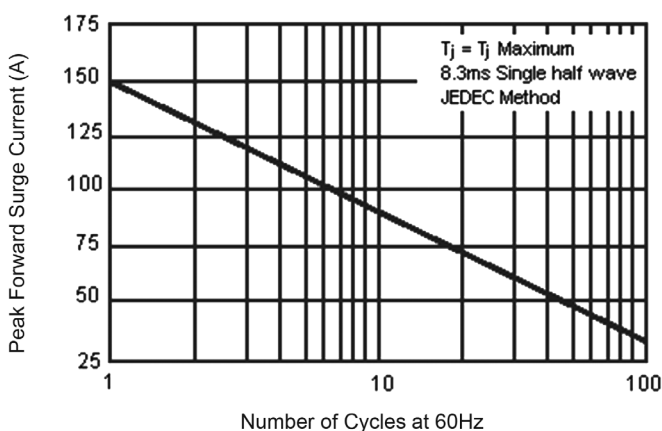


Typical Instantaneous Forward Characteristics

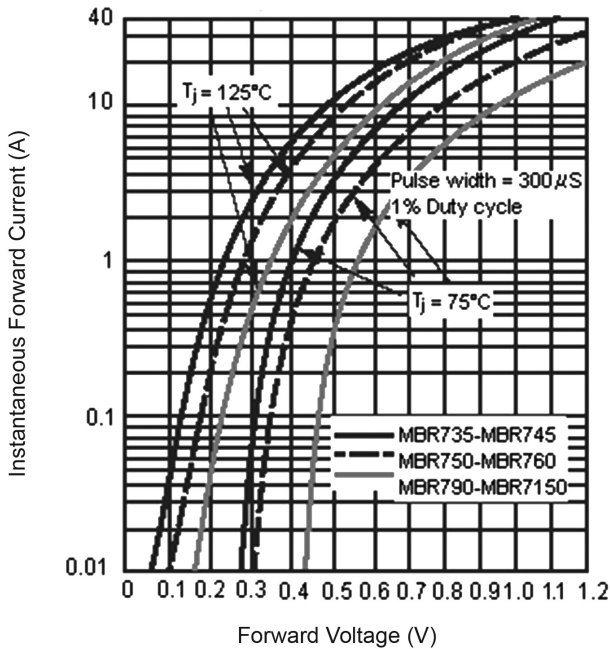


Typical Reverse Characteristics

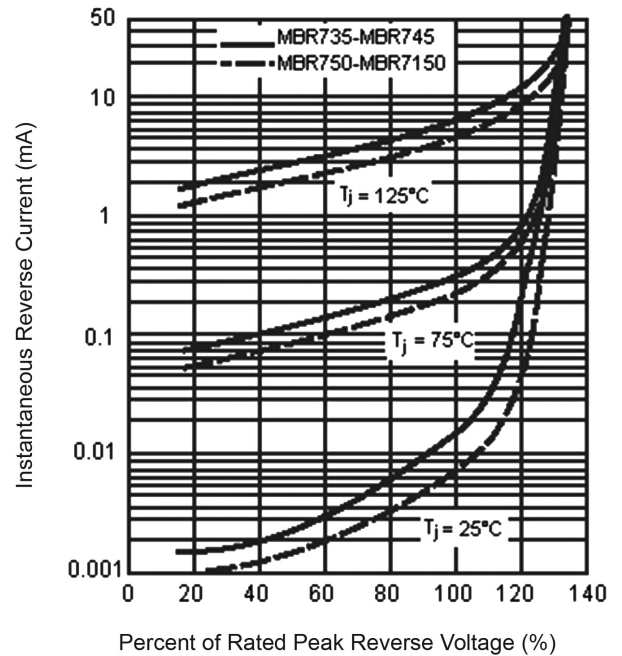

Typical Junction Capacitance

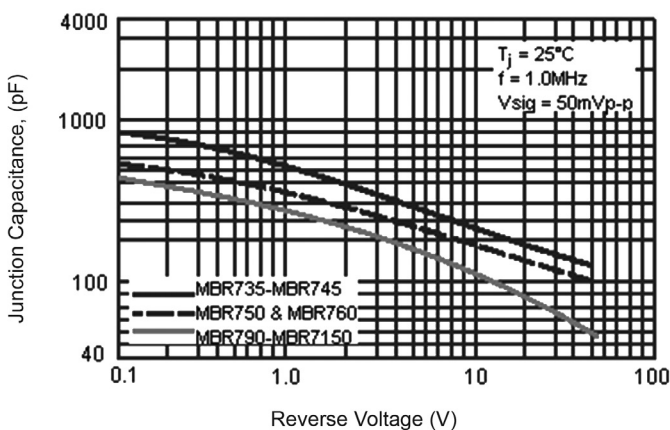


Typical Transient Thermal Characteristics

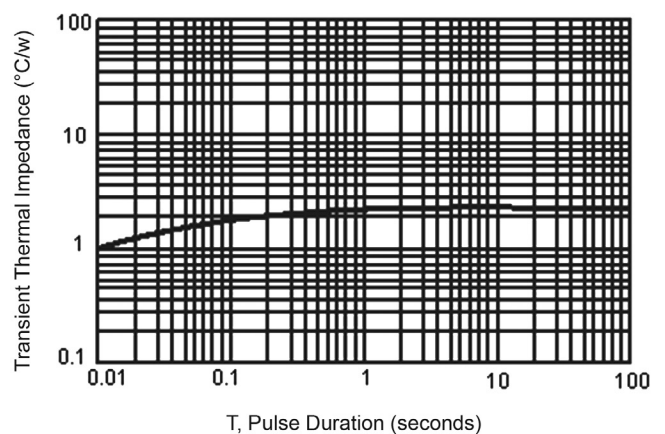

Diode Schottky



TO-220AC

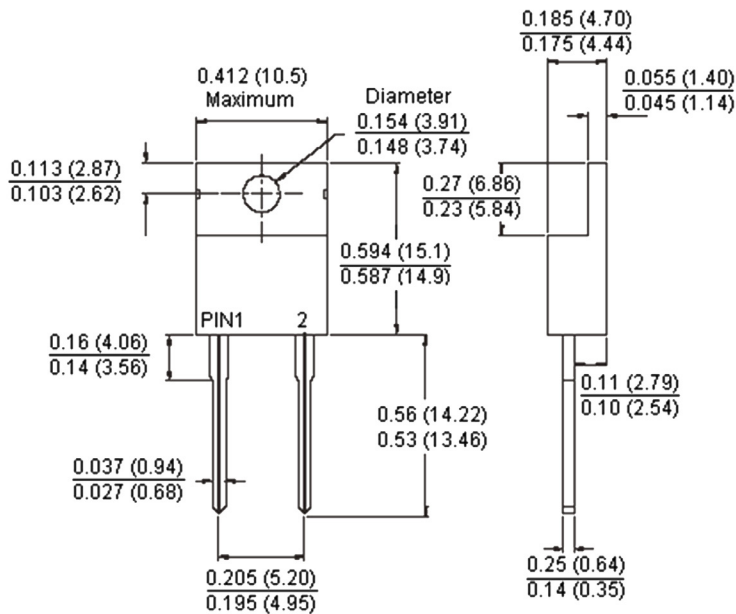

Dimensions : Inches (Millimetres)

Part Number Table

Description	Part Number
Diode, Schottky, 7A, 100V	MBR7100
Diode, Schottky, 7A, 150V	MBR7150
Diode, Schottky, 7A, 35V	MBR735
Diode, Schottky, 7A, 45V	MBR745
Diode, Schottky, 7A, 50V	MBR750
Diode, Schottky, 7A, 60V	MBR760
Diode, Schottky, 7A, 90V	MBR790

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com
www.farnell.com
www.newark.com

