

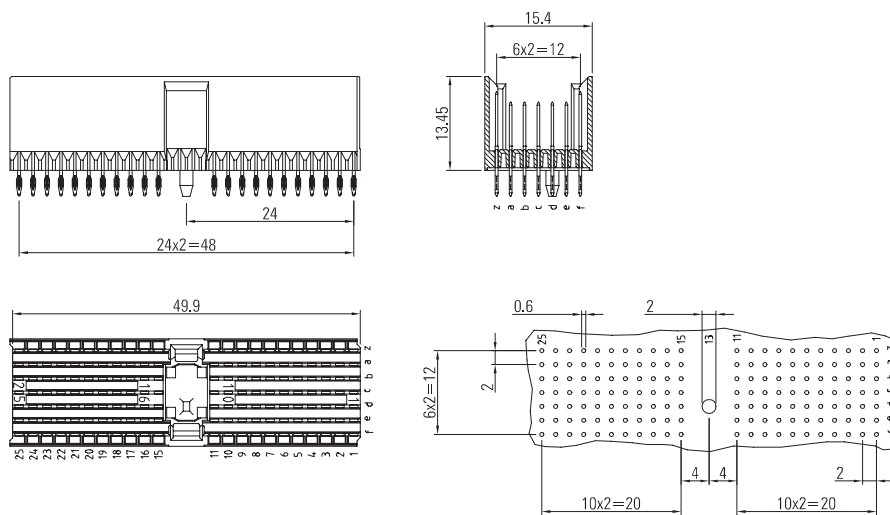
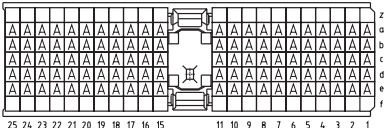
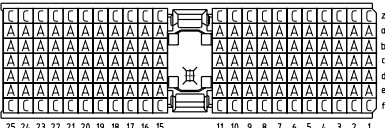
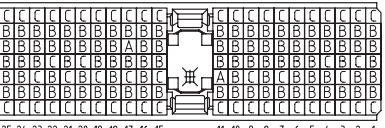


Dimensions in mm

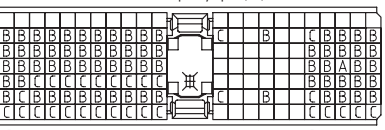

Hole pattern

No. of contacts	Contact arrangement	Press-fit technology – Performance level II	
		PCB thckn. 1.6 – 2.8	PCB thickness > 2.8
		Part number	
110		243-11010-05	243-11010-15
154		243-11310-05	243-11310-15
154	cPCI Hot-Swap (P1) 	243-11322-05	243-11322-15
100	cPCI Telephony Spec (P4) 	243-11323-05	243-11323-15
154		243-11360-05	243-11360-15

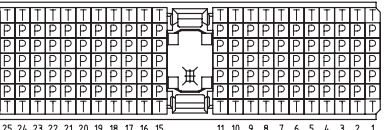

On request

- Performance level I or customer-specific
- Contact arrangement (see page 75)

Accessories

- Press-fit tool (see page 198)
- Support tool (see page 199)
- Coding keys (see page 68)
- Shroud (see page 66)

Cross reference

- Pin lengths (see page 34)

Note

- CompactPCI P1/P4