


| No. of contacts | Contact arrangement | Press-fit technology – Performance level II | |
|-----------------|------------------------------|---|---------------------|
| | | PCB thckn. 1.6 – 2.8 | PCB thickness > 2.8 |
| | | Part number | |
| 154 | | 243-22310-05 | 243-22310-15 |
| 154 | cPCI Telephony Spec (P5) | 243-22311-05 | 243-22311-15 |
| 154 | cPCI (P2/P5) | 243-22320-05 | 243-22320-15 |
| 154 | cPCI (P2/P5) | 243-22360-05 | 243-22360-15 |

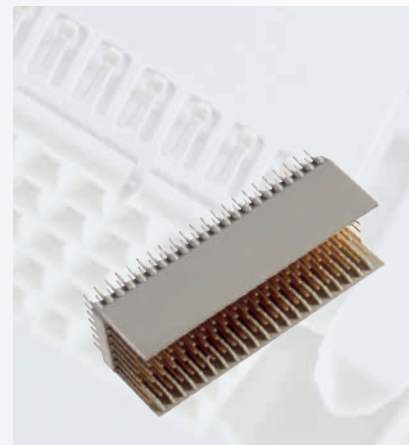

| | |
|--|--|
| <p>On request</p> <ul style="list-style-type: none"> – Performance level I or customer-specific – Contact arrangement (see page 75) | <p>Accessories</p> <ul style="list-style-type: none"> – Press-fit tool (see page 200) – Support tool (see page 201) – Shroud (see page 66) |
|--|--|

Cross reference

- Pin lengths (see page 34)

Note

- CompactPCI P2/P5