

5mm Pitch Low Profile 90° Rising Clamp Terminal

- 2 & 3 pole double interlocking mechanism for increased strength
- 4-12 pole solid block and end stackable
- Moulded in green UL94-V0 flame retardant PA
- Professional rising clamp terminals
- 1.5mm² cable entry
- CE, UL, RoHS, approved
- Guided pin alignment
- Captive screw




Type No.	Poles	Length
CTB0550/2	2	10mm
CTB0550/3	3	15mm
CTB0550/4	4	20mm
CTB0550/5	5	25mm
CTB0550/6	6	30mm
CTB0550/7	7	35mm
CTB0550/8	8	40mm
CTB0550/9	9	45mm
CTB0550/10	10	50mm
CTB0550/11	11	55mm
CTB0550/12	12	60mm

Specification

Rating	14A/250V, UL=14A, CUL=14A. IMQ=14A, VDE=14A
Dielectric strength	≥2.5kV
Impulse withstand voltage	4kV
Working temperature	110°C
Moulding	UL94-V0 flame retardant PA
Pin/terminal	Tinned, nickel plated brass
Wire clamp	Nickel plated brass
Screw/torque	M3 steel, zinc colour plated/0.5Nm
Recommended PCB hole size	Ø1.3mm

CTB0550



For other dimensions see CTB0500


5mm Pitch High Current Rising Clamp Terminal

- 2 & 3 pole double interlocking mechanism for increased strength
- 4-12 pole pre-assembled
- Moulded in green UL94-V0 flame retardant PA
- Professional rising clamp terminals
- 4mm² cable entry
- CE, UL, RoHS, approved
- Guided pin alignment
- Captive screw

CTB0700



Type No.	Poles	Length
CTB0700/2	2	10mm
CTB0700/3	3	15mm
CTB0700/4	4	20mm
CTB0700/5	5	25mm
CTB0700/6	6	30mm
CTB0700/7	7	35mm
CTB0700/8	8	40mm
CTB0700/9	9	45mm
CTB0700/10	10	50mm
CTB0700/11	11	55mm
CTB0700/12	12	60mm

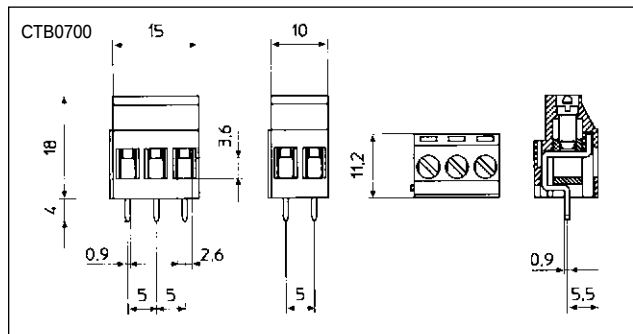

Specification

Rating	24A/320V, UL=16A, CUL=16A. IMQ=24A, VDE=24A
Dielectric strength	3kV
Impulse withstand voltage	4kV
Working temperature	110°C
Moulding	UL94-V0 flame retardant PA
Pin/terminal	Tinned, nickel plated brass
Wire clamp	Nickel plated brass
Screw/torque	M3 steel, zinc colour plated/0.5Nm
Recommended PCB hole size	Ø1.3mm