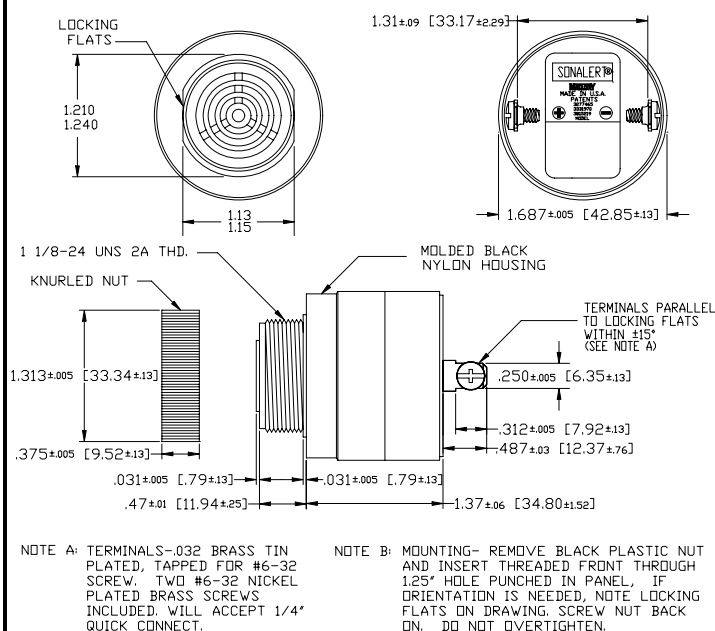


**Specifications:**

|                         |                                   |
|-------------------------|-----------------------------------|
| Sound level Category    | Loud Sound Level                  |
| Mode of Operation       | Fast Pulse                        |
| Mounting                | Panel (see note B)                |
| Voltage Rating          | 6 to 28 Vac/dc                    |
| Frequency               | 2900 Hz $\pm$ 500 Hz              |
| Loudness (Min. Voltage) | 80 dB(A) min. @ 2 FT and 6 Vac/dc |
| Loudness (Max Voltage)  | 95 dB(A) min. @ 2FT and 28 Vac/dc |
| Current Draw            | 4 mA Max @ 6 Vac/dc               |
| Current Draw            | 30 mA Max @ 28 Vac/dc             |
| Min Pulse Rate (PPS)    | 2 @ 6 Vac/dc                      |
| Max Pulse Rate (PPS)    | 10 @ 28 Vac/dc                    |
| Duty Cycle (%)          | 50 (Approx)                       |
| Storage Temperature     | -40°C to +85°C                    |
| Operating temperature   | -30°C to +65°C                    |
| Weight (Typical)        | 2.1 oz (59 g)                     |
| Housing                 | 6/6 Nylon, Color Black            |
| Options                 | For other options contact factory |

**Dimensions:** Inches (mm)

**UL Recognized**
**PART DIMENSIONS BEFORE CODE DATE 0809 5**

**PART DIMENSIONS AFTER CODE DATE 0810 1**
