


- Rated insulation voltage:  
AC 250V.
- Rated current: 16A
- Cable section: 2.5mm<sup>2</sup>
- Type of conductor:  
flexible only.
- Number of poles: 3

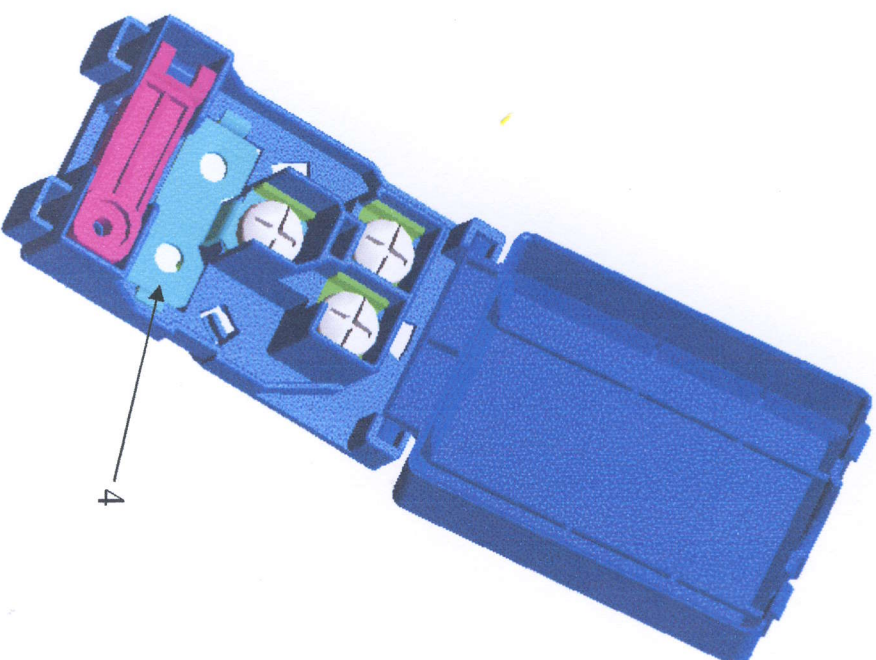

## General informations

|                                                |                             |             |
|------------------------------------------------|-----------------------------|-------------|
| ITW code:                                      | Date:                       | 16/01/2006  |
| Type/model <b>PA 244 S</b>                     | P.D. (project development): | <b>4498</b> |
| Description: <b>Terminal Block - NEW PA244</b> |                             |             |

## Technical data

|                                    |                 |                                    |
|------------------------------------|-----------------|------------------------------------|
| Rated insulation voltage:          | AC V            | <b>250</b>                         |
| Rated current:                     | A               | <b>10 - 25</b>                     |
| Wire size:                         | mm <sup>2</sup> | <b>3x0,75 - 3x2,5</b>              |
| Total poles:                       | n°              | <b>3</b>                           |
| Male tabs:                         | mm              | <b>6,3x0,8 (two for each pole)</b> |
| Working temperature:               | °C              | <b>110</b>                         |
| Type of wire / cable clamp capab.: |                 | <b>flexible / 11 mm</b>            |
| Glow wire test (GWFI)              | °C              | <b>850</b>                         |
| Traking test (PTI):                | V               | <b>&gt;250</b>                     |
| Protection degree:                 | IP              | <b>30</b>                          |
| Kind of connection:                |                 | <b>Only for fixed usage</b>        |

## Possible raw materials used

|                        |                   |                        |                       |
|------------------------|-------------------|------------------------|-----------------------|
| Producer:              | <b>BASF</b>       | <b>EURONIL</b>         | <b>RADICI</b>         |
| Tradename:             | <b>A3W</b>        | <b>Nilamid AXP 156</b> | <b>RDF A AE 131 C</b> |
| Flame class (UL 94):   | <b>V2</b>         | <b>V2</b>              | <b>V0</b>             |
| Glow wire test (GWFI): | <b>850</b>        | <b>850</b>             | <b>850</b>            |
| Glow wire test (GWIT): | <b>775 5 sec.</b> | <b>750 2 sec.</b>      | <b>750 2 sec.</b>     |
| CTI (sol. A):          | <b>&gt;600</b>    | <b>250-399</b>         | <b>250-399</b>        |

## Similar products with homologation:

|                      |                                                  |                 |
|----------------------|--------------------------------------------------|-----------------|
| Type:                | <b>PA 244</b>                                    | <b>PA 244 N</b> |
| Licenze n°:          | <b>121360 (VDE) - CA02.00715/EG912 (IMQ)</b>     |                 |
| What does it change? | <b>Plastic box, contact geometry and screws.</b> |                 |

## Image:

