



Datenblatt - Fiche technique - Data sheet

11.02.8871



ROLINE USB 3.0 Kabel, Typ A-B, 3,0m

ROLINE Câble USB 3.0 Type A-B, 3,0m

ROLINE USB 3.0 Cable, A - B, M/M, 3.0 m




ROHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE
Δ	B	ECR # 090616-6 ADD BAR CODE NO.	06/16/09'

USB 3.0 A/M 9PIN
INS:BLUE(PT 300C)



L±T

USB 3.0 B/M 9PIN
INS:BLACK

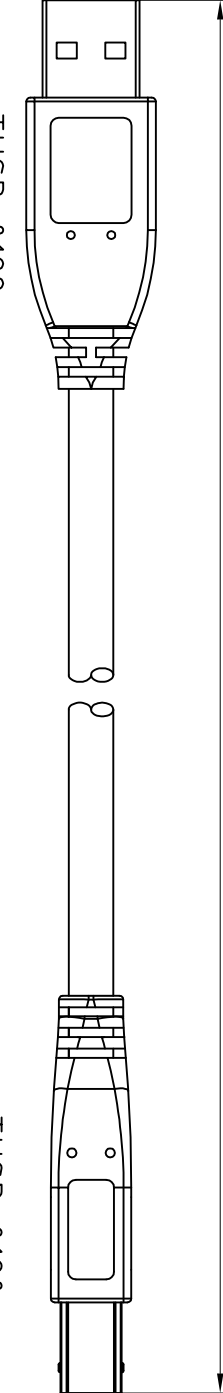

TUSB-0189

TUSB-0190

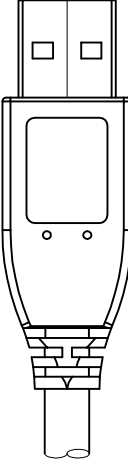

NOTE:

1.CABLE: UL-2725 [#28(7/0.127 T.C)×1P INS:Foam-PE+D.W(7/0.127 T.C)+AL/MY +Hot-melt-Mylar]×2C+ #28(7/0.127 T.C)×1P INS:Polyolefin + #28(7/0.127 T.C)×2C INS:Polyolefin + AL/MY + B.D(85%)
PVC JACKET, OD:5.2±0.15mm COLOR:BLACK(NK-K01) REV 3.0.


2.CONNECTOR:

P1: USB 3.0 A TYPE MALE 9PIN CONTACT:30u",SHELL:NI-PLATED.
P2: USB 3.0 B TYPE MALE 9PIN CONTACT:30u",SHELL:NI-PLATED.

3.HOOD:MOLDED TYPE,PVC 45P, COLOR:BLACK(NK-K01).

4.ELECTRICAL TEST:

- (1)100% OPEN SHORT & MIS WIRE TEST.
 - (2)CONTACT RESISTANCE 3 ohm Max .
 - (3)INSULATION RESISTANCE 10M ohm Min .
 - (4)HI-POT DC300V
- 5.PACKING: EACH PC / POLYBAG + HEADER CARD + BAR CODE LABEL.

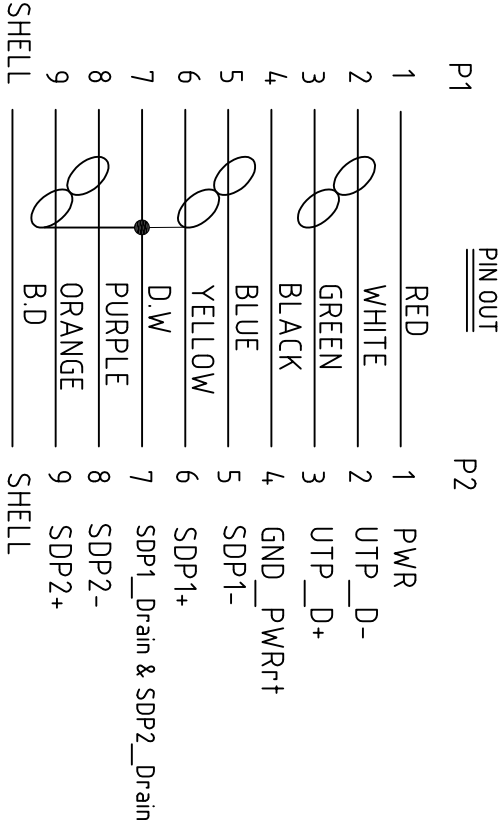

Tolerance Inch M/M										Title			
X	.015	.30	XX	.010	.10	XXX	.005	.05	Draw				
FANNIE 06/16/09'										Customer P/N			
Check										App'd		Customer: T-RAG	
Engr										Scale	NONE	Units	M/M
										Dwg No.	170-3591	REV:B	Sheet:1/1

