

Vishay Semiconductors

Small Signal Schottky Diode



LINKS TO ADDITIONAL RESOURCES











MECHANICAL DATA

Case: MiniMELF (SOD-80)
Weight: approx. 31 mg
Cathode band color: black
Packaging codes/options:

GS18/10K per 13" reel (8 mm tape), 10K/box GS08/2.5K per 7" reel (8 mm tape), 12.5K/box

FEATURES







 These devices are protected by a PN junction guard ring against excessive voltage, such as electrostatic discharges



- These diodes are also available in the DO-35 (DO-204AH) case with type designations BAT42 to BAT43 and in the SOD-123 case with type designations BAT42W-V to BAT43W-V
- Material categorization: for definitions of compliance please see <u>www.vishay.com/doc?99912</u>

PARTS TABLE					
PART	ORDERING CODE	CIRCUIT CONFIGURATION	REMARKS		
LL42	LL42-GS18 or LL42-GS08	Single	Tape and reel		
LL43	LL43-GS18 or LL43-GS08	Single	Tape and reel		

ABSOLUTE MAXIMUM RATINGS (T _{amb} = 25 °C, unless otherwise specified)				
PARAMETER	TEST CONDITION	SYMBOL	VALUE	UNIT
Repetitive peak reverse voltage		V _{RRM}	30	V
Forward continuous current (1)		I _F	200	mA
Repetitive peak forward current (1)	$t_p < 1 \text{ s, } \delta < 0.5$	I _{FRM}	500	mA
Surge forward current (1)	t _p = 10 ms	I _{FSM}	4	А
Power dissipation (1)	T _{amb} = 65 °C	P _{tot}	200	mW

Note

⁽¹⁾ Valid provided that electrodes are kept at ambient temperature

THERMAL CHARACTERISTICS (T _{amb} = 25 °C, unless otherwise specified)					
PARAMETER	TEST CONDITION	SYMBOL	VALUE	UNIT	
Thermal resistance junction to ambient air (1)		R _{thJA}	300	K/W	
Junction temperature		Tj	125	°C	
Ambient operating temperature range		T _{amb}	-55 to +125	°C	
Storage temperature range		T _{stg}	-65 to +150	°C	

Note

⁽¹⁾ Valid provided that electrodes are kept at ambient temperature





Vishay Semiconductors

ELECTRICAL CHARACTERISTICS (T _{amb} = 25 °C, unless otherwise specified)							
PARAMETER	TEST CONDITION	PART	SYMBOL	MIN.	TYP.	MAX.	UNIT
Reverse breakdown voltage	I_R = 100 μA (pulsed)		V _(BR)	30			V
Leakage current (1)	V _R = 25 V		I _R			0.5	μA
	V _R = 25 V, T _j = 100 °C		I _R			100	μA
Forward voltage (1)	I _F = 200 mA		V _F			1000	mV
	I _F = 10 mA	LL42	V_{F}			400	mV
	I _F = 50 mA	LL42	V_{F}			650	mV
	$I_F = 2 \text{ mA}$	LL43	V _F	260		330	mV
	I _F = 15 mA	LL43	V_{F}			450	mV
Diode capacitance	V _R = 1 V, f = 1 MHz		C _D		7		pF
Reverse recovery time	I_F = 10 mA, I_R = 10 mA, i_R = 1 mA, R_L = 100 Ω		t _{rr}			5	ns
Rectification efficieny	$R_L = 15 \text{ k}\Omega$, $C_L = 300 \text{ pF}$, $f = 45 \text{ MHz}$, $V_{RF} = 2 \text{ V}$		η_{v}	80			%

Note

TYPICAL CHARACTERISTICS (T_{amb} = 25 °C, unless otherwise specified)








Fig. 3 - Typical Reverse Characteristics




Fig. 2 - Typical Forward Characteristics





Fig. 4 - Typical Capacitance vs. Reverse Voltage


 $^{^{(1)}~}$ Pulse test $t_p < 300~\mu s,\, t_p/T < 0.02$

Vishay Semiconductors

PACKAGE DIMENSIONS in millimeters (inches): MiniMELF (SOD-80)

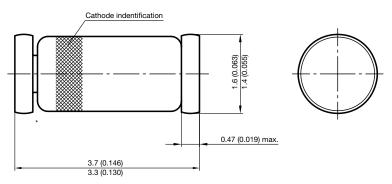

* The gap between plug and glass can be either on cathode or anode side

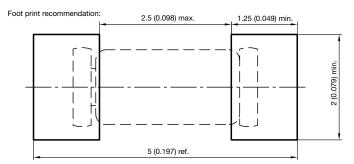

Document no.:6.560-5005.01-4 Rev. 8 - Date: 07.June.2006 96 12070



Legal Disclaimer Notice

Vishay

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.