

Header - PC 4/ 2-G-7,62 - 1804797

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




The figure shows a 5-pos. version of the product

Header, nominal current: 20 A, rated voltage (III/2): 630 V, number of positions: 2, pitch: 7.62 mm, Color: green, contact surface: Tin, mounting: Wave soldering, Mounting flange: Accessory Order No. 1827570

Why buy this product

- ✓ Well-known mounting principle allows worldwide use

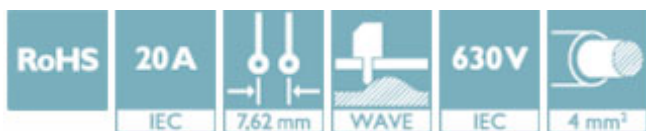

Key Commercial Data

Packing unit	50 STK
Minimum order quantity	50 STK
GTIN	 4 017918 046231
GTIN	4017918046231
Weight per Piece (excluding packing)	3.500 g
Custom tariff number	85366930
Country of origin	Germany

Technical data

Dimensions

Length [l]	29 mm
Pitch	7.62 mm
Dimension a	7.62 mm
Width [w]	15.22 mm
Constructional height	14.25 mm
Height [h]	19.25 mm
Length of the solder pin	5 mm
Pin dimensions	1 x 0,8 mm
Hole diameter	1.3 mm

Header - PC 4/ 2-G-7,62 - 1804797

Technical data

General

Range of articles	PC 4/...-G
Insulating material group	I
Rated surge voltage (III/3)	6 kV
Rated surge voltage (III/2)	6 kV
Rated surge voltage (II/2)	6 kV
Rated voltage (III/3)	400 V
Rated voltage (III/2)	630 V
Rated voltage (II/2)	630 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	20 A
Maximum load current	20 A
Insulating material	PA
Flammability rating according to UL 94	V0
Color	green
Number of positions	2

Standards and Regulations


Connection in acc. with standard	EN-VDE
	CSA
Flammability rating according to UL 94	V0

Environmental Product Compliance


China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Dimensional drawing

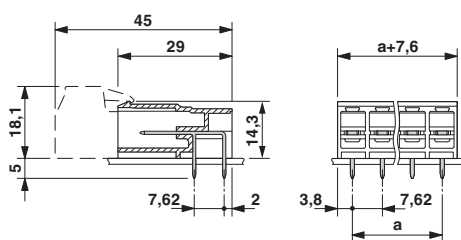


Drilling diagram




Header - PC 4/ 2-G-7,62 - 1804797

Diagram

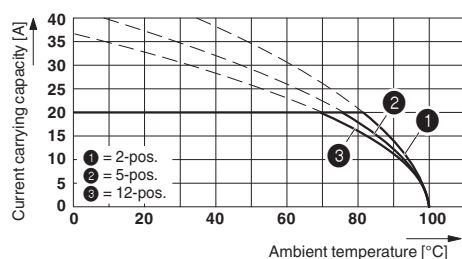


Derating curve for: PC 4/...-ST-7,62 with PC 4/...-G-7,62

Diagram

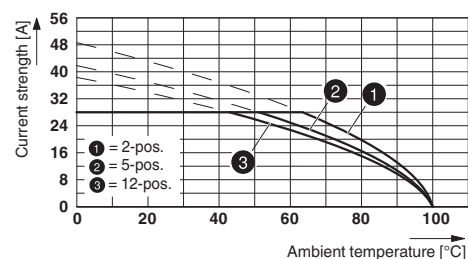

Derating curve for: PC 5/...-ST1-7,62 with PC 4/...-G-7,62
Conductor cross section: 4 mm²

Diagram

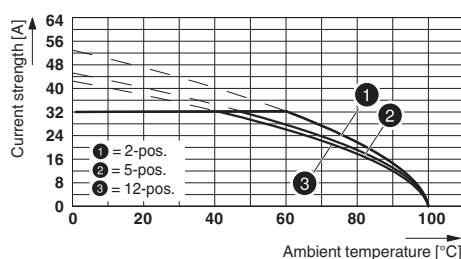

Derating curve for: PC 5/...-ST1-7,62 with PC 4/...-G-7,62
Conductor cross section: 6 mm²

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260704
eCl@ss 7.0	27440402
eCl@ss 8.0	27440402
eCl@ss 9.0	27440402

ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC002637
ETIM 5.0	EC002637
ETIM 6.0	EC002637

UNSPSC

UNSPSC 6.01	30211810
UNSPSC 7.0901	39121409
UNSPSC 11	39121409

Header - PC 4/ 2-G-7,62 - 1804797

Classifications

UNSPSC

UNSPSC 12.01	39121409
UNSPSC 13.2	39121409

Approvals

Approvals

Approvals

CSA / UL Recognized / cUL Recognized / LR / BV / RS / EAC / DNV GL / cULus Recognized

Ex Approvals

Approval details

CSA		13631
	B	C
Nominal current I _N	20 A	20 A
Nominal voltage U _N	300 V	300 V

UL Recognized				http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 60425
	B	C			
Nominal current I _N	20 A	20 A			
Nominal voltage U _N	300 V	300 V			

cUL Recognized				http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 60425
	B	C			
Nominal current I _N	20 A	20 A			
Nominal voltage U _N	300 V	300 V			

LR		http://www.lr.org/en	96/20012
----	---	---	----------

Header - PC 4/ 2-G-7,62 - 1804797

Approvals

BV		http://www.veristar.com/portal/veristarinfo/generalinfo/approved/approvedProducts/equipmentAndMaterials	35433/AO BV
RS		http://www.rs-head.spb.ru/en/index.php	10.04059.250
EAC			B.01742
DNV GL		http://exchange.dnv.com/tari/	TAE00001EZ
cULus Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	

Accessories

Accessories

Coding element

Coding profile - CP-PC RD - 1701967



Coding profile, for plugging into the coding ribs of the plug at a later date, insulating material, color: Red

Flange

Accessories - BF-PC 4 - 1827570



Mounting flange, is snapped onto the left and right of the headers, for screw connection with PC 4/...-STF-7.62

Header - PC 4/ 2-G-7,62 - 1804797

Accessories

Accessories - POWERCOMBICON PCB-SHIELD - 1968387



Additional products

Printed-circuit board connector - PC 4/ 2-ST-7,62 - 1804904



Plug component, nominal current: 20 A, rated voltage (III/2): 630 V, number of positions: 2, pitch: 7.62 mm, connection method: Screw connection with tension sleeve, Color: green, contact surface: Tin

Printed-circuit board connector - PCC 4/ 2-ST-7,62 - 1840191



Plug component, nominal current: 20 A, rated voltage (III/2): 1000 V, number of positions: 2, pitch: 7.62 mm, connection method: Crimp connection, Color: green, Corresponding female crimp contacts with current [A] and conductor cross section range [mm²] data: 13,5A/STG-MTN 0,5-1,0 (3190438); 13,5A/STG-MTN 0,5-1,0 BA (3190629); 20A/STG-MTN 1,5-2,5 (3190506); 20A/STG-MTN 1,5-2,5 BA (3190632). BA = Taped contacts

Printed-circuit board connector - PC 4 HV/ 2-ST-7,62 - 1848892



Plug component, nominal current: 20 A, rated voltage (III/2): 1000 V, number of positions: 2, pitch: 7.62 mm, connection method: Screw connection with tension sleeve, Color: green, contact surface: Tin