


General Purpose Transistor



Description:



A silicon PNP Darlington transistor in a TO-220 type case designed for general-purpose amplifier and low-speed switching applications.

Features:

- High DC Current Gain
- Monolithic Construction with Built-in Base-Emitter Shunt Resistors

**RoHS
Compliant**

PNP



Pin Configuration:

1. Base
2. Collector
3. Emitter
4. Collector

Absolute Maximum Ratings

Parameter	Symbol	Rating	Unit
Collector-Emitter Voltage	V_{CEO}	80	V
Collector-Base Voltage	V_{CBO}	80	
Emitter-Base Voltage	V_{EBO}	5	
Continuous Collector Current Peak	I_C	4 6	A
Total Device Dissipation at $T_c = 25^\circ\text{C}$ Derate above 25°C	P_D	50 0.4	W mW/°C
Total Device Dissipation at $T_c = 25^\circ\text{C}$ Derate above 25°C	P_D	2 0.016	
Operating and Storage Junction Temperature Range	T_j, T_{stg}	-65 to +120	°C
Thermal Resistance, Junction-to-Case	R_{thJC}	2.5	°C/W
Thermal Resistance, Junction-to-Ambient (Note 1)	R_{thJA}	62.5	

Electrical Characteristics ($T_a = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min.	Max.	Unit
-----------	--------	-----------------	------	------	------

OFF Characteristics

Collector - Emitter Breakdown Voltage (Note 2)	$V_{(BR)CEO}$	$I_C=30\text{mA}, I_B=0$	80	-	V
Collector Cut-Off Current	I_{CBO}	$V_{CB}=80\text{V}, I_E=0$	-	1	mA
	I_{CEO}	$V_{CB}=40\text{V}, I_B=0$	-	2	
Emitter Cut-Off Current	I_{EBO}	$V_{EB}=5\text{V}, I_C=0$	-	2	

ON Characteristics (Note 2)

DC Current Gain	h_{FE}	$V_{CE}=4\text{V}, I_C=1\text{A}$	1,000		-
		$V_{CE}=4\text{V}, I_C=2\text{A}$	500		-

General Purpose Transistor

Electrical Characteristics ($T_a = 25^\circ\text{C}$ unless otherwise specified)


Parameter	Symbol	Test Conditions	Min.	Max.	Unit
Collector - Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=2A, I_B=8mA$	-	2.5	V
Base-Emitter On Voltage	$V_{BE(on)}$	$I_C=2A, V_{CE}=4V$	-	2.8	

Dynamic Characteristics

Output Capacitance	C_{obo}	$V_{CB}=10V, I_E=0, f=0.1MHz$	-		pF
--------------------	-----------	-------------------------------	---	--	----

Note 1. $I_C = 1A, L = 100mH, P.R.F = 10Hz, V_{CC} = 20V, R_{BE} = 100\Omega$.

Note 2. Pulse test: Pulse Width $\leq 300\mu s$, Duty Cycle $\leq 2\%$.

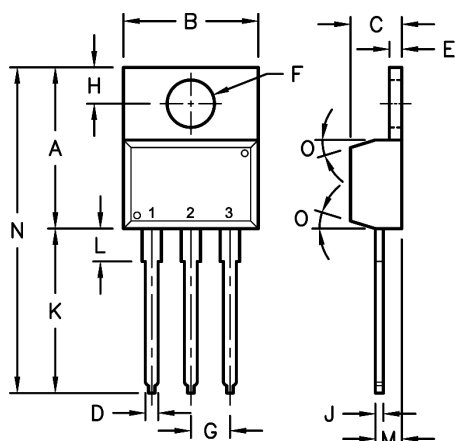

Pin Configuration:

1. Emitter
2. Base
3. Collector

Dimensions	Min.	Max.
A	14.42	16.51
B	9.63	10.67
C	3.56	4.83
D	-	0.9
E	1.15	1.4
F	3.75	3.88
G	2.29	2.79
H	2.54	3.43
J	-	0.56
K	12.7	14.73
L	2.8	4.07
M	2.03	2.92
N	-	31.24
O	7°	

Dimensions : Millimetres

Part Number Table

Description	Part Number
Transistor, PNP, 2A, 60V, TO-220	TIP116

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.