



SOLID STATE INC.

46 FARRAND STREET
BLOOMFIELD, NEW JERSEY 07003

www.solidstateinc.com

RECTIFIERS

High Efficiency, ESP, 2.5 Amp to 20 Amp

1N5802-1N5806
1N5807-1N5811
1N5812-1N5816

FEATURES

- Exceptional Efficiency
- Low Forward Voltage
- Extremely Fast Reverse Recovery Time
- Extremely Fast Forward Recovery Time
- High Surge
- Small Size

DESCRIPTION

This series of High Efficiency Power Rectifiers allows circuit designers to design high current, high frequency supplies to 500 kHz with very low diode losses. The high forward surge capability makes these devices useful in protective circuits.

ABSOLUTE MAXIMUM RATINGS


Peak Inverse Voltage	2.5 Amp Series	6 Amp Series	20 Amp Series
50V	1N5802	1N5807	1N5812
75V	1N5803	1N5808	1N5813
100V	1N5804	1N5809	1N5814
125V	1N5805	1N5810	1N5815
150V	1N5806	1N5811	1N5816

	2.5 AMP SERIES	6.0 AMP SERIES	20 AMP SERIES
Maximum Average D.C. Output Current			
@ $T_L = 75^\circ\text{C}$, $L = \frac{3}{8}"$	2.5A	6.0A	—
@ $T_C = 100^\circ\text{C}$			20.0A
Non-Repetitive Sinusoidal			
Surge Current (8.3ms)	35A	125A	250A
Operating and Storage Temperature Range	—65°C to +175°C		

ELECTRICAL SPECIFICATIONS (at 25°C unless noted)


Type	PIV	Maximum Forward Voltage Drop*	Leakage Current @ PIV		Maximum Reverse Recovery Time I_{FR} I_{RR} I_{REC}	Typical Forward Recovery Time @ 1A Recover to 1V	Typical Forward Recovery Voltage @ 1A $t_r = 8\text{ns}$	Typical Junction Capacitance @ —10V
			25°C	100°C				
1N5802 1N5803 1N5804 1N5805 1N5806	50V 75V 100V 125V 150V	.875 @ 1A	1 μA	50 μA	25ns, 0.5A-0.5A-0.05A	15ns	1.5V	15pf
1N5807 1N5808 1N5809 1N5810 1N5811	50V 75V 100V 125V 150V	.875 @ 4A	5 μA	150 μA	30ns, 1.0-1.0-0.1A	15ns	1.5V	45pf
1N5812 1N5813 1N5814 1N5815 1N5816	50V 75V 100V 125V 150V	.900 @ 10A	10 μA	750 μA	35ns, 1.0-1.0-0.1A	15ns	1.5V	200pf

DO-204AP

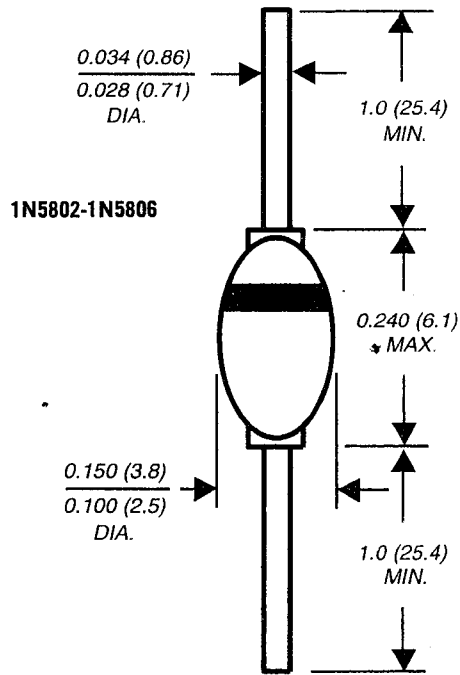

Dimensions in inches and (millimeters)


Case Style G4

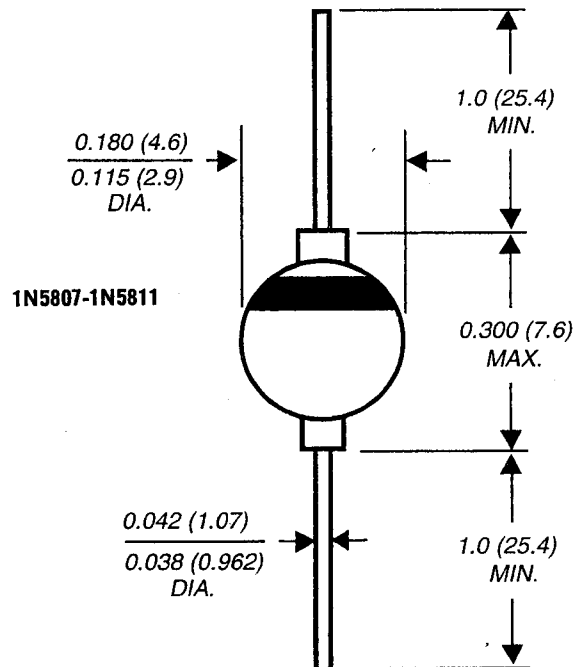

Dimensions in inches and (millimeters)

MECHANICAL SPECIFICATIONS

1N5812-1N5816

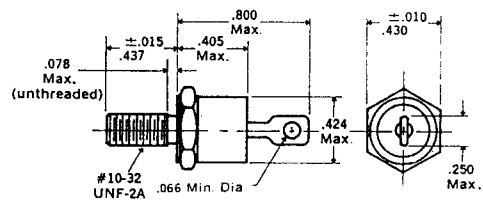

Part Identification: Type number printed on metal case.

Polarity: Cathode to stud end

Max. Weight: 7.0 Grams

Installation Precautions: Maximum unlubricated stud torque:
10 inch pounds

Dimensions in inches.

DO-4

