


- Highest power density in 5.0" x 3.0" footprint
- Supplies 200 W (convection cooling!)
- Highest efficiency up to 95%
- Operating temperature range -25°C to +70°C
- Universal input 85 – 264 VAC
- Compliance with EN 61000-3-2
- Power Back immunity
- Low leakage current
- Protection class I and class II
- 3-year product warranty

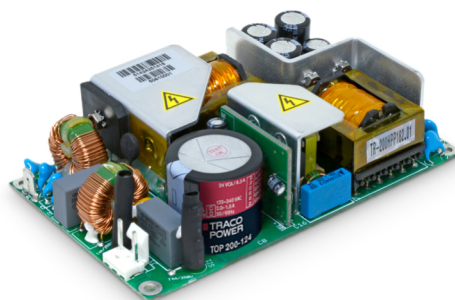

UL 60950-1 IEC 62368-1

The new TOP 200 Series AC/DC Power Supplies feature the highest power rating in the industry standard 3.0" x 5.0" (76.2 x 127 mm) footprint. They can supply up to 200 W output power with convection cooling over an industrial operating temperature range of -25°C to +70°C. This performance could be realized by a state of the art design providing an extremely high efficiency of >90 % which eliminates the need for a dedicated power supply cooling fan.

Compliance with global safety and EMC standards qualify these power supplies for worldwide markets. Approved for Class I and Class II applications, these switchers are suitable for industrial and IT systems but also for consumer products. High reliability is provided by use of industrial quality grade components and an excellent thermal management. This product offers an interesting power supply solution for many space and cost critical applications in commercial and industrial electronic equipment.

Models

Order Code	Output Power max.	Output Voltage nom.	Output Current max.	Efficiency typ.
TOP 200-112	200 W	12 VDC	16'000 mA	93 %
TOP 200-115		15 VDC	13'000 mA	93 %
TOP 200-124		24 VDC	8'300 mA	95 %
TOP 200-148		48 VDC	4'200 mA	95 %

Options

on demand (backorder with MOQ non stocking item)	- Encased version: www.tracopower.com/overview/top200c
--	---

Input Specifications

Input Voltage	Operational Range: 85 - 264 VAC (Full Range) Rated Range: 100 - 240 VAC (Full Range)
Input Frequency	Operational Range: 47 - 63 Hz Certified: 50/60 Hz
Power Consumption	- No load & Vin = 230 VAC 4'000 mW max. - No load & Vin = 115 VAC 5'300 mW max.
Input Inrush Current	- At 230 VAC 40 A max.
Power Factor	- At 230 VAC 0.98 min. (Active Power Factor Correction)
Input Protection	T 4 A (Internal Fuse in L & N)
Recommended Input Fuse	6'000 mA (slow blow) (The need of an external fuse has to be assessed in the final application.)

Output Specifications

Voltage Set Accuracy	±3% max.
Regulation	- Input Variation (Vmin - Vmax) 1% max. - Load Variation (0 - 100%) 1% max.
Ripple and Noise (20 MHz Bandwidth)	12 VDC model: 120 mVp-p max. 15 VDC model: 120 mVp-p max. 24 VDC model: 120 mVp-p max. 48 VDC model: 150 mVp-p max.
Capacitive Load	12 VDC model: 15'000 µF max. 15 VDC model: 15'000 µF max. 24 VDC model: 4'000 µF max. 48 VDC model: 1'000 µF max.
Minimum Load	Not required
Temperature Coefficient	±0.02 %/K max.
Hold-up Time	- At 230 VAC 10 ms min. - At 115 VAC 10 ms min.
Start-up Time	- At 230 VAC 2'000 ms max. - At 115 VAC 3'000 ms max.
Short Circuit Protection	Automatic recovery 60% typ. of Iout nom.
Overload Protection	Foldback Mode
Output Current Limitation	120 - 150% of Iout max.
Overvoltage Protection	150% typ. of Vout nom. (depending on model) 20 V typ. (12 Vout model) 25 V typ. (15 Vout model) 35 V typ. (24 Vout model) 60 V typ. (48 Vout model)
Transient Response	- Peak Variation 600 mV max. (10% to 90% Load Step) - Response Time 20'000 µs max. (10% to 90% Load Step)

Safety Specifications

Standards	- IT / Multimedia Equipment - Certification Documents	EN 60950-1 EN 62368-1 IEC 60950-1 IEC 62368-1 UL 60950-1 www.tracopower.com/top200-safety-cert
Protection Class	See application note:	Class I & II (Prepared): Reinforced Insulation www.tracopower.com/info/protection-class.pdf
Energy Source	- Output, acc. to 62368-1	ES1
Power Source	- Output, acc. to 62368-1	PS3

All specifications valid at 230 VAC, resistive full load and +25°C after warm-up time, unless otherwise stated.

Pollution Degree	PD 2
Over Voltage Category	OVC II

EMC Specifications

EMI (Emissions)		EN 61000-6-3 (Generic Residential) EN 55032 class A (internal filter) EN 55032 class B (internal filter) EN 55032 class A (internal filter) EN 55032 class B (internal filter) EN 61000-3-2, class A (conductive plane to be connected to safety earth to meet all EMI specifications)
EMS (Immunity)	- Conducted Emissions	
	- Radiated Emissions	
	- Harmonic Current Emissions	
	- RF Electromagnetic Field	EN 61000-4-3, 20 V/m, perf. criteria A
	- EFT (Burst) / Surge	EN 61000-4-4, ± 2 kV, perf. criteria B
		L to L: EN 61000-4-5, ± 1 kV, perf. criteria B
		L to PE: EN 61000-4-5, ± 2 kV, perf. criteria B
	- Conducted RF Disturbances	EN 61000-4-6, 10 Vrms, perf. criteria A
	- PF Magnetic Field	Continuous: EN 61000-4-8, 100 A/m, perf. criteria A
	- Voltage Dips & Interruptions	230 VAC / 50 Hz: EN 61000-4-11
		20%, 250 periods, perf. criteria A
		30%, 25 periods, perf. criteria A
		60%, 10 periods, perf. criteria B
		>95%, 1 period, perf. criteria B
		115 VAC / 60 Hz: EN 61000-4-11
		20%, 250 periods, perf. criteria A
		30%, 25 periods, perf. criteria B
		60%, 10 periods, perf. criteria B
		>95%, 1 period, perf. criteria B
EMC / Environmental	- Certification Documents	www.tracopower.com/top200-emc-cert

General Specifications

Relative Humidity		95% max. (non condensing)
Temperature Ranges	- Operating Temperature	-25°C to +70°C
	- Storage Temperature	-40°C to +80°C
Power Derating	- High Temperature	2.0 %/K above 40°C (12 & 15 Vout models)
		2.0 %/K above 50°C (24 & 48 Vout models)
	- Low Input Voltage	1.0 %/V below 115 VAC (12 & 15 Vout models)
		1.5 %/V below 108 VAC (24 & 48 Vout models)
Cooling System		Natural convection (20 LFM)
Remote Control	- Voltage Controlled Remote	See application note: www.tracopower.com/top200-remote
	- Current Controlled Remote	See application note: www.tracopower.com/top200-remote
Altitude During Operation		2'000 m max.
Regulator Topology		LLC Converter
Switching Frequency		100 kHz typ. (PWM)
Insulation System		Reinforced Insulation
Isolation Test Voltage	- Input to Output, 60 s	3'000 VAC
	- Input to Case or PE, 60 s	1'500 VAC
	- Output to Case or PE, 60 s	500 VAC
Creepage	- Input to Output	7 mm min.
	- Input to Case or PE	4 mm min.
	- Output to Case or PE	1 mm min.
Clearance	- Input to Output	5 mm min.
	- Input to Case or PE	2.5 mm min.
	- Output to Case or PE	0.5 mm min.
Isolation Resistance		100 M Ω min.
Isolation Capacitance		1'500 pF typ.

All specifications valid at 230 VAC, resistive full load and +25°C after warm-up time, unless otherwise stated.


Leakage Current	- Earth Leakage Current	500 μ A max.
	- Touch Current	100 μ A max.
Reliability	See application note: www.tracopower.com/top200-mtbf	
Environment	- Vibration	IEC 60068-2-6 3 axis, sine sweep, 10-55 Hz, 0.075 mm
	- Mechanical Shock	IEC 60068-2-27 15 g, 3 axis, half sine, 11 ms
Housing Type	Open Frame	
Mounting Type	Chassis Mount	
Connection Type	Pin Connector	
Weight	360 g	
Power Back Immunity	12 VDC model:	16 V max. (18 V for 1 s)
	15 VDC model:	20 V max. (23 V for 1 s)
	24 VDC model:	35 V max. (40 V for 1 s)
	48 VDC model:	63 V max. (68 V for 1 s)
Environmental Compliance	- REACH Declaration	www.tracopower.com/info/reach-declaration.pdf REACH SVHC list compliant REACH Annex XVII compliant
	- RoHS Declaration	www.tracopower.com/info/rohs-declaration.pdf Exemptions: 7(a), 7(c)-I (RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule).)
	- SCIP Reference Number	127e15dd-c33c-4469-8c0f-3977268632f2

Additional Information

Supporting Documents	www.tracopower.com/overview/top200
Frequently Asked Questions	www.tracopower.com/glossary-faq
Glossary	www.tracopower.com/info/glossary.pdf
Service Portal	www.tracoserviceportal.com

All specifications valid at 230 VAC, resistive full load and +25°C after warm-up time, unless otherwise stated.

Outline Dimensions

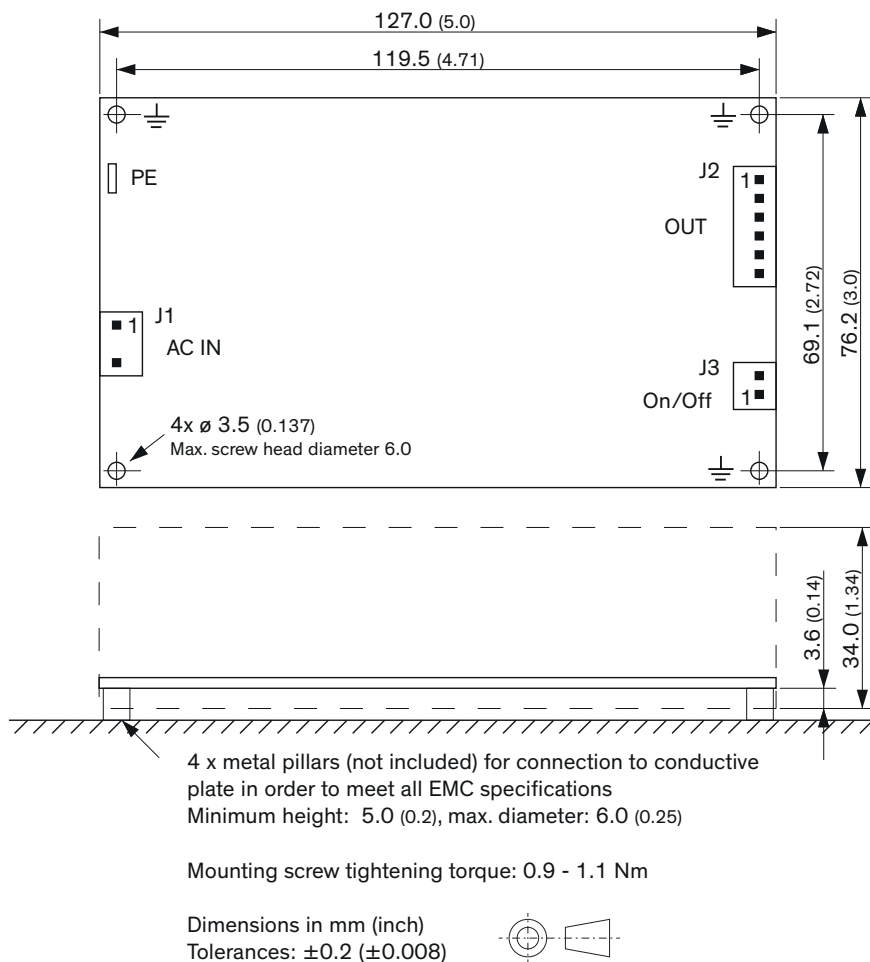

Input	
J1	
Pin	Function
1	AC (L)
2	AC (N)

Output	
J2	
Pin	Function
1-3	+ Vout
4-6	- Vout

On / Off	
J3	
Pin	Function
1	-
2	+

Input Connector

PCB terminal: Molex 41791-26-62-4030
Terminal Housing: Molex 2139-09-50-3031
Crimp Terminal: Molex 2478-08-52-0072

Output Connector

PCB terminal: Molex 2139-26-60-4060
Terminal Housing: Molex 2139-09-50-3061
Crimp Terminal: Molex 2478-08-52-0072

On/Off Connector

PCB terminal: Molex KK 22-27-2021
Terminal Housing: Molex KK 22-01-2025
Crimp Terminal: Molex KK 08-50-0032

Note: The size of the wires has to be assessed in the final application.