


Data Sheet

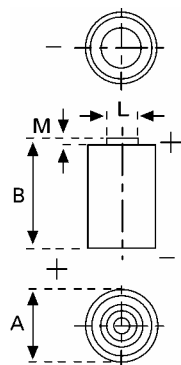

Type Number 6215
Designation IEC CR 17345
System Li-Manganese dioxide / Organic Electrolyte

UL Recognition:..... MH13654.(N)
Nominal Voltage 3 V
Typical Capacity C 1500 mAh
 Load 200 Ohm, at 20 °C down to 2 V

Weight (approx.) 16 g
Volume 7 ccm
Coding..... Date of Manufacturing Quarter / Year

Temperature Ranges	min	max.
Storage	-30 °C	65 °C
Discharge	-20 °C	65 °C

Dimensions	min	max.
Diameter (A)	16	17
Height (B)	32,4	33,9
Shoulder Diameter[L].....	6,1	
Shoulder Height [M].....	1	

Segment Electronic

Main Applications Photo
 Electronic Devices

Typical Capacities (at 20 °C)

Discharge Type	Load	End Voltage:	2.0 V
Continuous 24h/d,7d/w	200 Ω	Time:	108 h
		Capacity [mAh]:	1500
		Energy [mWh]:	4190

All Data contained herein is for single cells

For battery applications, performance data may vary from single cell data, depending on specific battery configuration

VARTA Microbattery GmbH, Daimlerstr. 1, D-73479 Ellwangen/Jagst
 Tel.: (+49) 7961/921-0, Telefax: (+49) 7961/921-553

Subject to change without prior notice!
 Date of issue: 2008-06-02