


## Data Sheet

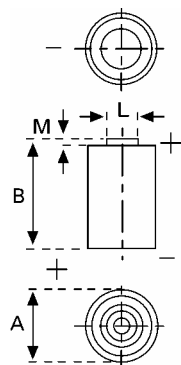

**Type Number** ..... 6205  
**Designation IEC** ..... CR 17345  
**System** ..... Li-Manganese dioxide / Organic Electrolyte

**UL Recognition:**..... MH 13654 (N)  
**Nominal Voltage** ..... 3 V  
**Typical Capacity C** ..... 1550 mAh  
 Load 100 Ohm, at 20 °C down to 2 V

**Weight (approx.)** ..... 17 g  
**Volume** ..... 7 ccm  
**Coding**..... Date of Manufacturing Month / Year

**Temperature Ranges**  
 Storage ..... min -20 °C max. 45 °C  
 Discharge ..... min -40 °C max. 70 °C\*)

**Dimensions**  
 Diameter (A) ..... min 16,4 max. 17,0  
 Height (B) ..... 33,8 34,5  
 Shoulder Diameter[L]..... 6,2 6,4  
 Shoulder Height [M]..... 1,18 1,23

**Segment** ..... Electronic

**Main Applications** ..... Photo Electronic Devices

### Typical Capacities (at 20 °C)

| Discharge Type            | Load  | End Voltage: 2.0 V   |
|---------------------------|-------|----------------------|
| Continuous<br>24h/d, 7d/w | 100 Ω | Capacity [mAh]: 1550 |

\*) Typical temperature range is -20 °C to +60 °C, contact VARTA if the application is intended to be outside the range of -20 °C to +60 °C.