



Coil Data

Nominal Voltage : 5V DC, 12V DC and 24V DC
 Nominal Power : 150mW, 250mW and 540mW

Contact Data

Contact Form : 1 form A
 Contact Material : AgAlloy
 Contact Rating : 10A 250V AC / 30V DC, TV-5.
 Max. Switching Voltage : 250V AC / 30V DC
 Max. Switching Current : 10A
 Max. Switching Power : 2,500VA, 300W
 Min. Switching Load : 5V DC, 100mA
 Max. Contact Resistance : 100mΩ (6V DC 1A)

Life

Electrical : 100,000 operations
 Mechanical : 2,000,000 operations

General Data

Min. Insulation Resistance : 1,000MΩ 500V DC
 Dielectric Strength : 1,000V AC, 1 min between open contacts.
 4,000V AC, 1 min between coil and contacts.
 Sure Strength : 10,000V AC
 Max. Operate Time : 15ms.
 Max. Release Time : 8ms.
 Operate Temperature : -40 to +70°C.

Shock Resistance

Endurance : 1,000m/s²
 Misoperation : 100m/s²


Vibration Resistance

Endurance : 10 to 55Hz, 1.5mm double amplitude.
 Misoperation : 10 to 55Hz, 1.5mm double amplitude.
 Humidity : 35% to 95%RH, +40°C.


Specification Table

Part Number	Nominal Voltage V DC	Coil Resistance Ω ±10%	Operate Voltage ≤ V DC	Release Voltage ≥ V DC	Coil Power mW
MCHRM3H-DC5V-A	5	100	3.75	0.5	250
MCHRM3H-DC12V-A	12	576	9	1.2	
MCHRM3H-DC24V-A	24	2304	18	2.4	

Diagram

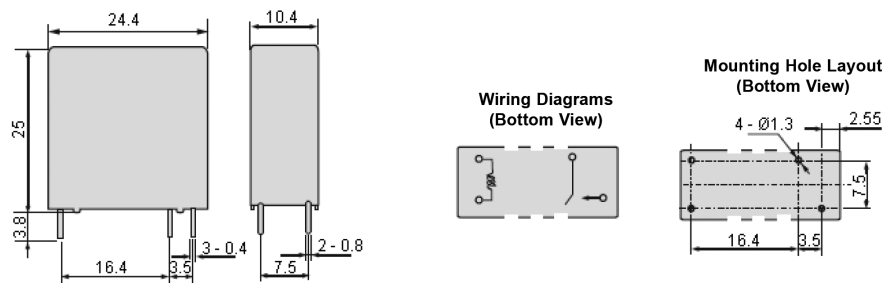

Characteristic Chart Data

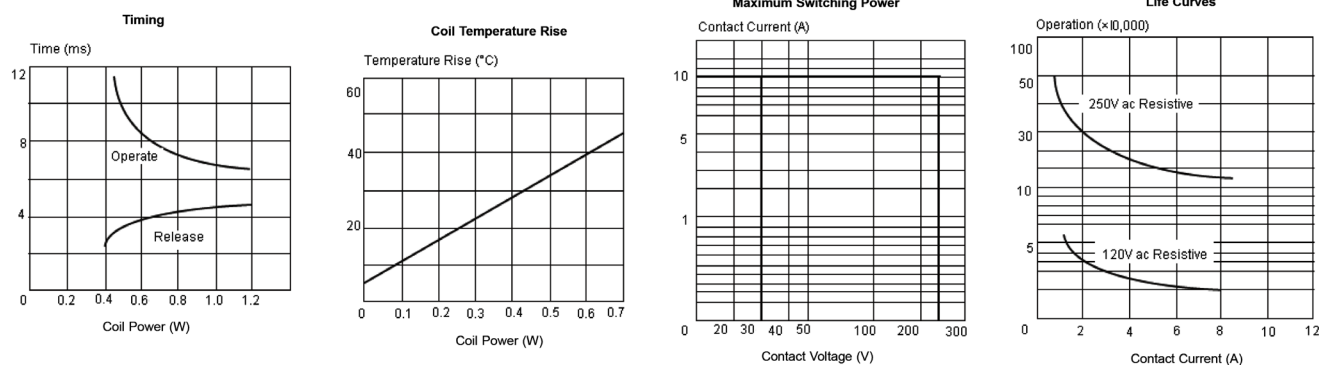

Part Number Table

Description	Part Number
Relay, Power, SPST, 5V DC Coil, 0.25W	MCHRM3H-DC5V-A
Relay, Power, SPST, 12V DC Coil, 0.25W	MCHRM3H-DC12V-A
Relay, Power, SPST, 24V DC Coil, 0.25W	MCHRM3H-DC24V-A

Dimensions : Millimetres

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro