

SLIDE-IN MOUNT CONTACTS




- Economical and reliable contacts are ideal for molded cases with self contained battery compartments
- Solder "ear" to facilitate soldering of wire lead
- Unique spring tension contact adjusts to variations in battery lengths
- Reliable spring tension contacts assure low contact resistance
- Clips easily onto .060 (1.52) to .070 (1.78) wall
- Sharp barbs securely anchor contact

Refer to page 34 for Battery Contact Layout & Mounting Details


"AA" - "CR2" - "A" - "9V"

- Press fit into housing groove.





CAT. NO. 5205

MATERIAL: .012 (.30) Spring Steel, Nickel Plate




CAT. NO. 5209

MATERIAL: .012 (.30) Phosphor Bronze, Nickel Plate

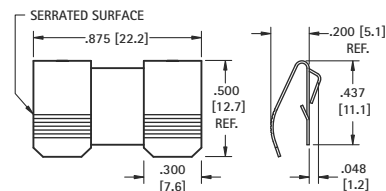

CAT. NO. 5206

MATERIAL: .012 (.30) Spring Steel, Nickel Plate

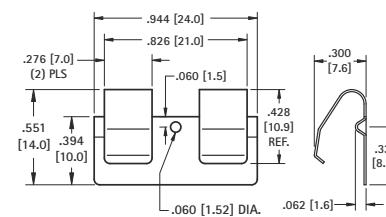

CAT. NO. 5208

MATERIAL: .012 (.30) Phosphor Bronze, Nickel Plate

SLIDE-IN P.C. MOUNT CONTACTS


- Economical and reliable contacts
- Designed for direct placement onto PCB, no wire leads required
- Unique spring tension adjusts to variations in battery length

- Reliable spring tension assure low contact resistance and dependable connection
- Symmetrical design allows these contacts to function both as a positive and negative contacts


"AAA" - "AAAA" - "N" - "12V"

UNIVERSAL BATTERY SIZES

MATERIAL: .012 (.30) Phosphor Bronze, Tin-Nickel plate

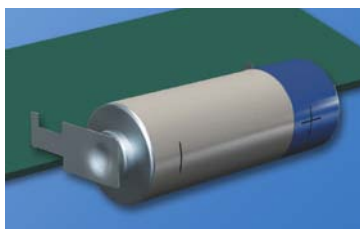


- "Off-Board" edge mounting design frees up valuable board space




CAT. NO. 230-1

MATERIAL: .008 (.20) Spring Steel, Nickel plate




CAT. NO. 1021-1



CAT. NO.	(L) Length
109-2	.840 (21.3)
109-3	1.000 (25.4)


MATERIAL: .012 (.30) Spring Steel, Nickel plate



CAT. NO. 1017-1



- Made from corrosion resistant Stainless Steel



CAT. NO. 108-2

MATERIAL: .012 (.30) Stainless Steel, Tin-Nickel plate