


Attachable heatsink for TO 220 with a bottom plate thickness of 0.5 mm

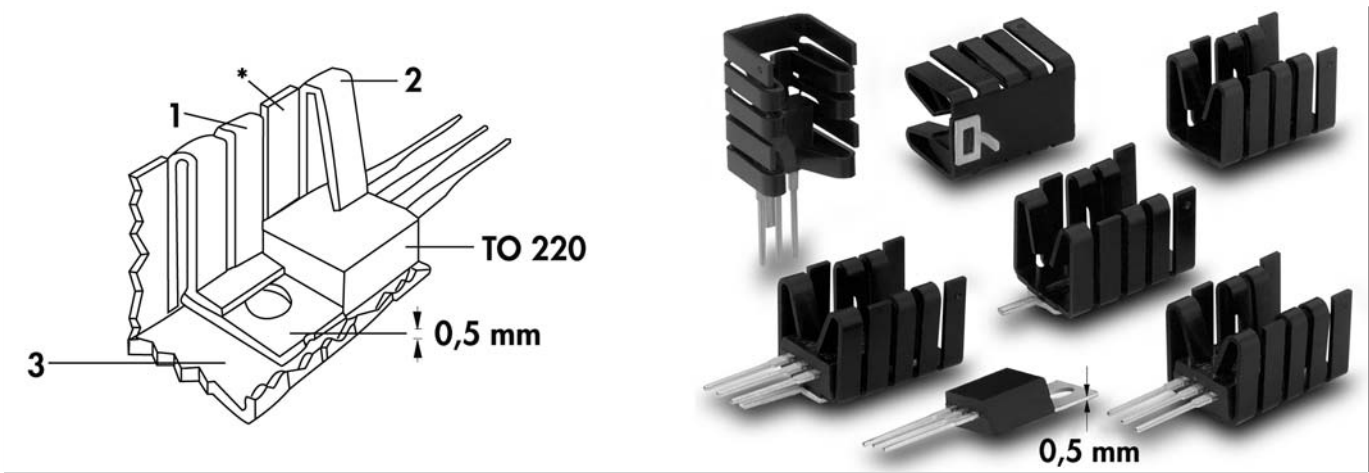

- narrow version with better thermal resistance
- max. 14.5 mm wide
- 3 different lengths for varied dissipation power
- takes less space than any other attachable heatsink
- simple assembly by pushing the heatsink onto the TO 220 housing
- the cooling fingers form spring clamps (1+2), which pushes the TO 220 and it's mounting flange onto the heatsink (3)
- optimum heat transfer due the constant pressure on the entire contact surface of the TO 220 cases
- effective heat emmision with horizontal and vertical mounting

with tinned soldering lug for direct soldering onto circuit board, for vertical installation

art. no.	A [mm]	R _{th} [K/W]	
FK 252 SA 220 V	6.35	21	

* = touch in edge of transistor

material: aluminium
surface treatment: black anodised