


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

RoHS Compliant

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
L	ECN 4422: ADDED 4 METER LENGTH AND NEW FORMAT	12/3/09	D.FRISIELLO
L	ECN 99999: ADD L-COM LOGO TO TYPE A OVERMOLD	12/18/09	D.FRISIELLO
M	ECN 5868: ADDED LENGTHS 03 M, 075 M, REVISED PACKAGING NOTE	12/8/11	D.FRISIELLO
N	ECN6237: ADDED CONTACT PLATING NOTE. UPDATED FORMAT.	09/14/12	DFP

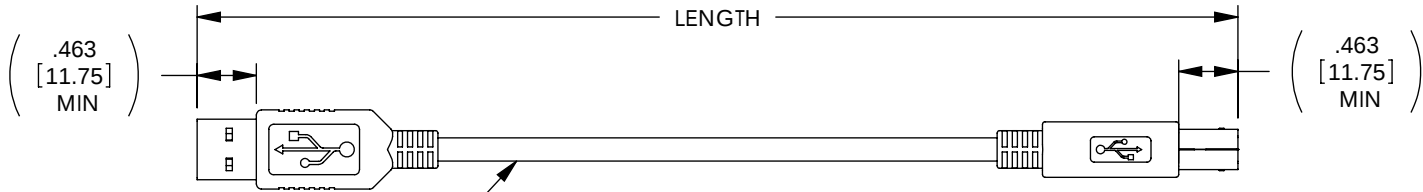


ONE 28AWG STRANDED TINNED COPPER TWISTED PAIR
TWO 20AWG STRANDED TINNED COPPER CONDUCTORS
OVERALL ALUMINIZED POLYESTER SHIELD WITH DRAIN WIRE
PLUS TINNED COPPER BRAIDED SHIELD.
PVC OUTER JACKET, LIGHT GRAY (PANTONE 400C)

MOLDED HOOD
AND STRAIN RELIEF,
PVC, LIGHT GRAY
(PANTONE 400C)

PIN 1
DIELECTRIC
AREA
"P1"
SERIES A
USB PLUG
CONTACTS: 30 X INCHES
GOLD PLATING

PIN 1
"P2"
SERIES B
USB PLUG
CONTACTS: 30 X INCHES
GOLD PLATING

MOLDED HOOD
AND STRAIN RELIEF,
PVC, LIGHT GRAY (PANTONE 400C)

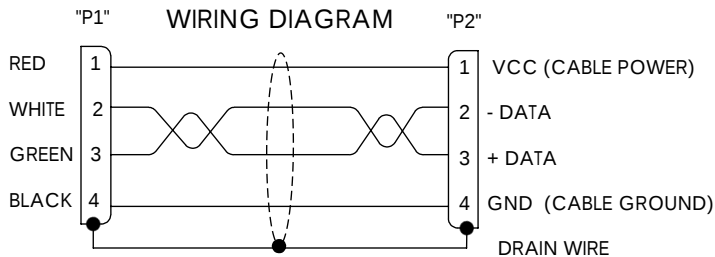

MODEL NUMBER	LENGTH METERS [FEET]
CSMUAB-03M	0.3 [.98]
CSMUAB-05M	0.5 [1.64]
CSMUAB-075M	0.75 [2.46]
CSMUAB-1M	1.0 [3.28]
CSMUAB-2M	2.0 [6.56]
CSMUAB-3M	3.0 [9.84]
CSMUAB-4M	4.0 [13.12]
CSMUAB-5M	5.0 [16.40]

NOTES:

1. CABLE ASSEMBLY SHALL HAVE 360Å SHIELD TERMINATION.
2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: 012 [305] = +1 [25] / -0 >12 [305] 060 [1524] = +2 [51] / -0 >60 [1524] 0120 [3048] = +4 [102] / -0 >120 [3048] 0300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = 0.2 .XX = 0.02 .XXX = 0.005 PROJECTION 	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	DRAWN BY TJC	09/25/00		
	CHECKED BY DFP	09/28/00	CATEGORY USB	
	APPROVED BY RC	09/28/00	PRODUCT DESCRIPTION CABLE, USB TYPE A/B	
COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. CSMUAB	REV. N
	SCALE: NONE	CAD FILE: CSMUAB.SLDDRW	SHEET 1 OF 1	