

## DC/DC converters - QUINT-PS/24DC/24DC/10 - 2320092

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Primary-switched QUINT DC/DC converter for DIN rail mounting with SFB (Selective Fuse Breaking) Technology, input: 24 V DC, output: 24 V DC/10 A

### Product Description

QUINT DC/DC converter with maximum functionality

DC/DC converters alter the voltage level, regenerate the voltage at the end of long cables or enable the creation of independent supply systems by means of electrical isolation.

QUINT DC/DC converters magnetically and therefore quickly trip circuit breakers with six times the nominal current, for selective and therefore cost-effective system protection. The high level of system availability is additionally ensured, thanks to preventive function monitoring, as it reports critical operating states before errors occur.

### Why buy this product

- ✓ Reliable starting of difficult loads, thanks to the static POWER BOOST power reserve with up to 125% nominal current permanently
- ✓ Preventive function monitoring indicates critical operating states before errors occur
- ✓ Constant voltage: output voltage regenerated even at the end of long cables
- ✓ Support conversion to various voltage levels
- ✓ Electrical isolation: for setting up independent supply systems



### Key Commercial Data

|                                      |                                                                                                         |
|--------------------------------------|---------------------------------------------------------------------------------------------------------|
| Packing unit                         | 1 STK                                                                                                   |
| GTIN                                 | <br>4 046356 481885 |
| GTIN                                 | 4046356481885                                                                                           |
| Weight per Piece (excluding packing) | 900.000 g                                                                                               |
| Custom tariff number                 | 85044030                                                                                                |
| Country of origin                    | China                                                                                                   |

### Technical data

#### Dimensions

|        |        |
|--------|--------|
| Width  | 48 mm  |
| Height | 130 mm |
| Depth  | 125 mm |

## DC/DC converters - QUINT-PS/24DC/24DC/10 - 2320092

### Technical data

#### Dimensions

|                                  |        |
|----------------------------------|--------|
| Width with alternative assembly  | 122 mm |
| Height with alternative assembly | 130 mm |
| Depth with alternative assembly  | 51 mm  |

#### Ambient conditions

|                                                |                                              |
|------------------------------------------------|----------------------------------------------|
| Degree of protection                           | IP20                                         |
| Ambient temperature (operation)                | -25 °C ... 70 °C (> 60 °C Derating: 2,5 %/K) |
| Ambient temperature (storage/transport)        | -40 °C ... 85 °C                             |
| Max. permissible relative humidity (operation) | ≤ 95 % (at 25 °C, non-condensing)            |
| Noise immunity                                 | EN 61000-6-2:2005                            |

#### Input data

|                                     |                                            |
|-------------------------------------|--------------------------------------------|
| Nominal input voltage range         | 24 V DC                                    |
| Input voltage range                 | 18 V DC ... 32 V DC                        |
| Current consumption                 | 14 A (24 V, I <sub>BOOST</sub> )           |
| Inrush surge current                | < 15 A (typical)                           |
| Power failure bypass                | > 12 ms (24 V DC)                          |
| Input fuse                          | 25 A (internal (device protection))        |
| Choice of suitable circuit breakers | 16 A ... 20 A (Characteristics B, C, D, K) |
| Type of protection                  | Transient surge protection                 |
| Protective circuit/component        | Varistor                                   |

#### Output data

|                                                         |                                                                 |
|---------------------------------------------------------|-----------------------------------------------------------------|
| Nominal output voltage                                  | 24 V DC ±1 %                                                    |
| Setting range of the output voltage (U <sub>Set</sub> ) | 18 V DC ... 29.5 V DC (> 24 V DC, constant capacity restricted) |
| Nominal output current (I <sub>N</sub> )                | 10 A (-25 °C ... 60 °C)                                         |
| POWER BOOST (I <sub>Boost</sub> )                       | 12.5 A (-25 °C ... 40 °C permanent, U <sub>OUT</sub> = 24 V DC) |
| Selective Fuse Breaking (I <sub>SFB</sub> )             | 60 A (12 ms)                                                    |
| Derating                                                | 60 °C ... 70 °C (2.5%/K)                                        |
| Connection in parallel                                  | Yes, for redundancy and increased capacity                      |
| Connection in series                                    | yes                                                             |
| Max. capacitive load                                    | Unlimited                                                       |
| Active current limitation                               | Approx. 18 A                                                    |
| Control deviation                                       | < 1 % (change in load, static 10 % ... 90 %)                    |
|                                                         | < 2 % (change in load, dynamic 10 % ... 90 %)                   |
|                                                         | < 0.1 % (change in input voltage ±10 %)                         |
| Residual ripple                                         | < 20 mV <sub>PP</sub>                                           |
| Peak switching voltages nominal load                    | < 10 mV <sub>PP</sub> (20 MHz)                                  |
| Maximum power dissipation in no-load condition          | 1.6 W                                                           |
| Power loss nominal load max.                            | 24 W                                                            |

#### General

|            |        |
|------------|--------|
| Net weight | 0.9 kg |
|------------|--------|

## DC/DC converters - QUINT-PS/24DC/24DC/10 - 2320092

### Technical data

#### General

|                                 |                                                                                 |
|---------------------------------|---------------------------------------------------------------------------------|
| Efficiency                      | > 92 %                                                                          |
| Insulation voltage input/output | 1.5 kV (type test)                                                              |
|                                 | 1 kV (routine test)                                                             |
| Protection class                | III                                                                             |
|                                 | > 763000 h (40°C)                                                               |
| Mounting position               | horizontal DIN rail NS 35, EN 60715                                             |
| Assembly instructions           | Alignable: 5 mm horizontally, 15 mm next to active components, 50 mm vertically |

#### Connection data, input

|                                       |                            |
|---------------------------------------|----------------------------|
| Connection method                     | Pluggable screw connection |
| Conductor cross section solid min.    | 0.2 mm <sup>2</sup>        |
| Conductor cross section solid max.    | 2.5 mm <sup>2</sup>        |
| Conductor cross section flexible min. | 0.2 mm <sup>2</sup>        |
| Conductor cross section flexible max. | 2.5 mm <sup>2</sup>        |
| Conductor cross section AWG min.      | 24                         |
| Conductor cross section AWG max.      | 12                         |
| Stripping length                      | 8 mm                       |
| Screw thread                          | M3                         |

#### Connection data, output

|                                       |                            |
|---------------------------------------|----------------------------|
| Connection method                     | Pluggable screw connection |
| Conductor cross section solid min.    | 0.2 mm <sup>2</sup>        |
| Conductor cross section solid max.    | 2.5 mm <sup>2</sup>        |
| Conductor cross section flexible min. | 0.2 mm <sup>2</sup>        |
| Conductor cross section flexible max. | 2.5 mm <sup>2</sup>        |
| Conductor cross section AWG min.      | 24                         |
| Conductor cross section AWG max.      | 12                         |
| Stripping length                      | 7 mm                       |
| Screw thread                          | M3                         |

#### Connection data for signaling

|                                       |                     |
|---------------------------------------|---------------------|
| Conductor cross section solid min.    | 0.2 mm <sup>2</sup> |
| Conductor cross section solid max.    | 2.5 mm <sup>2</sup> |
| Conductor cross section flexible min. | 0.2 mm <sup>2</sup> |
| Conductor cross section flexible max. | 2.5 mm <sup>2</sup> |
| Conductor cross section AWG min.      | 24                  |
| Conductor cross section AWG max.      | 12                  |
| Screw thread                          | M3                  |

#### Standards and Regulations

|                               |                                                                   |
|-------------------------------|-------------------------------------------------------------------|
| Electromagnetic compatibility | Conformance with EMC Directive 2014/30/EU                         |
| Shock                         | 18 ms, 30g, in each space direction (according to IEC 60068-2-27) |

## DC/DC converters - QUINT-PS/24DC/24DC/10 - 2320092


### Technical data

#### Standards and Regulations

|                                                                                                                                  |                                                                                  |
|----------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
| Noise immunity                                                                                                                   | EN 61000-6-2:2005                                                                |
| Connection in acc. with standard                                                                                                 | CUL                                                                              |
| Standards/regulations                                                                                                            | EN 61000-4-2                                                                     |
|                                                                                                                                  | EN 61000-4-3                                                                     |
|                                                                                                                                  | EN 61000-4-4                                                                     |
|                                                                                                                                  | EN 61000-4-5                                                                     |
|                                                                                                                                  | EN 61000-4-6                                                                     |
| Standard - Electrical safety                                                                                                     | EN 60950-1/VDE 0805 (SELV)                                                       |
| Standard – Electronic equipment for use in electrical power installations and their assembly into electrical power installations | EN 50178/VDE 0160 (PELV)                                                         |
| Standard – Safety extra-low voltage                                                                                              | EN 60950-1 (SELV)                                                                |
|                                                                                                                                  | EN 60204 (PELV)                                                                  |
| Standard - Safe isolation                                                                                                        | DIN VDE 0100-410                                                                 |
| Shipbuilding approval                                                                                                            | Germanischer Lloyd (EMC 1)                                                       |
| UL approvals                                                                                                                     | UL/C-UL listed UL 508                                                            |
|                                                                                                                                  | UL/C-UL Recognized UL 60950                                                      |
|                                                                                                                                  | UL ANSI/ISA-12.12.01 Class I, Division 2, Groups A, B, C, D (Hazardous Location) |
| Vibration (operation)                                                                                                            | < 5 Hz, amplitude $\pm 1.6$ mm (according to IEC 60068-2-6)                      |
|                                                                                                                                  | 5 Hz ... 100 Hz, 4g, 90 min.                                                     |
| Rail applications                                                                                                                | EN 50121-4                                                                       |

### Drawings

Block diagram

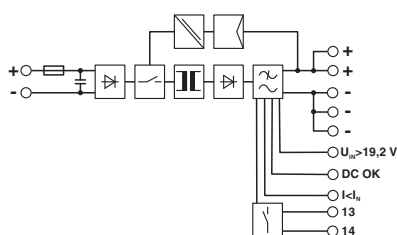

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27250311 |
| eCl@ss 4.1 | 27250311 |
| eCl@ss 5.0 | 27242213 |
| eCl@ss 5.1 | 27242213 |
| eCl@ss 6.0 | 27049005 |
| eCl@ss 7.0 | 27049005 |

## DC/DC converters - QUINT-PS/24DC/24DC/10 - 2320092

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 8.0 | 27210901 |
| eCl@ss 9.0 | 27210901 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 4.0 | EC002542 |
| ETIM 5.0 | EC002046 |
| ETIM 6.0 | EC002046 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211502 |
| UNSPSC 7.0901 | 39121004 |
| UNSPSC 11     | 39121004 |
| UNSPSC 12.01  | 39121004 |
| UNSPSC 13.2   | 39121041 |

### Approvals

#### Approvals

#### Approvals

UL Recognized / UL Listed / cUL Recognized / cUL Listed / IEC CB Scheme / GL / ABS / BV / RINA / NK / LR / DNV / EAC / EAC / PRS / cULus Recognized / cULus Listed

#### Ex Approvals

UL Listed / cUL Listed / cULus Listed

#### Approval details

|               |                                                                                     |                                                                                                                                                       |               |
|---------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| UL Recognized |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 211944 |
|---------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|

|           |                                                                                     |                                                                                                                                                       |               |
|-----------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| UL Listed |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 123528 |
|-----------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|

|                |                                                                                     |                                                                                                                                                       |               |
|----------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| cUL Recognized |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 211944 |
|----------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|

## DC/DC converters - QUINT-PS/24DC/24DC/10 - 2320092

### Approvals

|                                |                                                                                     |                                                                                                                                                                                                                               |                  |
|--------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| cUL Listed                     |    | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>                                                                         | FILE E 123528    |
| IECEE CB Scheme                |    | <a href="http://www.iecee.org/">http://www.iecee.org/</a>                                                                                                                                                                     | DK-5535-M1       |
| GL                             |    | <a href="http://www.gl-group.com/newbuilding/approvals/index.html">http://www.gl-group.com/newbuilding/approvals/index.html</a>                                                                                               | 20695-11 HH      |
| ABS                            |    | <a href="http://www.eagle.org/eagleExternalPortalWEB/">http://www.eagle.org/eagleExternalPortalWEB/</a>                                                                                                                       | 15-GD1363806-PDA |
| BV                             |  | <a href="http://www.veristar.com/portal/veristarinfo/generalinfo/approved/approvedProducts/equipmentAndMaterials">http://www.veristar.com/portal/veristarinfo/generalinfo/approved/approvedProducts/equipmentAndMaterials</a> | 27662-A2 BV      |
| RINA                           |  | <a href="http://www.rina.org/en">http://www.rina.org/en</a>                                                                                                                                                                   | ELE112814XG      |
| NK                             |  | <a href="http://www.classnk.or.jp/hp/en/">http://www.classnk.or.jp/hp/en/</a>                                                                                                                                                 | 12A013           |
| LR                             |  | <a href="http://www.lr.org/en">http://www.lr.org/en</a>                                                                                                                                                                       | 12/20030         |
| DNV                            |  | <a href="http://exchange.dnv.com/tari/">http://exchange.dnv.com/tari/</a>                                                                                                                                                     | E-13913          |
| mm <sup>2</sup> /AWG/kcmil     |                                                                                     | 4                                                                                                                                                                                                                             |                  |
| Nominal current I <sub>N</sub> |                                                                                     | 15 A                                                                                                                                                                                                                          |                  |
| Nominal voltage U <sub>N</sub> |                                                                                     | 750 V                                                                                                                                                                                                                         |                  |

## DC/DC converters - QUINT-PS/24DC/24DC/10 - 2320092

### Approvals

|     |                                                                                   |               |
|-----|-----------------------------------------------------------------------------------|---------------|
| EAC |  | EAC-Zulassung |
|-----|-----------------------------------------------------------------------------------|---------------|

|     |                                                                                   |                          |
|-----|-----------------------------------------------------------------------------------|--------------------------|
| EAC |  | RU C-<br>DE.A*30.B.01082 |
|-----|-----------------------------------------------------------------------------------|--------------------------|

|     |                                                                                   |                                                     |                   |
|-----|-----------------------------------------------------------------------------------|-----------------------------------------------------|-------------------|
| PRS |  | <a href="http://www.prs.pl/">http://www.prs.pl/</a> | TE/2104/880590/16 |
|-----|-----------------------------------------------------------------------------------|-----------------------------------------------------|-------------------|

|                  |                                                                                   |                                                                                                                                                       |
|------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| cULus Recognized |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> |
|------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|

|              |
|--------------|
| cULus Listed |
|--------------|

### Accessories

#### Accessories

#### Assembly adapter

#### Assembly adapters - UTA 107/30 - 2320089



Universal DIN rail adapter

#### Assembly adapters - UWA 182/52 - 2938235



Universal wall adapter for securely mounting the power supply in the event of strong vibrations. The power supply is screwed directly onto the mounting surface. The universal wall adapter is attached at the top/bottom.

## DC/DC converters - QUINT-PS/24DC/24DC/10 - 2320092

### Accessories

Assembly adapters - QUINT-PS-ADAPTERS7/1 - 2938196



Assembly adapter for QUINT-PS... power supply on S7-300 rail

---

### Power supply

Power supply unit - QUINT-PS/1AC/24DC/20 - 2866776



Primary-switched QUINT POWER power supply for DIN rail mounting with SFB (Selective Fuse Breaking) Technology, input: 1-phase, output: 24 V DC/20 A

---

Power supply unit - QUINT-PS/3AC/24DC/20 - 2866792



Primary-switched QUINT POWER power supply for DIN rail mounting with SFB (Selective Fuse Breaking) Technology, input: 3-phase, output: 24 V DC/20 A

---

### Redundancy module

Redundancy module, with protective coating - QUINT-ORING/24DC/2X20/1X40 - 2320186



Active QUINT redundancy module for DIN rail mounting with ACB (auto current balancing) technology and monitoring functions, input: 24 V DC, output: 24 V DC/2 x 20 A or 1 x 40 A, including mounted UTA 107/30 universal DIN rail adapter

---

### Thermomagnetic device circuit breakers

Thermomagnetic device circuit breaker - CB TM1 1A SFB P - 2800836



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic SFB, 1 PDT contact, plug for base element.



## DC/DC converters - QUINT-PS/24DC/24DC/10 - 2320092

### Accessories

Thermomagnetic device circuit breaker - CB TM1 2A SFB P - 2800837



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic SFB, 1 PDT contact, plug for base element.

---

Thermomagnetic device circuit breaker - CB TM1 3A SFB P - 2800838



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic SFB, 1 PDT contact, plug for base element.

---

Thermomagnetic device circuit breaker - CB TM1 4A SFB P - 2800839



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic SFB, 1 PDT contact, plug for base element.

---

Thermomagnetic device circuit breaker - CB TM1 5A SFB P - 2800840



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic SFB, 1 PDT contact, plug for base element.

---

Thermomagnetic device circuit breaker - CB TM1 12A SFB P - 2800844



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic SFB, 1 PDT contact, plug for base element.

---

## DC/DC converters - QUINT-PS/24DC/24DC/10 - 2320092

### Accessories

Thermomagnetic device circuit breaker - CB TM1 16A SFB P - 2800845



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic SFB, 1 PDT contact, plug for base element.