

DATA SHEET

RM10/I


**RM, RM/I, RM/ILP cores and
accessories**

Supersedes data of September 2004

2008 Sep 01

CORE SETS**Effective core parameters**

SYMBOL	PARAMETER	VALUE	UNIT
$\Sigma(l/A)$	core factor (C1)	0.462	mm^{-1}
V_e	effective volume	4310	mm^3
l_e	effective length	44.6	mm
A_e	effective area	96.6	mm^2
$A_{\min}$	minimum area	89.1	mm^2
m	mass of set	≈ 22	g

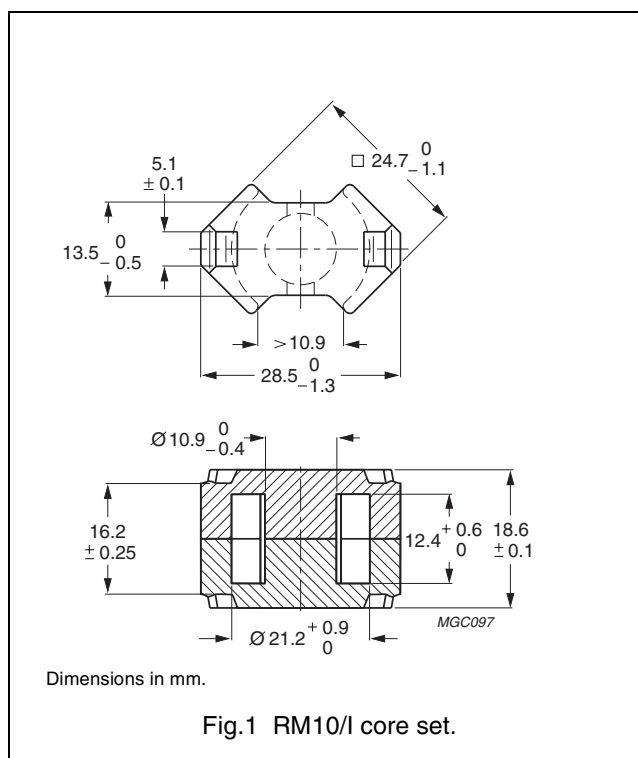**Core sets for filter applications**Clamping force for A_L measurements, 60 ± 20 N.

GRADE	A_L (nH)	μ_e	AIR GAP (μm)	TYPE NUMBER
3D3	$315 \pm 3\%$	≈ 116	≈ 380	RM10/I-3D3-A315
	$400 \pm 5\%$	≈ 147	≈ 280	RM10/I-3D3-A400
	$630 \pm 8\%$	≈ 232	≈ 140	RM10/I-3D3-A630
	$1900 \pm 25\%$	≈ 700	≈ 0	RM10/I-3D3
3H3	$400 \pm 3\%$	≈ 147	≈ 330	RM10/I-3H3-A400
	$630 \pm 3\%$	≈ 232	≈ 190	RM10/I-3H3-A630
	$1000 \pm 10\%$	≈ 367	≈ 110	RM10/I-3H3-A1000
	$4400 \pm 25\%$	≈ 1620	≈ 0	RM10/I-3H3

Core sets for general purpose transformers and power applicationsClamping force for A_L measurements, 60 ± 20 N.

GRADE	A_L (nH)	μ_e	TOTAL AIR GAP (μm)	TYPE NUMBER
3C81	$160 \pm 3\%$	≈ 59	≈ 980	RM10/I-3C81-E160
	$250 \pm 3\%$	≈ 92	≈ 570	RM10/I-3C81-A250
	$315 \pm 3\%$	≈ 116	≈ 430	RM10/I-3C81-A315
	$400 \pm 3\%$	≈ 147	≈ 330	RM10/I-3C81-A400
	$630 \pm 3\%$	≈ 232	≈ 190	RM10/I-3C81-A630
	$5500 \pm 25\%$	≈ 2020	≈ 0	RM10/I-3C81

RM, RM/I, RM/ILP cores and accessories

RM10/I

GRADE	A_L (nH)	μ_e	TOTAL AIR GAP (μm)	TYPE NUMBER
3C90	160 $\pm 3\%$	≈ 59	≈ 980	RM10/I-3C90-A160
	250 $\pm 3\%$	≈ 92	≈ 570	RM10/I-3C90-A250
	315 $\pm 3\%$	≈ 116	≈ 430	RM10/I-3C90-A315
	400 $\pm 3\%$	≈ 147	≈ 330	RM10/I-3C90-A400
	630 $\pm 3\%$	≈ 232	≈ 190	RM10/I-3C90-A630
	4500 $\pm 25\%$	≈ 1650	≈ 0	RM10/I-3C90
3C91 des	5500 $\pm 25\%$	≈ 2020	≈ 0	RM10/I-3C91
3C94	160 $\pm 3\%$	≈ 59	≈ 980	RM10/I-3C94-A160
	250 $\pm 3\%$	≈ 92	≈ 570	RM10/I-3C94-A250
	315 $\pm 3\%$	≈ 116	≈ 430	RM10/I-3C94-A315
	400 $\pm 3\%$	≈ 147	≈ 330	RM10/I-3C94-A400
	630 $\pm 3\%$	≈ 232	≈ 190	RM10/I-3C94-A630
	4500 $\pm 25\%$	≈ 1650	≈ 0	RM10/I-3C94
3C95 des	5500 $\pm 25\%$	≈ 2020	≈ 0	RM10/I-3C95
3C96 des	4050 $\pm 25\%$	≈ 1680	≈ 0	RM10/I-3C96
3F3	160 $\pm 3\%$	≈ 59	≈ 980	RM10/I-3F3-A160
	250 $\pm 3\%$	≈ 92	≈ 570	RM10/I-3F3-A250
	315 $\pm 3\%$	≈ 116	≈ 430	RM10/I-3F3-A315
	400 $\pm 3\%$	≈ 147	≈ 330	RM10/I-3F3-A400
	630 $\pm 3\%$	≈ 232	≈ 190	RM10/I-3F3-A630
	4050 $\pm 25\%$	≈ 1490	≈ 0	RM10/I-3F3
3F35 prot	3100 $\pm 25\%$	≈ 1190	≈ 0	RM10/I-3F35

Core sets of high permeability grades

Clamping force for AL measurements, 60 ± 20 N.

GRADE	A_L (nH)	μ_e	TYPE NUMBER
3E27	10700 $\pm 25\%$	≈ 3930	RM10/I-3E27
3E5	16000 $+40/-30\%$	≈ 5880	RM10/I-3E5

RM, RM/I, RM/ILP cores and accessories

RM10/I

Properties of core sets under power conditions

GRADE	B (mT) at	CORE LOSS (W) at				
	H = 250 A/m; f = 25 kHz; T = 100 °C	f = 25 kHz; B̂ = 200 mT; T = 100 °C	f = 100 kHz; B̂ = 100 mT; T = 100 °C	f = 100 kHz; B̂ = 200 mT; T = 25 °C	f = 100 kHz; B̂ = 200 mT; T = 100 °C	f = 400 kHz; B̂ = 50 mT; T = 100 °C
3C81	≥315	≤ 1.0	–	–	–	–
3C90	≥320	≤ 0.52	≤ 0.55	–	–	–
3C91	≥315	–	≤ 0.3 ⁽¹⁾	–	≤ 1.8 ⁽¹⁾	–
3C94	≥320	–	≤ 0.41	–	≤ 2.3	–
3C95	≥320	–	–	≤ 2.54	≤ 2.41	–
3C96	≥340	–	≤ 0.3	–	≤ 1.8	≤ 0.77
3F3	≥315	–	≤ 0.48	–	–	≤ 0.82
3F35	≥315	–	–	–	–	–

Properties of core sets under power conditions (continued)

GRADE	B (mT) at	CORE LOSS (W) at			
	H = 250 A/m; f = 25 kHz; T = 100 °C	f = 500 kHz; B̂ = 50 mT; T = 100 °C	f = 500 kHz; B̂ = 100 mT; T = 100 °C	f = 1 MHz; B̂ = 30 mT; T = 100 °C	f = 3 MHz; B̂ = 10 mT; T = 100 °C
3C96	≥340	≤ 1.5	–	–	–
3F3	≥315	–	–	–	–
3F35	≥315	≤ 0.6	≤ 4.5	–	–

Note

1. Measured at 60 °C.


RM, RM/I, RM/ILP cores and accessories

RM10/I

COIL FORMER

General data

PARAMETER	SPECIFICATION
Coil former material	polybutyleneterephthalate (PBT), glass-reinforced, flame retardant in accordance with UL 94V-0; UL file number E45329(R)
Pin material	copper-tin alloy (CuSn), tin (Sn) plated
Maximum operating temperature	155 °C, "IEC 60085", class F
Resistance to soldering heat	"IEC 60068-2-20", Part 2, Test Tb, method 1B, 350 °C, 3.5 s
Solderability	"IEC 60068-2-20", Part 2, Test Ta, method 1

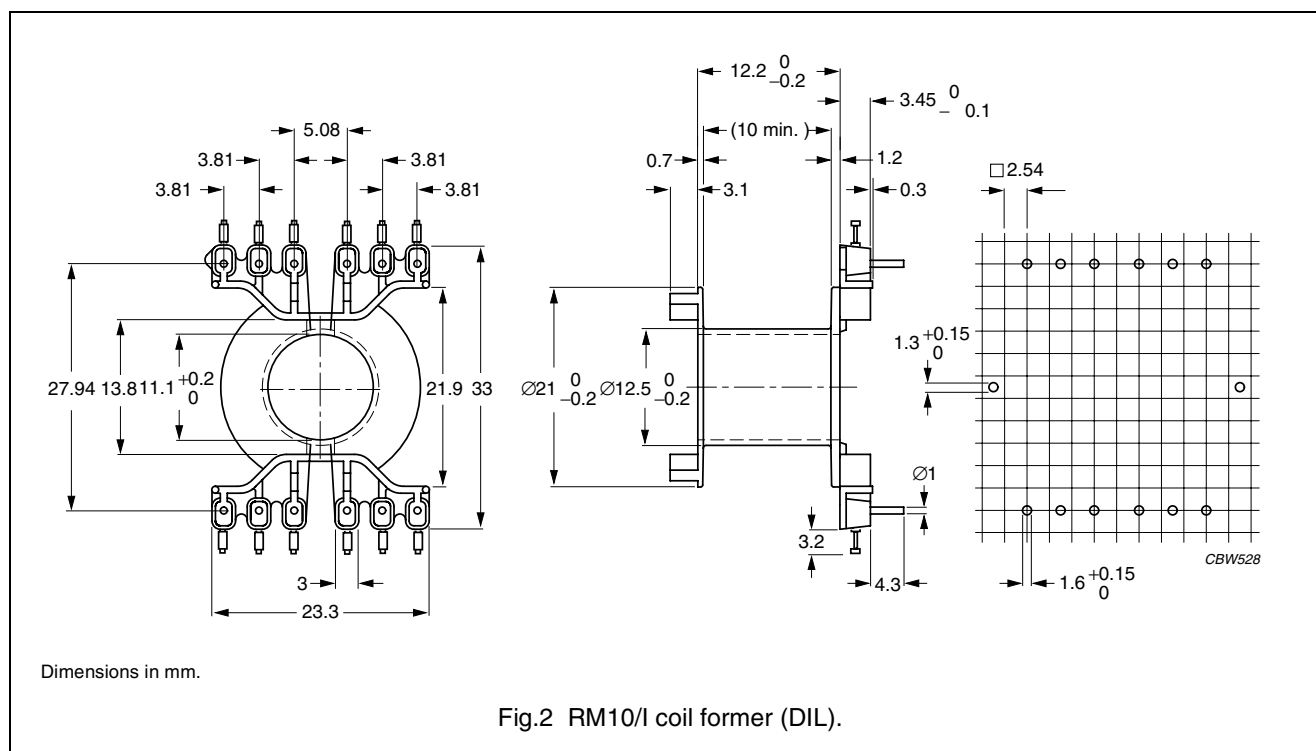

Winding data and area product for RM10 coil former (DIL)

NUMBER OF SECTIONS	AVERAGE LENGTH OF TURN (mm)	WINDING AREA (mm ²)	WINDING WIDTH (mm)	AREA PRODUCT Ae x Aw (mm ⁴)	TYPE NUMBER
1	52	44.2	10.0	4270	CPV-RM10-1S-12PD


RM, RM/I, RM/ILP cores and accessories

RM10/I

COIL FORMER

General data

PARAMETER	SPECIFICATION
Coil former material	polyester (UP), glass-reinforced, flame retardant in accordance with "UL 94V-0"; UL file number E61040(M)
Pin material	copper-tin alloy (CuSn), tin (Sn) plated
Maximum operating temperature	180 °C, "IEC 60085", class H
Resistance to soldering heat	"IEC 60068-2-20", Part 2, Test Tb, method 1B, 350 °C, 3.5 s
Solderability	"IEC 60068-2-20", Part 2, Test Ta, method 1

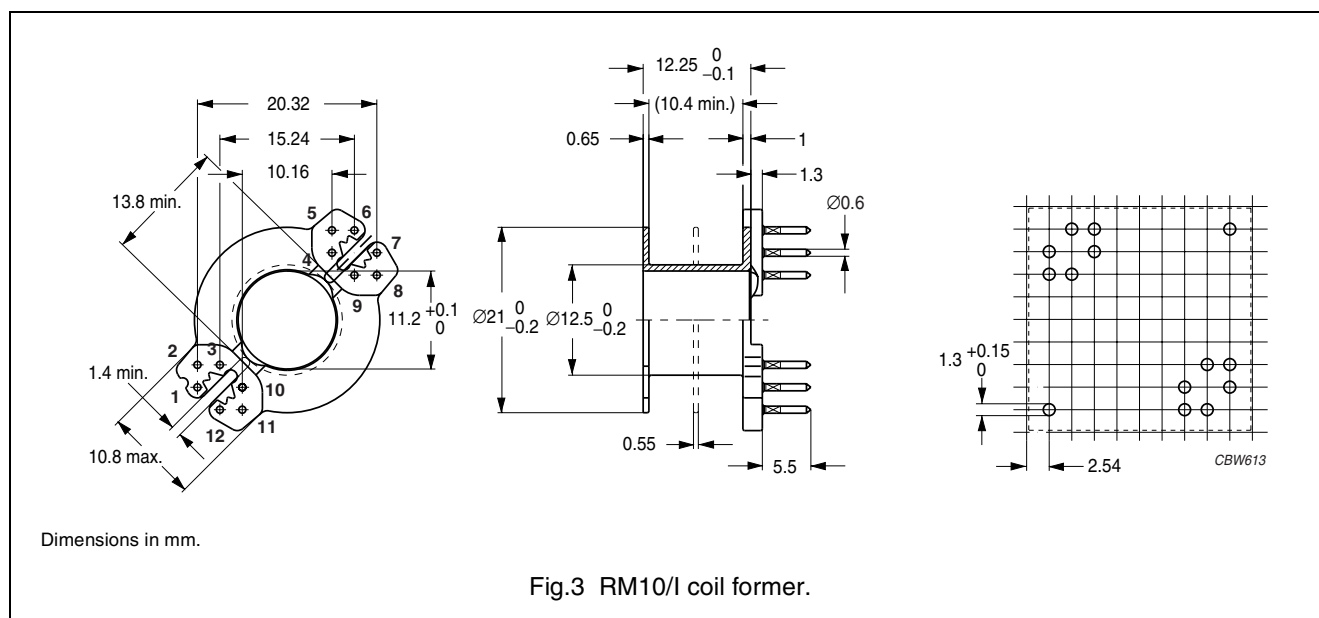

Winding data and area product for RM10/I coil former


NUMBER OF SECTIONS	NUMBER OF PINS	PIN POSITIONS USED	AVERAGE LENGTH OF TURN (mm)	WINDING AREA (mm ²)	WINDING WIDTH (mm)	AREA PRODUCT Ae x Aw (mm ⁴)	TYPE NUMBER
1	12	all	52.3	42.7	10.3	4120	CSV-RM10-1S-12P
1	5	3, 4, 6, 9, 10	52.3	42.7	10.3	4120	CSV-RM10-1S-5P
1	8	1,3,4,6,7,9, 10,12	52.3	42.7	10.3	4120	CSV-RM10-1S-8P
1	10	all exept 2, 11	52.3	42.7	10.3	4120	CSV-RM10-1S-10P
1	11	all exept 9	52.3	42.7	10.3	4120	CSV-RM10-1S-11P
2	8	1,3,4,6,7,9, 10,12	52.3	2 x 21.1	2 x 4.9	2 x 2040	CSV-RM10-2S-8P

NUMBER OF SECTIONS	NUMBER OF PINS	PIN POSITIONS USED	AVERAGE LENGTH OF TURN (mm)	WINDING AREA (mm ²)	WINDING WIDTH (mm)	AREA PRODUCT Ae x Aw (mm ⁴)	TYPE NUMBER
2	10	all except 2, 11	52.3	2 x 21.1	2 x 4.9	2 x 2040	CSV-RM10-2S-10P
2	12	all	52.3	2 x 21.1	2 x 4.9	2 x 2040	CSV-RM10-2S-12P
2	5	3, 4, 6, 9, 10	52.3	2 x 21.1	2 x 4.9	2 x 2040	CSV-RM10-2S-5P

MOUNTING PARTS

General data

ITEM	SPECIFICATION
Clamping force	≈30 N
Clip material	stainless steel
Clip plating	tin (Sn)
Solderability	"IEC 60068-2-20", Part 2, Test Ta, method 1
Type number	CLI/P-RM10/I

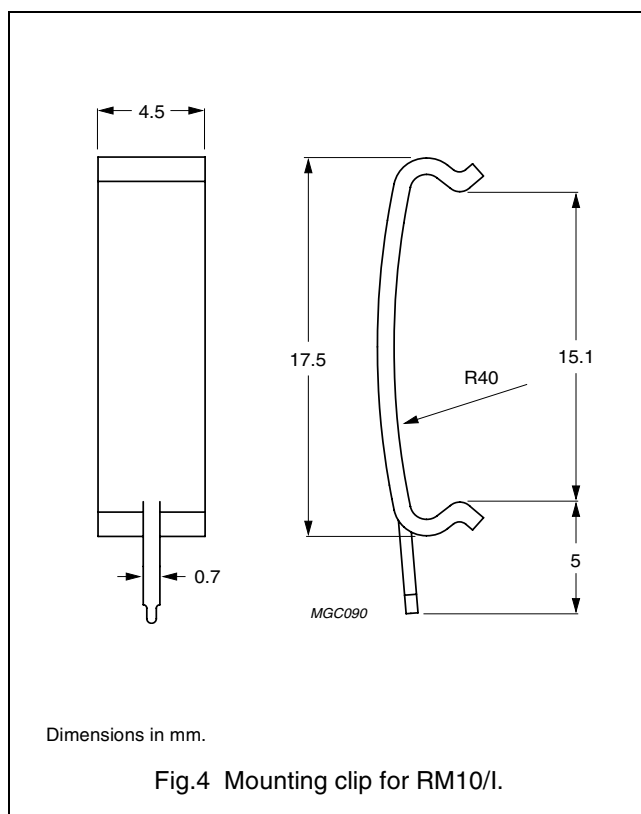

RM, RM/I, RM/ILP cores and accessories

RM10/I

DATA SHEET STATUS DEFINITIONS

DATA SHEET STATUS	PRODUCT STATUS	DEFINITIONS
Preliminary specification	Development	This data sheet contains preliminary data. Ferroxcube reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.
Product specification	Production	This data sheet contains final specifications. Ferroxcube reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.

DISCLAIMER

Life support applications — These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Ferroxcube customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Ferroxcube for any damages resulting from such application.

PRODUCT STATUS DEFINITIONS

STATUS	INDICATION	DEFINITION
Prototype		These are products that have been made as development samples for the purposes of technical evaluation only. The data for these types is provisional and is subject to change.
Design-in		These products are recommended for new designs.
Preferred		These products are recommended for use in current designs and are available via our sales channels.
Support		These products are not recommended for new designs and may not be available through all of our sales channels. Customers are advised to check for availability.