

0.2 – 6 mm²
800 V/8 kV/3 ①
41 A

AWG 24 – 10
600 V, 30 A ②
600 V, 40 A ③

Terminal block width 8 mm / 0.315 in
12 – 13 mm / 0.49 in

* ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭ ⑮ ⑯ ⑰ ⑱ ⑲ ⑳ ㉑ ㉒ ㉓ ㉔ ㉕ ㉖ ㉗ ㉘ ㉙ ㉚ ㉛ ㉜ ㉝ ㉞ ㉟ ㊱ ㊲ ㊳ ㊴ ㊵ ㊶ ㊷ ㊸ ㊹ ㊺ ㊻ ㊼ ㊽ ㊾ ㊿

0.2 – 10 mm²
800 V/8 kV/3 ①
57 A

AWG 24 – 8
600 V, 50 A ②
600 V, 54 A ③

Terminal block width 10 mm / 0.394 in
12 – 13 mm / 0.49 in




* ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭ ⑮ ⑯ ⑰ ⑱ ⑲ ⑳ ㉑ ㉒ ㉓ ㉔ ㉕ ㉖ ㉗ ㉘ ㉙ ㉚ ㉛ ㉜ ㉝ ㉞ ㉟ ㊱ ㊲ ㊳ ㊴ ㊵ ㊶ ㊷ ㊸ ㊹ ㊺ ㊻ ㊼ ㊽ ㊾ ㊿

0.2 – 10 mm²
800 V/8 kV/3 ①
57 A


AWG 24 – 8
600 V, 50 A ②
600 V, 54 A ③

Terminal block width 10 mm / 0.394 in
12 – 13 mm / 0.49 in

* ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭ ⑮ ⑯ ⑰ ⑱ ⑲ ⑳ ㉑ ㉒ ㉓ ㉔ ㉕ ㉖ ㉗ ㉘ ㉙ ㉚ ㉛ ㉜ ㉝ ㉞ ㉟ ㊱ ㊲ ㊳ ㊴ ㊵ ㊶ ㊷ ㊸ ㊹ ㊺ ㊻ ㊼ ㊽ ㊾ ㊿

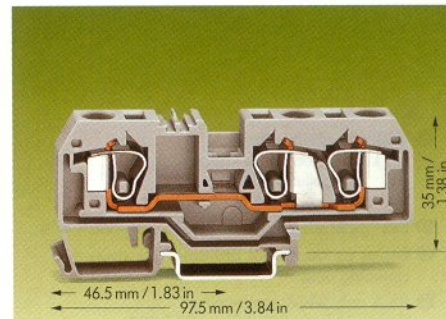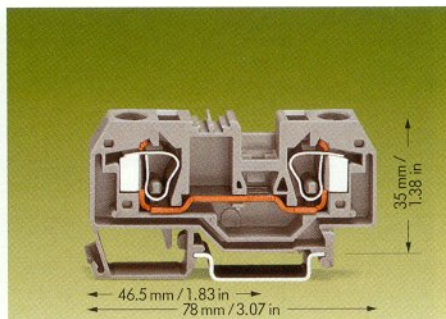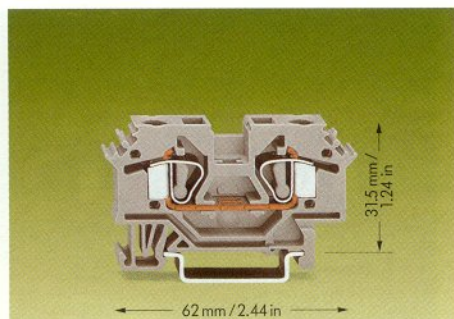

Item-No.	Pack.-unit pcs	Item-No.	Pack.-unit pcs	Item-No.	Pack.-unit pcs
2-conductor through terminal blocks		2-conductor through terminal blocks		3-conductor through terminal blocks	
grey 282-601	50	grey 284-901	25	grey 284-681	25
blue 282-604 ①	50	blue 284-904	25	blue 284-684	25
		orange 284-902	25	orange 284-682	25
gr. (earth) cond. 282-607	page 1.63	gr. (earth) cond. 284-907	page 1.63	gr. (earth) cond. 284-687	page 1.63
Appropriate marking system WMB/WSB/WFB		Appropriate marking system WMB/WSB/WFB		Appropriate marking system WMB/WSB/WFB	
orange grey		orange grey		orange grey	
4 mm / 0.157 in thick 282-317 282-316	100 (4 x 25)	2.5 mm / 0.098 in thick 284-328 284-325	100 (4 x 25)	2.5 mm / 0.098 in thick 284-339 284-308	100 (4 x 25)
2 mm / 0.079 in thick 282-327 282-337	100 (4 x 25)	2 mm / 0.079 in thick 284-329 284-326	100 (4 x 25)	2 mm / 0.079 in thick 284-340 284-309	100 (4 x 25)
6 mm / 0.236 in wide 249-116	100 (4 x 25)	6 mm / 0.236 in wide 249-116	100 (4 x 25)	6 mm / 0.236 in wide 249-116	100 (4 x 25)
10 mm / 0.394 in wide 249-117	50 (2 x 25)	10 mm / 0.394 in wide 249-117	50 (2 x 25)	10 mm / 0.394 in wide 249-117	50 (2 x 25)
I _N 41 A		I _N 57 A		I _N 57 A	
grey 282-402	100 (4 x 25)	grey 284-402	100 (4 x 25)	grey 284-402	100 (4 x 25)
yellow-green 282-422	100 (4 x 25)	yellow-green 284-422	100 (4 x 25)	yellow-green 284-422	100 (4 x 25)
I _N 41 A		I _N 57 A		I _N 57 A	
grey 282-409	100 (4 x 25)	grey 284-409	50 (2 x 25)	grey 284-409	50 (2 x 25)
8 mm / 0.315 in wide		8 mm / 0.315 in wide		8 mm / 0.315 in wide	
209-170	50 (2 x 25)	209-170	50 (2 x 25)	209-170	50 (2 x 25)
for test plug 4 mm / 0.157 in Ø		for test plug 4 mm / 0.157 in Ø		for test plug 4 mm / 0.157 in Ø	
yellow 282-415	100 (4 x 25)	yellow 284-415	50 (2 x 25)	yellow 284-415	50 (2 x 25)
I _N 15 A 284-414	50 (2 x 25)	I _N 15 A 284-414	50 (2 x 25)	I _N 15 A 284-414	50 (2 x 25)
I _N 30 A 284-413	50 (2 x 25)	I _N 30 A 284-413	50 (2 x 25)	I _N 30 A 284-413	50 (2 x 25)
orange grey		1 mm / 0.039 in thick		1 mm / 0.039 in thick	
1 mm / 0.039 in thick 284-344 284-334	25	grey 284-357	25	grey 284-358	25
1 mm / 0.039 in thick 284-346 284-336	25	orange 284-367	25	orange 284-368	25
		yellow 284-400	100 (4 x 25)	yellow 284-400	100 (4 x 25)

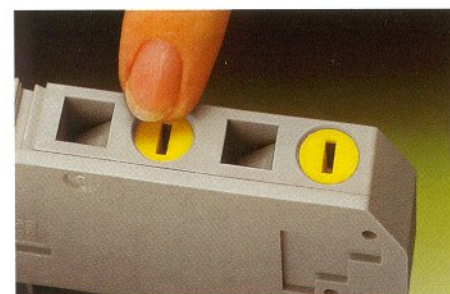

Finger guard cover snapped into unused clamping unit.