
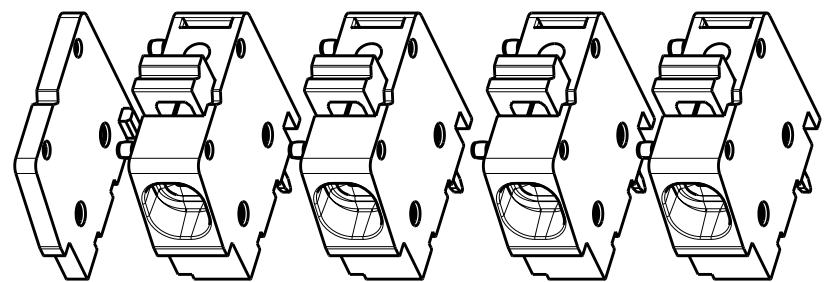
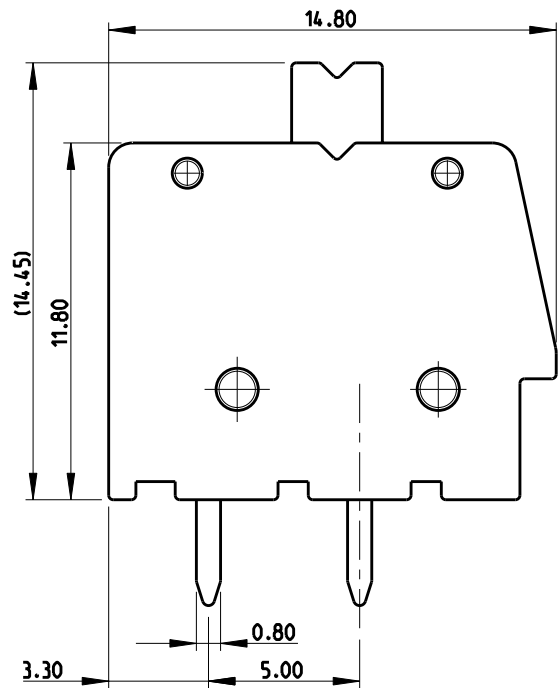



LOC		DIST		REVISIONS					
FT		0		P	LTR	DESCRIPTION	DATE	DWN	APVD
					A	REVISED PER ECO-12-002880	14FEB12	KH	MS

D

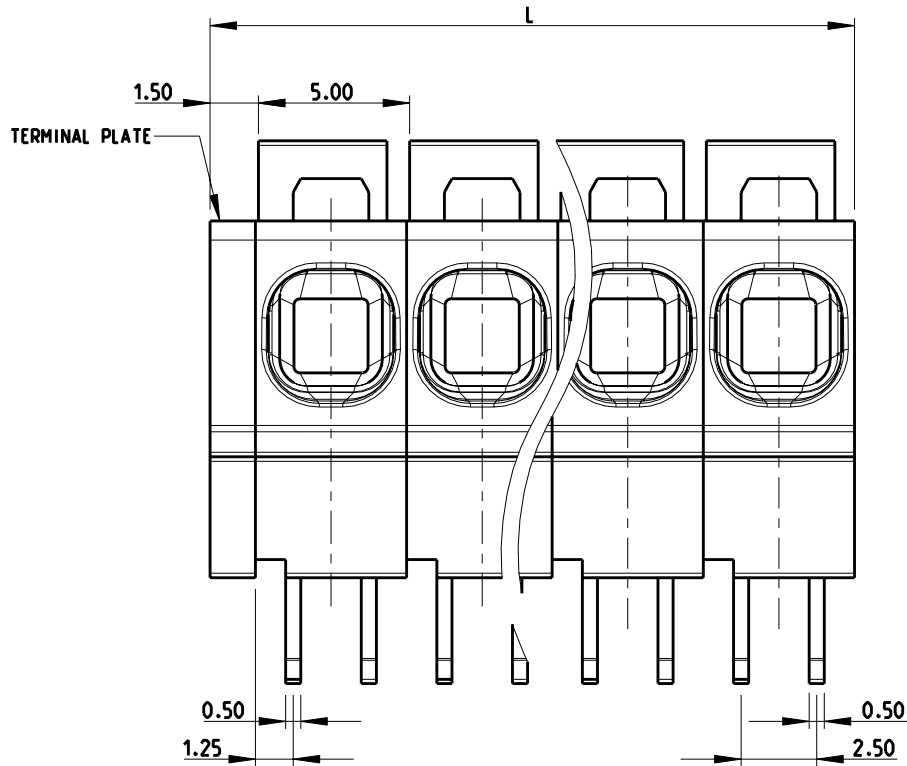

SCALE 2:1
-4 AS SHOWN

C

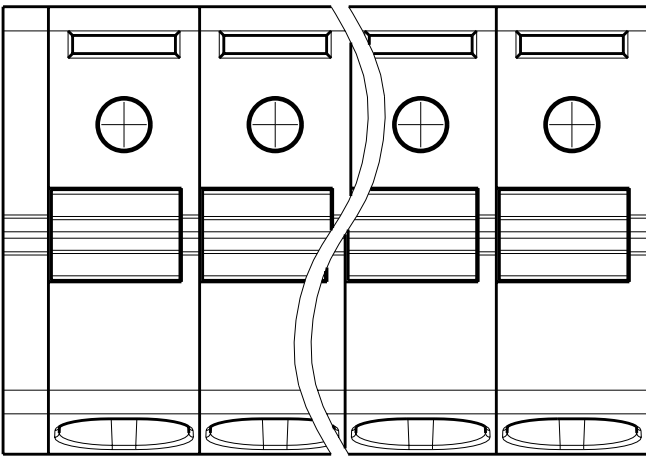

MATERIALS:
HOUSING - POLYAMIDE, COLOR - GREEN
CLAMPING SPRING - STEEL
PIN - COPPER ALLOY - TIN PLATED

MECHANICAL
PCB THICKNESS - 2.40 MAX
PCB HOLE DIAMETER - 1.20 MIN
STRIP LENGTH - 10-11 MM
OPERATING TEMPERATURE - -40°C TO +110°C


ELECTRICAL
WIRE RANGE- 30 TO 12 AWG
VOLTAGE RATING- 300 VOLTS
CURRENT RATING-16 AMP
CONTACT RESISTANCE-15 MILLOHM MAX
INSULATION RESISTANCE-10⁹ OHMS MIN (500V DC)

126.50	25	2-1986711-5
121.50	24	2-1986711-4
116.50	23	2-1986711-3
111.50	22	2-1986711-2
106.50	21	2-1986711-1
101.50	20	2-1986711-0
96.50	19	1-1986711-9
91.50	18	1-1986711-8
86.50	17	1-1986711-7
81.50	16	1-1986711-6
76.50	15	1-1986711-5
71.50	14	1-1986711-4
66.50	13	1-1986711-3
61.50	12	1-1986711-2
56.50	11	1-1986711-1
51.50	10	1-1986711-0
46.50	9	1986711-9
41.50	8	1986711-8
36.50	7	1986711-7
31.50	6	1986711-6
26.50	5	1986711-5
21.50	4	1986711-4
16.50	3	1986711-3
11.50	2	1986711-2
"L"	POLE	PART NO

B

B

PCB LAYOUT

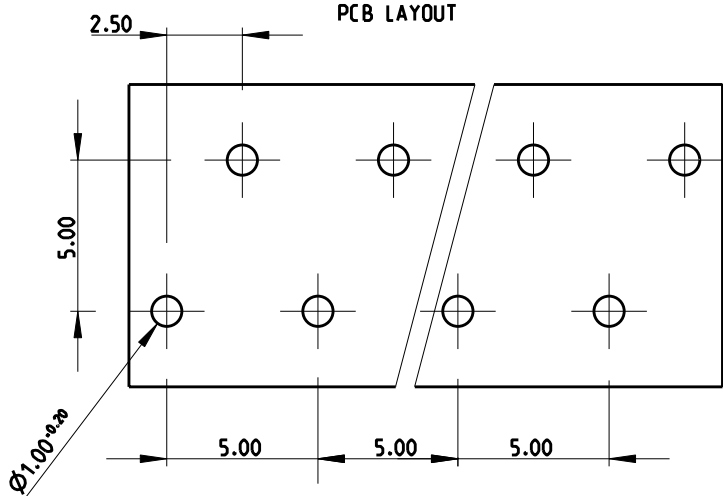

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

0 PLC
1 PLC
2 PLC
3 PLC
4 PLC
ANGLES

±0.5
±0.25
±1°

MATERIAL
-

FINISH
-

DWN
RAGHAVENDRA
CHK
SARVER MICHAEL
APVD
SARVER MICHAEL

08AUG2011
08AUG2011
08AUG2011

PRODUCT SPEC
-

APPLICATION SPEC
-

WEIGHT
-

TE Connectivity

NAME
SPRING TYPE, SIDE WIRE ENTRY
TERMINAL BLOCK SIDE STACKABLE
STRAIGHT 02 - 25 POLES PITCH 5.00mm

SIZE
A3

CAGE CODE
00779

DRAWING NO
C=1986711

RESTRICTED TO
-

CUSTOMER DRAWING

SCALE
4:1

SHEET
1

OF
1

REV
A

A