


Terminal blocks - strip type

SERIES 323

10A terminal blocks - standard & raised base

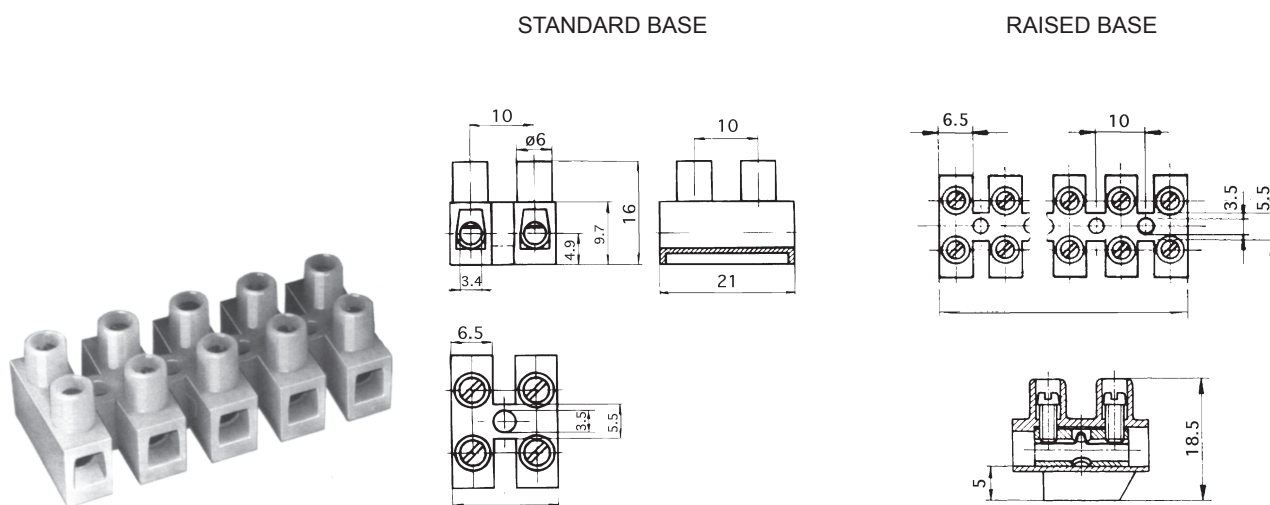

Length = number of poles x 10 less 2mm

FEATURES

Series 323 terminal blocks are available in standard height profile, suffixed WE (HDS) and in raised base profile, suffixed FU (HDS). The raised base versions are particularly suitable to obtain required minimum creepage and clearance distances when mounting on non-insulating surfaces. They are available with or without wire protectors, with captive screws fitted as standard.

Approvals				
Nominal Cross-Section mm ²	20-10 AWG 30A	26-10 AWG 25A	26-10 AWG 10A	2.5
Voltage Rating V	300	300	300	400
Application Group	B, D	B	D, E	

TECHNICAL DETAILS

Mouldings:	nylon 6.6, natural, UL94 V2
Inserts:	brass, tinned
Screws:	M3 steel, zinc plated, blue passivated
Screw tightening torque:	max: 0.51 Nm
Temp. limits:	max short term: 140° C continuous: 105° C
Current rating:	26A
Voltage rating:	400v to VDE 0110 pollution group 2
Conductor size:	2.5mm ²
Wire stripping length:	6.5mm

OPTIONS

Marking: special printing available. Please provide sketch.

Cut lengths: standard 12 pole lengths can be cut to shorter lengths.

Covers & base plates: see page 58.

