

# ATOF® Blade Fuses


Rated 32V



## Specifications

<b>Voltage Rating:</b>	32 VDC
<b>Interrupting Rating:</b>	1000A @ 32 VDC
<b>*Recommended Environmental Temperature:</b>	-40°C to +125°C
<b>Terminals Material:</b>	ATOF® (Tin Plated) / ATO Ag (Silver Plated)
<b>Housing Material:</b>	PA66 (U.L. 94 Flammability rating – V2)
<b>Net Weight Per Fuse:</b>	1.4±5% gr
<b>Complies with:</b>	SAE J1284,ISO 8820-3
<b>UL Listed:</b>	File AU1410
<b>CSA Certified:</b>	File No. 29862

\*Tin plating's temperature limit is =130°C, Silver plating allows up to 150°C at the terminal interface.

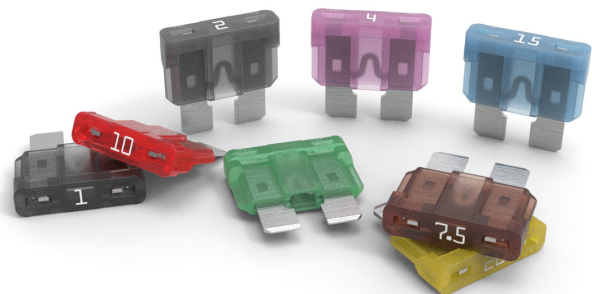

## Description

ATOF® automotive blade fuses replaced obsolete ATO Series 257 fuses. Automakers in the United States and around the world consider ATOF® fuses standard equipment for protecting low-voltage circuits.

## Applications

- Cars
- Trucks
- SUVs
- Offroad vehicles
- Buses
- Watercraft as approved by Littelfuse®

## Features & Benefits

- Color coding shows the amperage rating for each fuse
- See-through housing makes it easy to check whether a fuse has blown
- Checkpoints on top make it possible to measure resistance without removing the fuse
- High-contrast amperage stamp on the top of the housing aids identification
- Simple to install and remove

## Ordering Information

Part Number	Rating	Package Size
ATOF® (Tin Plated)		
0287xxx.PXCN	1 - 40	2000
0287xxx.U	1 - 40	500
0287xxx.H	1 - 40	100
0287xxx.L	1 - 40	50
ATO Ag (Silver Plated)		
0287xxx.PXS	1 - 40	2000

# ATOF® Blade Fuses

Rated 32V


## Ratings

Part Number	Current Rating (A)	Housing Material Color	Test Cable Size (mm <sup>2</sup> )	Typ. Voltage Drop (mV)	Typ. Cold Resistance (mΩ)	Typ. I <sup>2</sup> t (A <sup>2</sup> s)
0287001_	1	Black	0.35	176	123	0.4
0287002_	2	Grey	0.35	141	53.5	1.4
0287003_	3	Purple	0.35	137	31.1	7.4
0287004_	4	Pink	0.35	136	22.8	14
0287005_	5	Brown	0.5	128	17.85	26
028707.5_	7.5	Dark Brown	0.75	116	10.91	60
0287010_	10	Red	1	109	7.70	115
0287015_	15	Blue	1.5	102	4.80	340
0287020_	20	Yellow	2.5	98	3.38	520
0287025_	25	Light Orange	2.5	92	2.52	1,000
0287030_	30	Green	4	84	1.97	1,500
0287035_	35	Dark Green	6	87	1.61	2,300
0287040_	40	Orange	6	96	1.44	3,300

The typical I<sup>2</sup>t is an average value calculated from the breaking capacity tests by using the melting time before the arcing occurs.

## Dimensions


Dimensions in mm for reference only.  
See outline drawing for dimensions and tolerances.

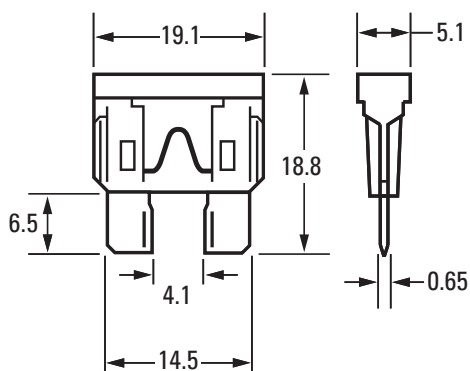

# ATOF® Blade Fuses

## Rated 32V

### Time-Current Characteristic Curves

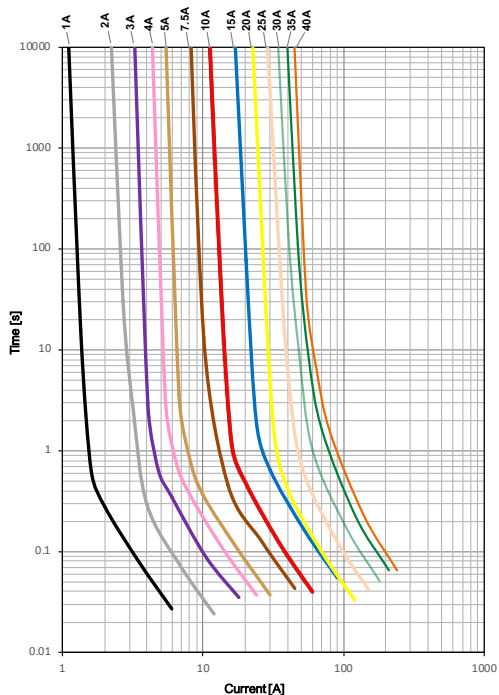


### Time-Current Characteristics

% of Rating	Current Rating	Opening Time Min / Max (s)
100	35A & 40A	360,000 / ∞
110	1A-30A	360,000 / ∞
135	1A & 2A 3A-40A	0.35 / 600 0.750 / 600
160	1A-40A	0.250 / 50
200	1A & 2A 3A-40A	0.1 / 5 0.15 / 5
350	1A & 2A 3A-40A	0.02 / 0.5 0.08 / 0.5
600	1A-30A 35A & 40A	0.1 max 0.15 max

### Typical Derating of Fuse Melting Element

Temperature Security Margin is 20%  
 Wire Cross Section And Fixture Test Set Up Refer To ISO 8820-3  
 Please Contact Littelfuse® For Details Regarding Derating Test Set Up

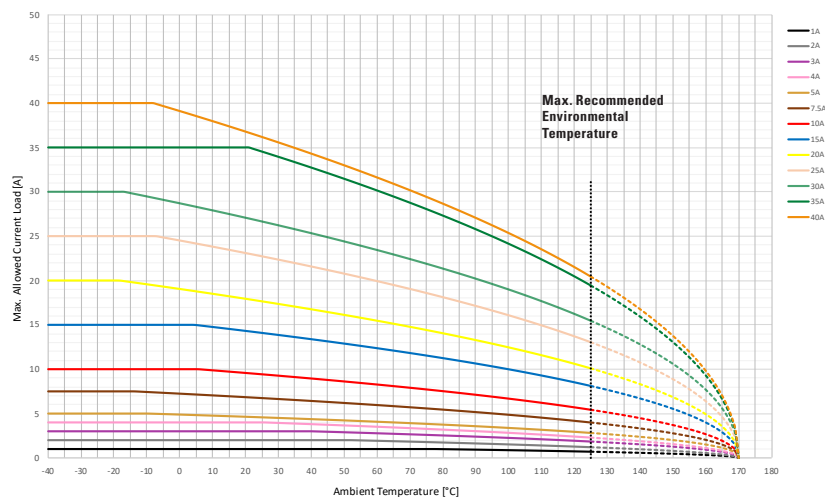

### Temperature Table

	max. allowed current load [A] at ambient temperature (typical derating)						
	-40°C	0°C	20°C	65°C	85°C	110°C	125°C
<b>1A</b>	1	1	1	1	1	1	1
<b>2A</b>	2	2	2	2	2	1	1
<b>3A</b>	3	3	3	3	2	2	2
<b>4A</b>	4	4	4	3	3	3	2
<b>5A</b>	5	5	5	4	4	3	3
<b>7.5A</b>	8	7	7	6	5	5	4
<b>10A</b>	10	10	10	8	7	6	5
<b>15A</b>	15	15	14	12	11	9	8
<b>20A</b>	20	19	18	15	14	12	10
<b>25A</b>	25	25	23	19	18	15	13
<b>30A</b>	30	29	27	23	21	18	15
<b>35A</b>	35	35	35	29	27	22	19
<b>40A</b>	40	39	37	31	28	24	20

Derating curves may change depending on the final condition of the application (terminals characteristics, wire size etc.). Please ask Littelfuse® for more information.