



- ErP<sup>1</sup>, CEC<sup>2</sup> and EISA<sup>3</sup> Compliant Models
- Wide Range AC Input
- Medical Certifications

## Key Market Segments & Applications

Medical, Industrial Computing,  
Life Sciences / Laboratory

# DTM110-C Series

90W to 110W Medical AC-DC External Power Supplies

## DTM110-C Features and Benefits

### Features

- CEC and EISA Compliant
- Wide Range AC Input
- 87% Average Efficiency

### Benefits

- Easier system compliance
- Global Operation
- Consumes less energy


## Specifications

MODELS		DTM110PWxxx-C
ITEMS		
Input Voltage range	VAC	90 - 264VAC (47 - 63Hz)
Inrush Current	A	100A at 230VAC input, 25°C ambient cold start
Input Current	A	2A at 90VAC, Full Load
Power Factor	-	Meets EN61000-3-2. >0.9 PF
Leakage Current (264VAC 60Hz)	µA	Typically 300µA
Hold Up Time (Typ)	ms	>10ms
Temperature Coefficient	%/°C	±0.05%/°C
Voltage Accuracy	%	±1%
Adjustment Range	V	None
Minimum Load	A	None
Total Regulation	%	12V to 15V Models: ±5%, >15V models ±3%
Ripple & Noise	%	1%
Short Circuit Protection	-	<160% - hiccup mode
Overvoltage Protection	V	110 - 150% of nominal (Cycle input power to reset)
Average Efficiency	%	87%
Operating Temperature	°C	0 to +40°C
Storage Temperature	°C	-10 to +70°C
Humidity (non condensing)	%RH	10 - 90%RH
Cooling	-	Convection
Withstand Voltage	VAC	Input to Ground 1.5kVAC, Input to Output 4kVAC
Vibration (non operating)	-	23.52m/s <sup>2</sup> (10 - 55Hz: constant sweep 1 min X, Y, Z for 1 hour)
Shock	-	< 196.1 m/s <sup>2</sup> (20G)
Safety Agency Approvals	-	CE, UL60601-1, EN60601-1, IEC60601-1
Safety Class	-	Class I
Altitude	m	3000m
Offload Power Consumption	W	< 0.5W
Conducted & Radiated EMI	-	EN60601-1-2, FCC Part 18 Class B
Immunity	-	EN55011
Weight (Typ)	g	605g
Size (WxLxH)	mm	170 x 64.8 x 38.5
Cable Length	mm	1050mm
AC Input Connector	-	IEC 320-C14 (Accepts IEC 320-C13)
Output Connector	-	Kycon KPPx-4P or equivalent Pins 1 & 2: -Vout, Pins 3 & 4: +Vout
Warranty	yrs	3

Notes: (1) ErP - Energy Related Products (2) Californian Energy Commission (3) EISA - Energy Independence and Security Act of 2007


Model Selector						
Model	Output (V)	Maximum Output (A)	Maximum Power (W)	ErP	CEC	EISA Efficiency Level
DTM110PW120C	12	7.5	90	Step 2	V	V
DTM110PW135C	13.5	6.67	90	Step 2	V	V
DTM110PW150C	15	6.67	100	Step 2	V	V
DTM110PW190C	19	5.8	110	Step 2	V	V
DTM110PW200C	20	5.5	110	Step 2	V	V
DTM110PW240C	24	4.6	110	Step 2	V	V

**Outline Drawing DTM110-C Series**

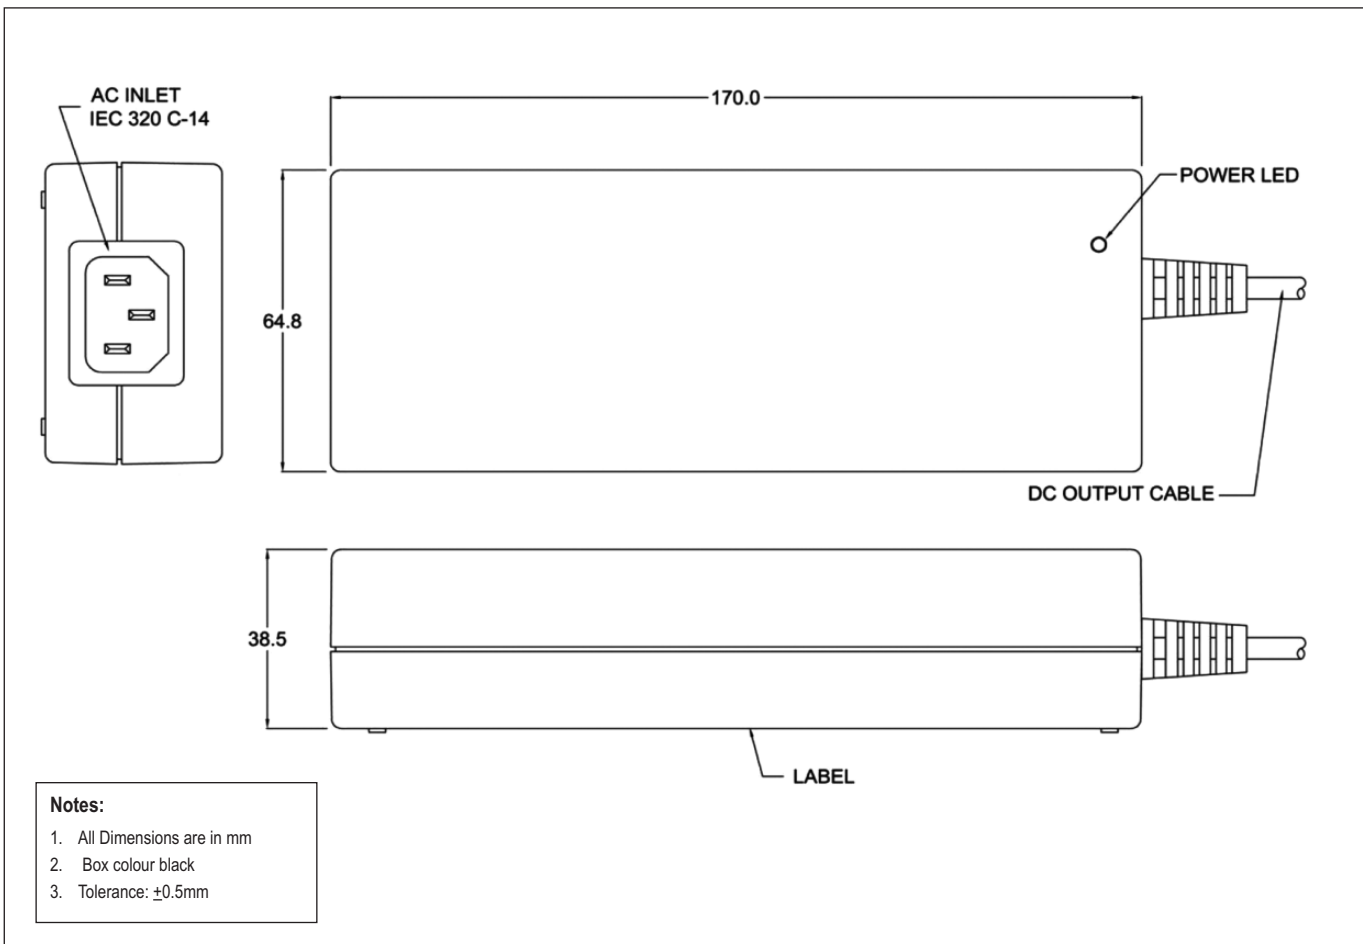

Other External AC-DC Products - **DTM65-C, DTM65-C8, DTM165**

## DTM110-C Output Connector

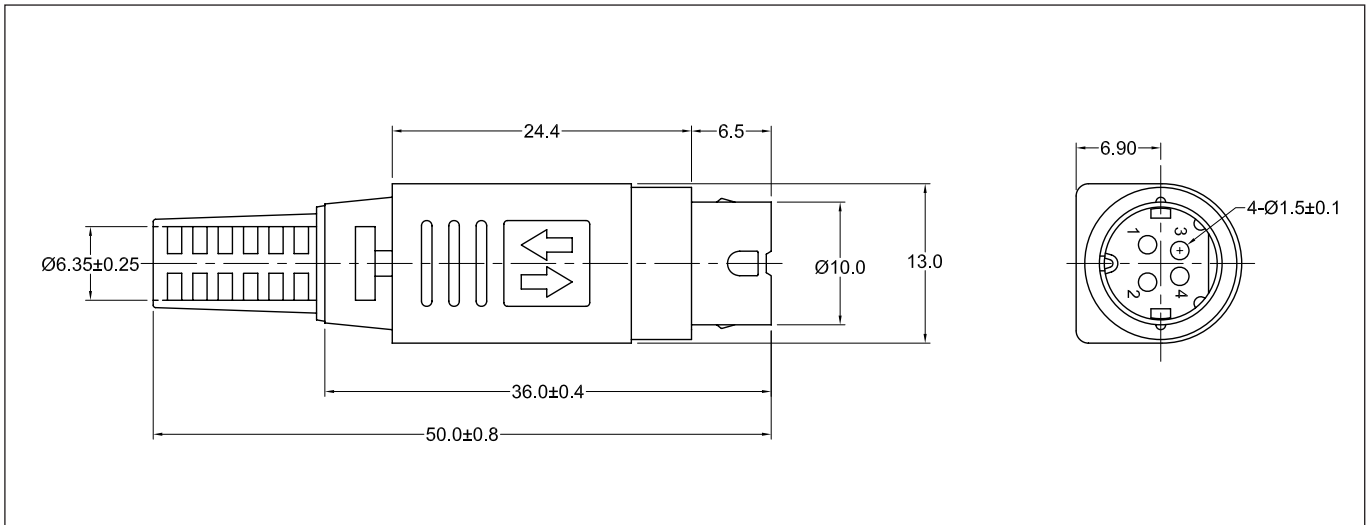

### Pinout DTM110-C Model

Pin	Function
1	- Vout
2	- Vout
3	+ Vout
4	+ Vout

Alternative output connectors are available  
Please contact Sales for further information (min quantities apply)



**TDK-Lambda France SAS**

3 Avenue du Canada  
 Parc Technopolis  
 Bâtiment Sigma  
 91940 les Ulis  
 France  
 Tel: +33 1 60 12 71 65  
 Fax: +33 1 60 12 71 66  
[france@fr.tdk-lambda.com](mailto:france@fr.tdk-lambda.com)  
[www.emea.lambda.tdk.com/fr](http://www.emea.lambda.tdk.com/fr)



**Italy Sales Office**

Via Giacomo Matteotti 62  
 20092 Cinisello Balsamo (MI)  
 Italy  
 Tel: +39 02 61 29 38 63  
 Fax: +39 02 61 29 09 00  
[info.italia@it.tdk-lambda.com](mailto:info.italia@it.tdk-lambda.com)  
[www.emea.lambda.tdk.com/it](http://www.emea.lambda.tdk.com/it)



**Netherlands**

[info@nl.tdk-lambda.com](mailto:info@nl.tdk-lambda.com)  
[www.emea.lambda.tdk.com/nl](http://www.emea.lambda.tdk.com/nl)



**TDK-Lambda Germany GmbH**

Karl-Bold-Strasse 40  
 77855 Achern  
 Germany  
 Tel: +49 7841 666 0  
 Fax: +49 7841 5000  
[info.germany@de.tdk-lambda.com](mailto:info.germany@de.tdk-lambda.com)  
[www.emea.lambda.tdk.com/de](http://www.emea.lambda.tdk.com/de)



**Austria Sales Office**

Aredstrasse 22  
 2544 Leobersdorf  
 Austria  
 Tel: +43 2256 655 84  
 Fax: +43 2256 645 12  
[info@at.tdk-lambda.com](mailto:info@at.tdk-lambda.com)  
[www.emea.lambda.tdk.com/at](http://www.emea.lambda.tdk.com/at)



**Switzerland Sales Office**

Eichtalstrasse 55  
 8634 Hombrechtikon  
 Switzerland  
 Tel: +41 44 850 53 53  
 Fax: +41 44 850 53 50  
[info@ch.tdk-lambda.com](mailto:info@ch.tdk-lambda.com)  
[www.emea.lambda.tdk.com/ch](http://www.emea.lambda.tdk.com/ch)



**Nordic Sales Office**

Haderslevvej 36B  
 DK-6000 Kolding  
 Denmark  
 Tel: +45 8853 8086  
[info@dk.tdk-lambda.com](mailto:info@dk.tdk-lambda.com)  
[www.emea.lambda.tdk.com/dk](http://www.emea.lambda.tdk.com/dk)



**TDK-Lambda UK Ltd.**

Kingsley Avenue  
 Ilfracombe  
 Devon EX34 8ES  
 United Kingdom  
 Tel: +44 (0) 12 71 85 66 66  
 Fax: +44 (0) 12 71 86 48 94  
[info@uk.tdk-lambda.com](mailto:info@uk.tdk-lambda.com)  
[www.emea.lambda.tdk.com/uk](http://www.emea.lambda.tdk.com/uk)



**TDK-Lambda Ltd.**

1 Alexander Yanai  
 Segula  
 Petah-Tikva  
 Israel  
 Tel: +9 723 902 4333  
 Fax: +9 723 902 4777  
[info@tdk-lambda.co.il](mailto:info@tdk-lambda.co.il)  
[www.emea.lambda.tdk.com/il](http://www.emea.lambda.tdk.com/il)



**C.I.S.**

**Commercial Support:**  
 Tel: +7 (495) 665 2627  
**Technical Support:**  
 Tel: +7 (812) 658 0463  
[info@tdk-lambda.ru](mailto:info@tdk-lambda.ru)  
[www.emea.lambda.tdk.com/ru](http://www.emea.lambda.tdk.com/ru)

**Local Distribution**

