


AC Current transducer AK-C420L

$$I_{PN} = 2 \dots 200 \text{ A}$$

Transducer for the electronic measurement AC sinusoidal waveforms current, with galvanic isolation between the primary (High power) and the secondary circuits (Electronic circuit). Jumper selectable ranges and 4-20mA current output.



Electrical data

Primary Nominal Current I_{PN} (A.t.RMS)	Analogue Output Signal ¹⁾ I_{OUT} (mA)	Type	RoHS Date Code
2, 5	4-20	AK 5 C420L	MAY 2006
10, 20, 50	4-20	AK 50 C420L	MAY 2006
100, 150, 200	4-20	AK 200 C420L	planned
V_c Supply voltage (Loop powered)	24	V DC	
R_L Load resistance	see power supply diagram		
V_b Rated voltage (CAT III, PD2)	150	V AC	
V_d RMS Isolation voltage test, 50 Hz, 1mn	3	kV AC	
f Frequency bandwidth	20-100	Hz	

Features

- AC sinusoidal Measurement
- Average responding
- Current output
- Loop powered transducers
- Panel mounting
- Accurate
- Jumper selectable ranges

Advantages

- Large aperture
- High isolation between primary and secondary circuits
- Easy to mount

Accuracy - Dynamic performance data

X	Accuracy @ I_{PN} , $T_A=25^\circ\text{C}$	± 1	%
t_r	Response time @ 90% of I_{PN}	< 300	ms

General data

T_A	Ambient operating temperature (0-95% RH)	-20...+50	$^\circ\text{C}$
T_S	Ambient storage temperature	-20...+85	$^\circ\text{C}$
m	Mass	120	g
	Safety	IEC 61010-1	
	EMC	EN 61326	

Note: ¹⁾ For 4-20mA output model, no saturation output up to 25 mA.

Applications


- Automation systems
Analog current reading for remote monitoring (e.g. motor).
- Data loggers
Self-powered transducer does not drain data logger batteries.
- Panel meters
Simple connection displays power consumption.

Options on request

- DIN mounting

Dimensions AK-C420L

(unit : mm, 1mm = 0.0394 inch)

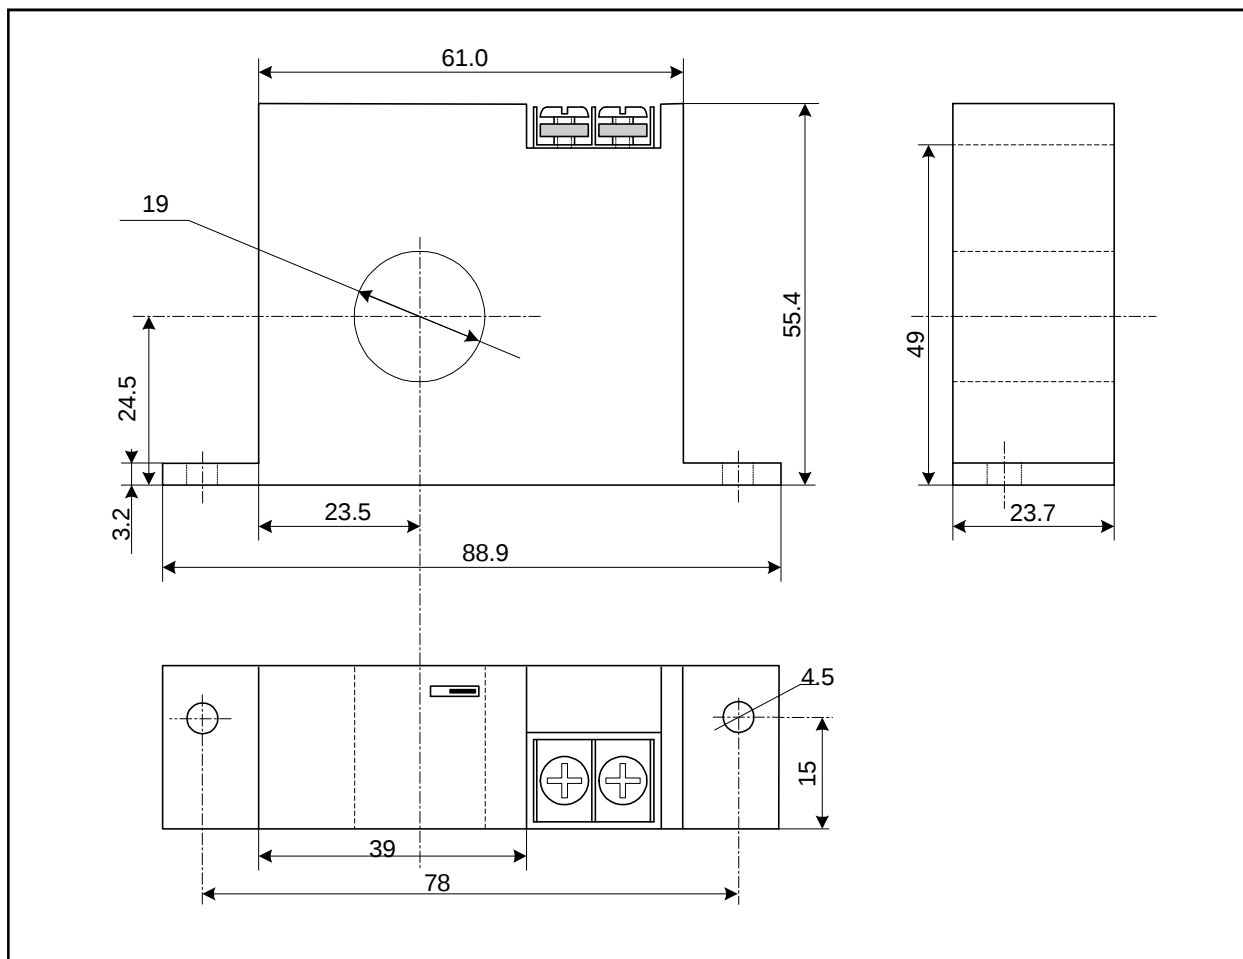

Mechanical characteristics


- General tolerance ± 1 mm
- Primary aperture 19 mm
- Panel mounting 2 holes $\varnothing 4.5$ mm
- Distance between holes 78 mm

Remark

- Temperature of the primary conductor should not exceed 60°C.


Connections

- 2 x UNC8 Cylindric Head

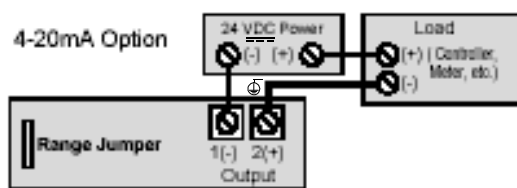

Notes: - Captive screw terminals.
- 12-22 AWG solid or stranded.
- Observe polarity.

Power Supply diagram

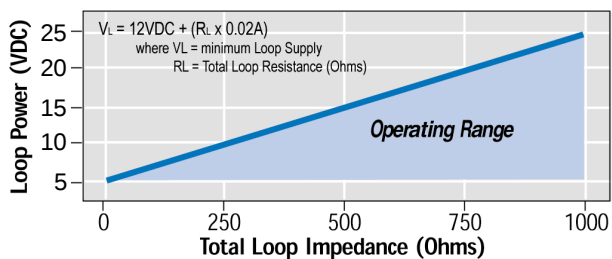

060512/6

Page 2/2

LEM reserves the right to carry out modifications on its transducers, in order to improve them, without previous notice.