



SSV66A-1G Series

Vertical switches G1" mount



- External mount via G1" (1"BSP) thread
- High buoyancy float (0.55 SG)
- 20bar max working pressure
- Reversible switch action
- DIN 43650 connector

Technical Specification

Mounting style	External	Connection	DIN 43650 Plug
Mounting thread	1"BSP		
Float & Stem material	316 grade SS		
Maximum Temperature	120°C		
Maximum pressure	20 bar		
Float SG	0.55		
Minimum fluid SG	0.6		
		Tightening torque should be adequate to ensure a good seal.	

Electrical Specification

Contact Form		N/O (N/C)
Switching Power Max	VA	50
Switching Voltage AC Max	V	300
Switching Voltage DC Max	V	300
Switching Current Max	A	0.5

All ratings are for resistive loads only.


Top mount level switch with G1" (1"BSP) thread, enables this switch can be fitted to a tank through a G1" boss, without requiring access to the inside of the tank.

The DIN 43650 connector makes for easy connection.

The switch action may be reversed by removing the float, inverting and refitting it.

Custom versions can be made for particular applications. Please contact Cynergy3 with your requirements.

Mechanical Dimensions

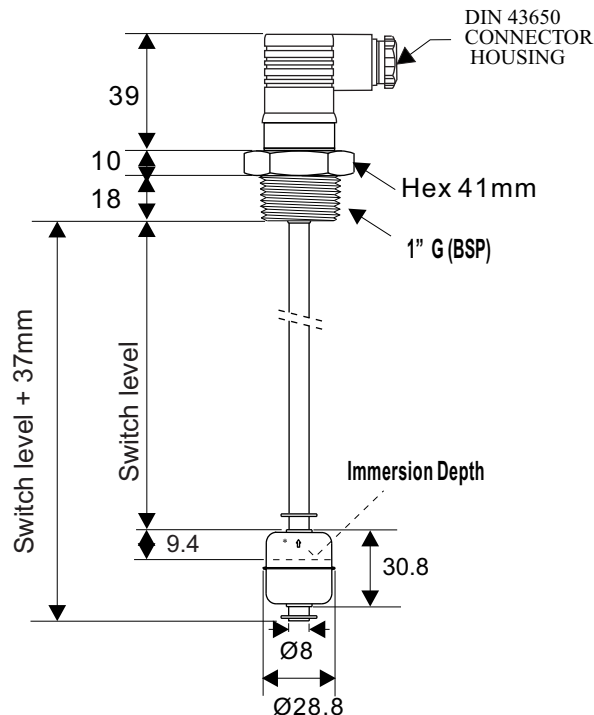

Cynergy3 Components Ltd.
7 Cobham Road
Ferndown Industrial Estate
Wimborne, Dorset BH21 7PE
Telephone +44 (0) 1202 897969

Email:sales@cynergy3.com

ISO9001 CERTIFIED

www.cynergy3.com