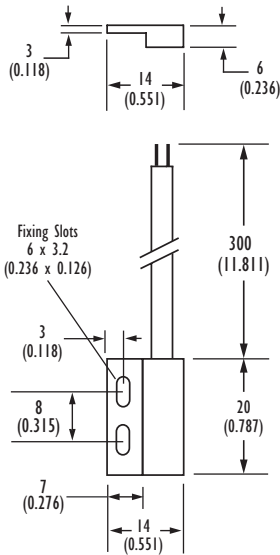


Part Number : MMPSA 240/30

Proximity Switch - Reed Switch based

Rectangular - Normally Open Contacts - Suggested Magnet: MMPSM

Product Data Sheet

PICTURE	DIMENSIONS	Applications Include
	 Drawings not to scale All dimensions in mm(inches) nominal	Applications Include • Position and limit sensing. • Linear actuators . • Security system switch. • Door Switch. Options • Also available in all Black. • White economy version available. • Left and Right hand versions available. • Custom cable lengths, strip lengths, cable types, terminations. • If you do not see what you need, just ask, as there is a strong possibility we can do it !

SPECIFICATION	
Contact Form / Style	Normally Open
Switching Capacity (Resistive)	10 W/VA Max.
Switching Voltage	400 VAC Max.
Switching Current	0.5 A. Max.
Carry Current	1.0 A. Max.
Breakdown Voltage	600 VDC Min.
Contact Resistance	150 mOhms Max.
Switching Distance	10 mm Min.
Operating Temperature Range	-20°C +85°C
Storage temperature	-25°C +90°C
Case Material	Blue Nylon 66
Cable	2 x Round 0.14mm ² PVC covered Grey and insulated Brown / White

Did you know we also sell?









Float Switches Magnets Movement Sensors Tilt / Tip Switches Acceleration / Shock Switches Reed Relays Solid State Relays

Rev. No.	Revision Note	Date	Signature
2	Datasheet Redesign	28-07-06	LG