




Shielded Power Inductors – EPL3012

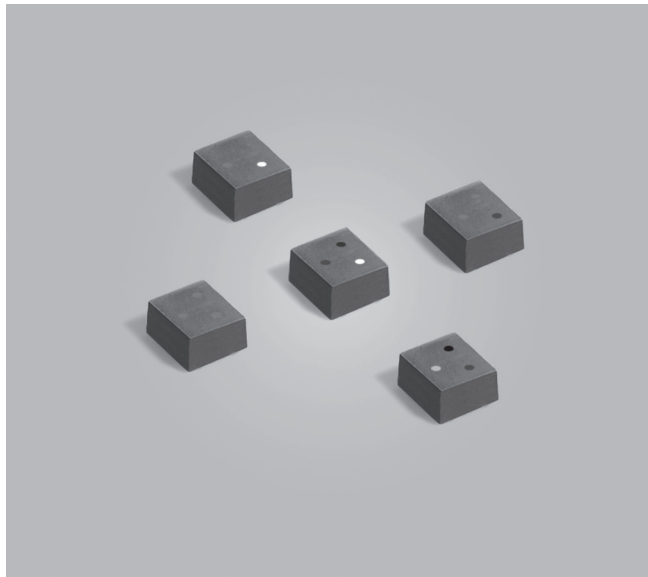

- Low profile shielded power inductors; 3 × 3 × 1.3 mm max.
- Very low DCR and high SRF ratings
- Isat ratings up to 2.0 A; soft saturation

Designer's Kit C437 contains 5 each of all values

Core material Ferrite

Environmental RoHS compliant, halogen free

Terminations RoHS compliant tin-silver-copper (96.5/3/0.5) over tin over nickel over silver-platinum. Other terminations available at additional cost.

Weight 38 – 42 mg

Ambient temperature –40°C to +85°C with Irms current, +85°C to +125°C with derated current

Storage temperature Component: –40°C to +125°C.
Tape and reel packaging: –40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Failures in Time (FIT) / Mean Time Between Failures (MTBF)

38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332

Packaging 2000/7" reel; 7500/13" reel Plastic tape: 8 mm wide, 0.2 mm thick, 4 mm pocket spacing, 1.55 mm pocket depth

PCB washing Only pure water or alcohol recommended

Part number ¹	Inductance ² ±20% (μH)	DCR (Ohms) ³		SRF typ ⁴ (MHz)	Isat (A) ⁵			Irms (A) ⁶	
		nom	max		10% drop	20% drop	30% drop	20°C rise	40°C rise
EPL3012-102ML_	1.0	0.060	0.066	110	0.85	1.4	2.0	1.7	2.2
EPL3012-152ML_	1.5	0.069	0.075	103	0.70	1.2	1.7	1.5	1.9
EPL3012-182ML_	1.8	0.076	0.084	92	0.65	1.1	1.6	1.4	1.8
EPL3012-222ML_	2.2	0.097	0.106	76	0.55	0.95	1.4	1.3	1.7
EPL3012-332ML_	3.3	0.136	0.150	62	0.50	0.90	1.1	1.1	1.4
EPL3012-472ML_	4.7	0.165	0.181	52	0.47	0.85	1.0	0.90	1.1
EPL3012-103ML_	10	0.316	0.348	32	0.34	0.59	0.80	0.60	0.79
EPL3012-223ML_	22	0.718	0.790	18	0.17	0.38	0.61	0.42	0.54

1. When ordering, please specify **packaging** code:

EPL3012-223MLC

Packaging: C = 7" machine-ready reel. EIA-481 embossed plastic tape (2000 parts per full reel).

B = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter C instead.

D = 13" machine-ready reel. EIA-481 embossed plastic tape. Factory order only, not stocked (7500 parts per full reel).

2. Inductance tested at 100 kHz, 0.1 Vrms, 0 Adc.

3. DCR measured on a micro-ohmmeter.

4. SRF measured using Agilent/HP 4395A network analyzer or equivalent.

5. DC current at which the inductance drops the specified amount from its value without current.

6. Current that causes the specified temperature rise from 25°C ambient.

7. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.



www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com

UK +44-1236-730595 sales@coilcraft-europe.com

Taiwan +886-2-2264 3646 sales@coilcraft.com.tw

China +86-21-6218 8074 sales@coilcraft.com.cn

Singapore +65-6484 8412 sales@coilcraft.com.sg

Document 692-1 Revised 12/27/11


© Coilcraft Inc. 2011

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.




Shielded Power Inductors – EPL3012 Series






L vs Current

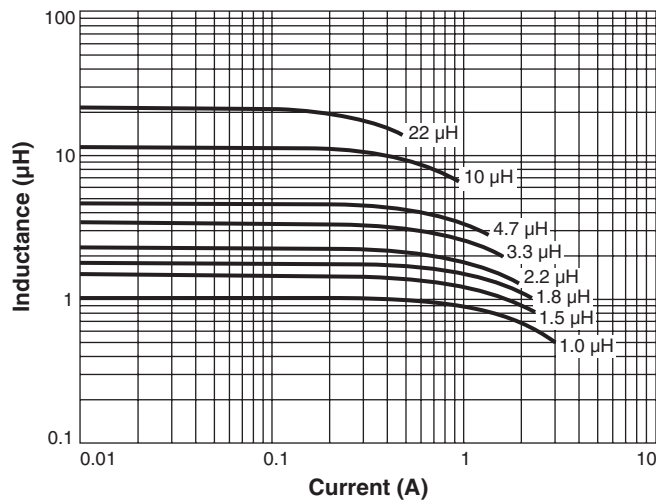


L vs Frequency

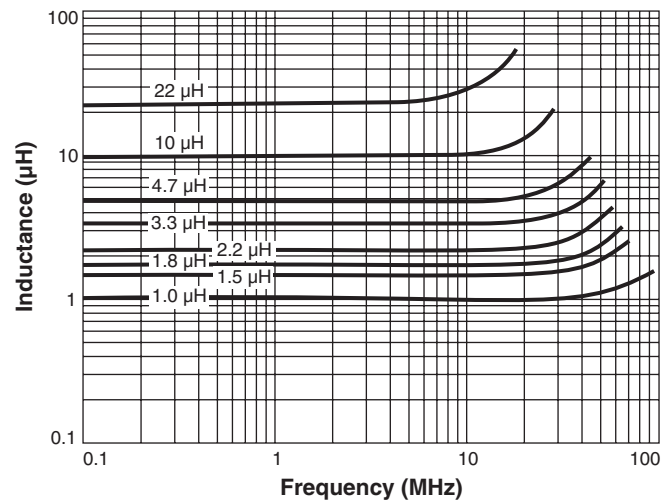

Irms Derating

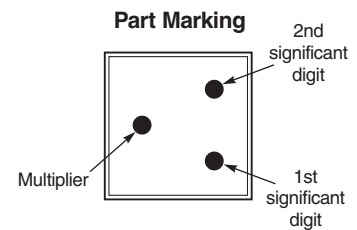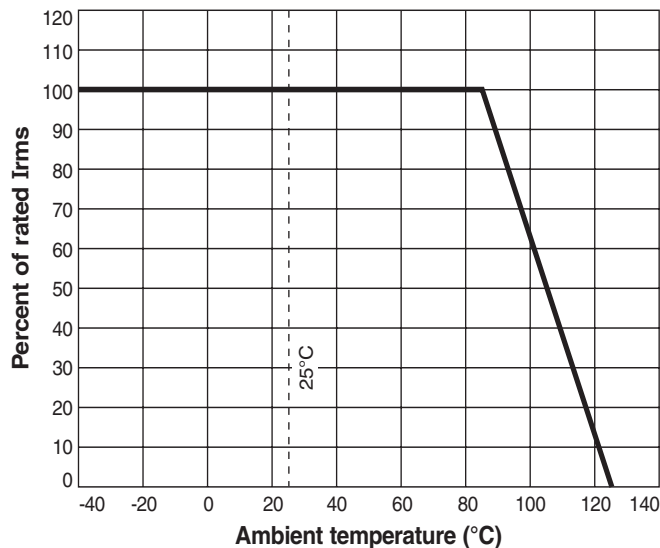

Recommended Land Pattern



Small surface blemishes are not unusual and do not adversely affect performance.
Wire may be visible inside the voids.

Acceptable void sizes:

Top: 0.01 in / 0.254 mm × 0.01 in / 0.254 mm

Sides: 0.02 in / 0.5 mm × 0.047 in / 1.2 mm

Dimensions are in $\frac{\text{inches}}{\text{mm}}$

Part Marking

Part number	Value	1st digit	2nd digit	Multiplier
EPL3012-102	1.0 μ H	Brown	Black	Red
EPL3012-152	1.5 μ H	Brown	Green	Red
EPL3012-182	1.8 μ H	Brown	Gray	Red
EPL3012-222	2.2 μ H	Red	Red	Red
EPL3012-332	3.3 μ H	Orange	Orange	Red
EPL3012-472	4.7 μ H	Yellow	Violet	Red
EPL3012-103	10 μ H	Brown	Black	Orange
EPL3012-223	22 μ H	Red	Red	Orange

Note: All marked parts have three dots. Black dot, used only on the -102 and -103 as second significant digit, may be very difficult to see.



www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore +65-6484 8412 sales@coilcraft.com.sg

Document 692-2 Revised 12/27/11

© Coilcraft Inc. 2011

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.