



Shielded Power Inductors – LPS5015



- Very low DCR; excellent current handling
- 5.0 × 5.0 mm footprint; less than 1.5 mm tall

Designer's Kit C350 contains 3 each of all values

Core material Ferrite

Core and winding loss See www.coilcraft.com/coreloss

Terminations RoHS compliant silver-palladium-platinum-glass frit. Other terminations available at additional cost.

Weight 102 – 107 mg

Ambient temperature –40°C to +85°C with Irms current, +85°C to +125°C with derated current

Storage temperature Component: –40°C to +125°C.
Tape and reel packaging: –40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Failures in Time (FIT) / Mean Time Between Failures (MTBF)

38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332

Packaging 1000/7" reel; 3500/13" reel Plastic tape: 12 mm wide, 0.3 mm thick, 8 mm pocket spacing, 1.57 mm pocket depth

Recommended pick and place nozzle OD: 5 mm; ID: ≤ 2.5 mm

PCB washing Only pure water or alcohol recommended

Part number ¹	Inductance ² ±20% (μH)	DCR max ³ (Ohms)	SRF typ ⁴ (MHz)	Isat (A) ⁵			Irms (A) ⁶	
				10% drop	20% drop	30% drop	20°C rise	40°C rise
LPS5015-102ML	1.0	0.050	183	3.6	3.8	3.9	1.90	2.65
LPS5015-132ML	1.3	0.065	150	2.5	2.6	2.8	1.70	2.35
LPS5015-182ML	1.8	0.075	128	2.6	2.8	2.9	1.50	2.15
LPS5015-222ML	2.2	0.090	116	2.4	2.6	2.7	1.40	2.00
LPS5015-332ML	3.3	0.125	88	1.9	2.0	2.0	1.30	1.80
LPS5015-472ML	4.7	0.150	73	1.6	1.7	1.8	1.20	1.62
LPS5015-562ML	5.6	0.175	67	1.6	1.6	1.6	1.10	1.45
LPS5015-682ML	6.8	0.225	57	1.3	1.4	1.5	0.90	1.25
LPS5015-822ML	8.2	0.280	49	1.3	1.3	1.4	0.85	1.05
LPS5015-103ML	10	0.300	44	1.2	1.3	1.3	0.80	0.95
LPS5015-123ML	12	0.350	40	1.0	1.1	1.2	0.75	0.84
LPS5015-153ML	15	0.360	38	0.80	0.84	0.86	0.73	0.84
LPS5015-183ML	18	0.550	35	0.75	0.77	0.80	0.70	0.83
LPS5015-223ML	22	0.675	31	0.70	0.73	0.75	0.60	0.82
LPS5015-333ML	33	0.750	24	0.55	0.59	0.60	0.50	0.70
LPS5015-473ML	47	1.00	18	0.46	0.48	0.49	0.45	0.57
LPS5015-563ML	56	1.13	17	0.40	0.43	0.45	0.40	0.52
LPS5015-683ML	68	1.45	15	0.33	0.38	0.39	0.35	0.47
LPS5015-104ML	100	1.95	12	0.30	0.33	0.34	0.30	0.42
LPS5015-124ML	120	2.50	10	0.25	0.28	0.30	0.27	0.37
LPS5015-154ML	150	3.40	9.3	0.23	0.25	0.26	0.25	0.33
LPS5015-224ML	220	4.50	7.3	0.20	0.21	0.22	0.22	0.29
LPS5015-334ML	330	7.40	5.7	0.15	0.17	0.18	0.17	0.22
LPS5015-474ML	470	7.50	4.9	0.12	0.12	0.13	0.16	0.21
LPS5015-564ML	560	8.50	4.3	0.10	0.11	0.12	0.14	0.190
LPS5015-684ML	680	10.6	4.0	0.10	0.11	0.11	0.13	0.175
LPS5015-105ML	1000	15.0	3.2	0.080	0.090	0.093	0.10	0.150
LPS5015-155ML	1500	25.0	2.5	0.080	0.086	0.088	0.090	0.140
LPS5015-185ML	1800	28.0	2.2	0.078	0.083	0.086	0.085	0.130
LPS5015-225ML	2200	36.0	2.1	0.072	0.078	0.080	0.065	0.090
LPS5015-335ML	3300	55.0	1.7	0.064	0.072	0.076	0.055	0.075
LPS5015-475ML	4700	80.0	1.4	0.062	0.069	0.072	0.045	0.065

1. Please specify **termination** and **packaging** codes:

LPS5015-335MLC

Termination: L = RoHS compliant silver-palladium-platinum-glass frit.

Special order:

T = RoHS tin-silver-copper (95.5/4/0.5) or S = non-RoHS tin-lead (63/37).

Packaging: C = 7" machine-ready reel. EIA-481 embossed plastic tape 1000 parts per full reel).

B = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter C instead.

D = 13" machine-ready reel. EIA-481 embossed plastic tape. Factory order only, not stocked (3500 parts per full reel).

2. Inductance tested at 100 kHz, 0.1 Vrms using an Agilent/HP 4192A.

3. DCR measured on a micro-ohmmeter.

4. SRF measured using Agilent/HP 8753ES or equivalent.

5. DC current that causes the specified inductance drop from its value without current.

6. Current that causes the specified temperature rise from 25°C ambient.

7. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.



www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com

UK +44-1236-730595 sales@coilcraft-europe.com

Taiwan +886-2-2264 3646 sales@coilcraft.com.tw

China +86-21-6218 8074 sales@coilcraft.com.cn

Singapore +65-6484 8412 sales@coilcraft.com.sg

Document 585-1 Revised 12/08/11


© Coilcraft Inc. 2011

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.




Shielded Power Inductors – LPS5015 Series



Typical L vs Frequency

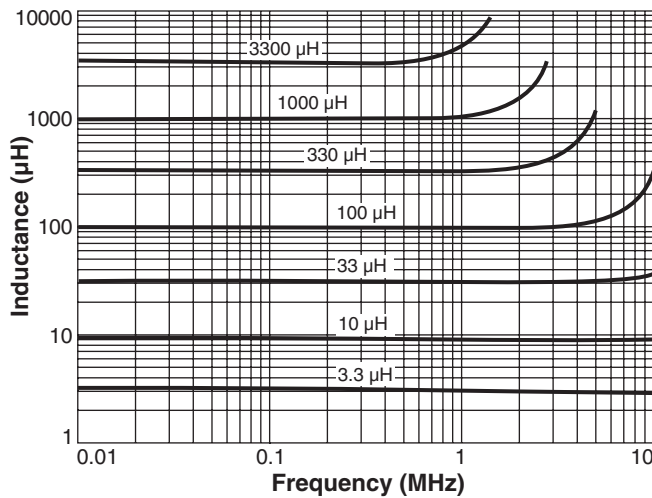

Typical L vs Current

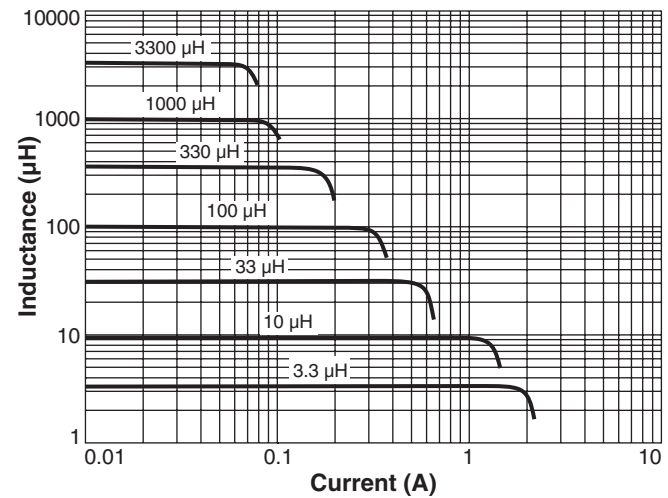

Typical Current Derating

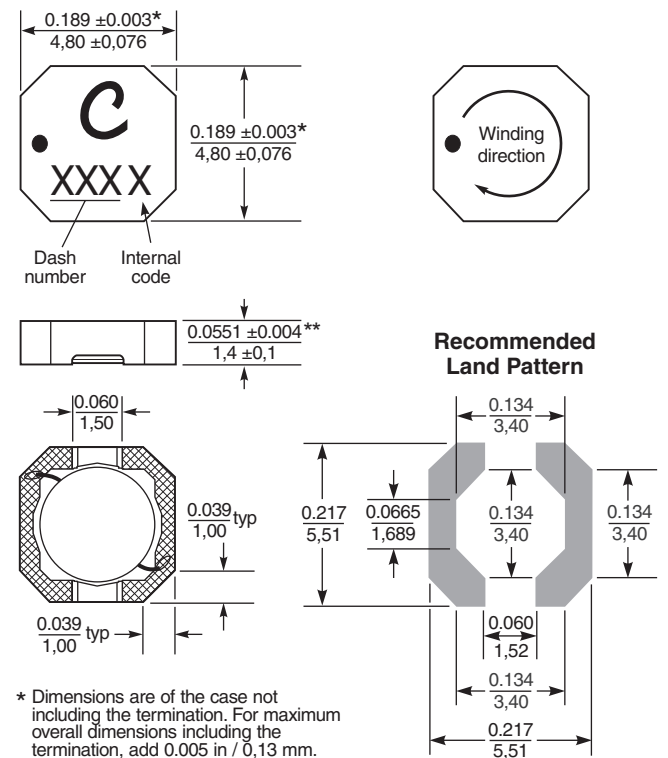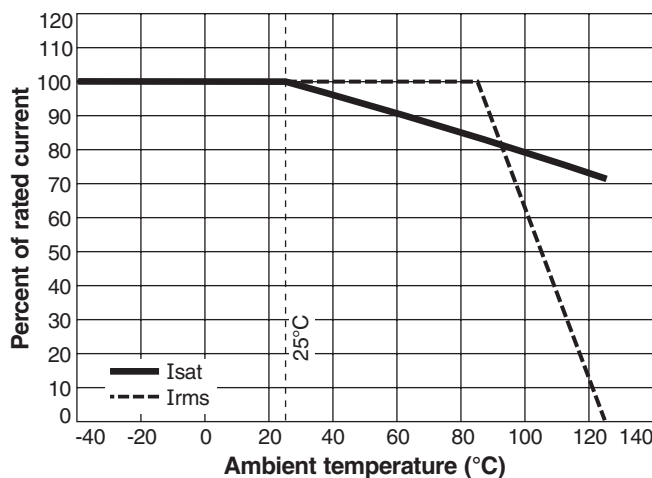

* Dimensions are of the case not including the termination. For maximum overall dimensions including the termination, add 0.005 in / 0.13 mm.

**For optional tin-lead and tin-silver-copper terminations, dimensions are for the mounted part. Dimensions before mounting can be an additional 0.005 inch (0.13 mm).

Dimensions are in $\frac{\text{inches}}{\text{mm}}$



www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com
 UK +44-1236-730595 sales@coilcraft-europe.com
 Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
 China +86-21-6218 8074 sales@coilcraft.com.cn
 Singapore +65-6484 8412 sales@coilcraft.com.sg

Document 585-2 Revised 12/08/11

© Coilcraft Inc. 2011

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.