




Shielded Power Inductors – LPS6225

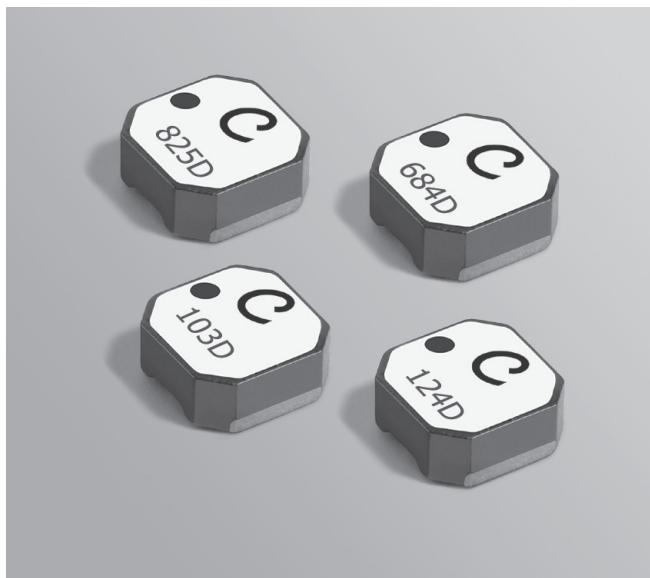

- Low DCR; high current; shielded construction
- Perfect for backlight applications

Designer's Kit C349 contains 3 each of all values

Core material Ferrite

Core and winding loss See www.coilcraft.com/coreloss

Terminations RoHS compliant silver-palladium-platinum-glass frit. Other terminations available at additional cost.

Weight 309 – 331 mg

Ambient temperature –40°C to +85°C with Irms current, +85°C to +125°C with derated current

Storage temperature Component: –40°C to +125°C.

Tape and reel packaging: –40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Failures in Time (FIT) / Mean Time Between Failures (MTBF)

38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332

Packaging 750/7" reel; 2500/13" reel Plastic tape: 12 mm wide, 0.3 mm thick, 8 mm pocket spacing, 2.57 mm pocket depth

Recommended pick and place nozzle OD: 6.2 mm; ID: ≤ 3.1 mm

PCB washing Only pure water or alcohol recommended

Part number ¹	Inductance ² ± 20% (µH)	DCR max ³ (Ohms)	SRF typ ⁴ (MHz)	Isat (A) ⁵			Irms (A) ⁶	
				10% drop	20% drop	30% drop	20°C rise	40°C rise
LPS6225-122ML	1.2	0.040	178	5.3	5.4	5.4	1.1	1.65
LPS6225-222ML	2.2	0.045	100	3.9	4.0	4.1	1.0	1.40
LPS6225-332ML	3.3	0.055	68	3.5	3.5	3.6	1.0	1.35
LPS6225-472ML	4.7	0.065	53	3.0	3.1	3.2	0.90	1.30
LPS6225-682ML	6.8	0.095	40	2.6	2.7	2.8	0.90	1.30
LPS6225-103ML	10	0.105	35	2.1	2.1	2.2	0.90	1.30
LPS6225-153ML	15	0.135	23	2.1	2.2	2.2	0.85	1.20
LPS6225-223ML	22	0.175	17	1.4	1.5	1.6	0.80	1.10
LPS6225-333ML	33	0.260	14	1.1	1.2	1.2	0.65	0.90
LPS6225-473ML	47	0.360	10	0.98	1.0	1.0	0.60	0.80
LPS6225-683ML	68	0.420	9.6	0.58	0.61	0.62	0.57	0.74
LPS6225-104ML	100	0.610	7.7	0.48	0.51	0.52	0.47	0.64
LPS6225-124ML	120	0.750	7.4	0.42	0.45	0.46	0.43	0.58
LPS6225-154ML	150	0.920	6.4	0.39	0.41	0.42	0.40	0.54
LPS6225-224ML	220	1.30	5.0	0.32	0.34	0.35	0.37	0.50
LPS6225-334ML	330	2.00	3.8	0.26	0.27	0.28	0.28	0.39
LPS6225-474ML	470	2.60	3.2	0.22	0.23	0.24	0.24	0.37
LPS6225-684ML	680	4.00	2.8	0.18	0.19	0.20	0.18	0.26
LPS6225-105ML	1000	6.00	2.3	0.15	0.16	0.17	0.15	0.24
LPS6225-155ML	1500	9.00	1.8	0.12	0.13	0.13	0.13	0.20
LPS6225-185ML	1800	11.7	1.7	0.11	0.12	0.12	0.11	0.14
LPS6225-225ML	2200	13.5	1.3	0.10	0.10	0.11	0.11	0.13
LPS6225-335ML	3300	21.0	1.1	0.099	0.10	0.11	0.080	0.11
LPS6225-475ML	4700	30.0	0.90	0.086	0.096	0.10	0.075	0.090
LPS6225-565ML	5600	36.0	0.72	0.083	0.090	0.096	0.070	0.090
LPS6225-685ML	6800	43.0	0.70	0.080	0.086	0.089	0.065	0.080
LPS6225-825ML	8200	54.0	0.69	0.079	0.086	0.088	0.060	0.075
LPS6225-106ML	10000	70.0	0.68	0.075	0.084	0.087	0.060	0.065

1. Please specify **termination** and **packaging** codes:

LPS6225-106MLC

Termination: L = RoHS compliant silver-palladium-platinum-glass frit.

Special order:

T = RoHS tin-silver-copper (95.5/4/0.5)
or S = non-RoHS tin-lead (63/37).

Packaging: C = 7" machine-ready reel. EIA-481 embossed plastic tape (750 parts per full reel).

B = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter C instead.

D = 13" machine-ready reel. EIA-481 embossed plastic tape. Factory order only, not stocked (2500 parts per full reel).

2. Inductance tested at 100 kHz, 0.1 Vrms, 0 Adc.

3. DCR measured on a micro-ohmmeter.

4. SRF measured using Agilent/HP 8753ES or equivalent.

5. DC current that causes the specified inductance drop from its value without current.

6. Current that causes the specified temperature rise from 25°C ambient.

7. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.



www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com

UK +44-1236-730595 sales@coilcraft-europe.com

Taiwan +886-2-2264 3646 sales@coilcraft.com.tw

China +86-21-6218 8074 sales@coilcraft.com.cn

Singapore +65-6484 8412 sales@coilcraft.com.sg

Document 554-1 Revised 12/01/11


© Coilcraft Inc. 2011

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.




Shielded SMT Power Inductors – LPS6225 Series



Typical L vs Current

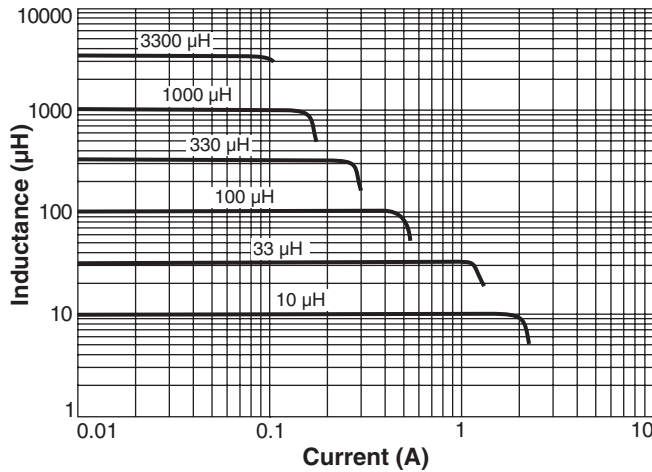

Typical L vs Frequency

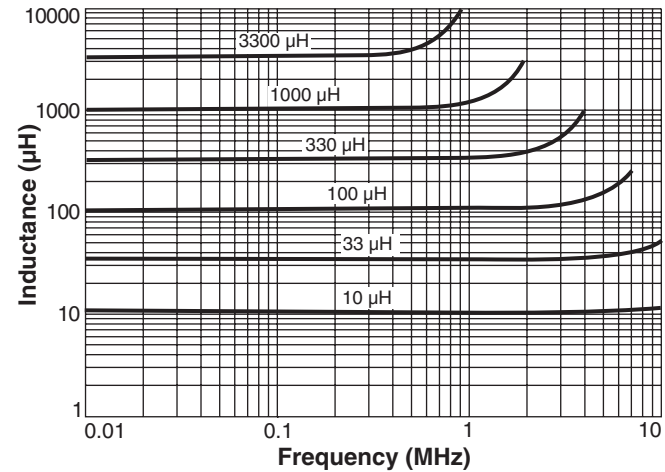

Current Derating

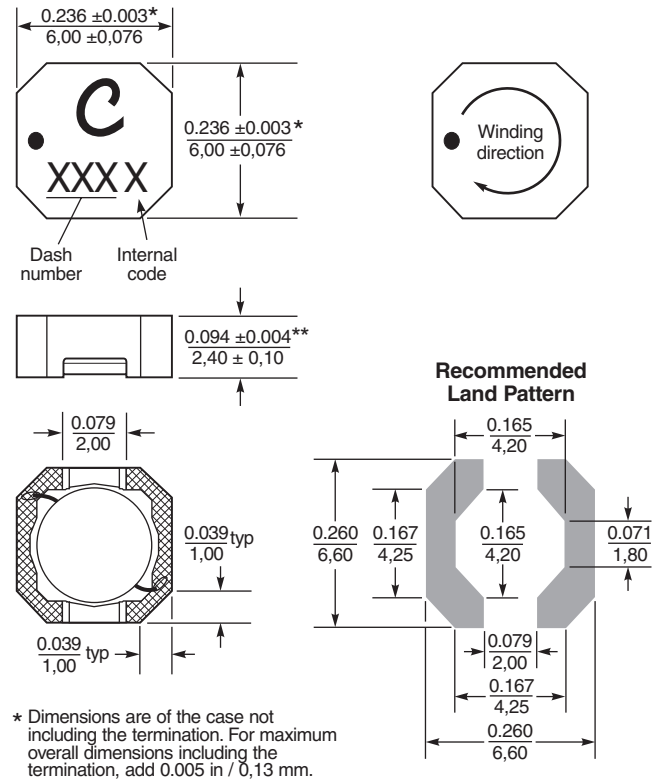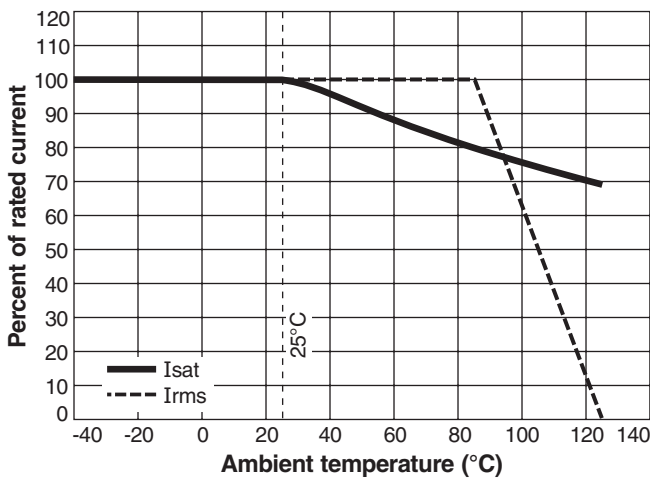

* Dimensions are of the case not including the termination. For maximum overall dimensions including the termination, add 0.005 in / 0.13 mm.

**For optional tin-lead and tin-silver-copper terminations, dimensions are for the mounted part. Dimensions before mounting can be an additional 0.005 inch (0.13 mm).

Dimensions are in $\frac{\text{inches}}{\text{mm}}$



www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com
 UK +44-1236-730595 sales@coilcraft-europe.com
 Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
 China +86-21-6218 8074 sales@coilcraft.com.cn
 Singapore +65-6484 8412 sales@coilcraft.com.sg

Document 554-2 Revised 12/01/11

© Coilcraft Inc. 2011

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.