


CM4732V201R-10

UNCONTROLLED
DOCUMENT




PHYSICAL DIMENSIONS:

A	11.94 [.470]	+ 0.18 [.007]
B	8.13 [.320]	+ 0.13 [.005]
B ₁	10.92 [.430]	MAX
C	9.45 [.372]	+ 0.15 [.006]
C ₁	10.08 [.397]	MAX
D	4.06 [.160]	+ 0.05 [.002]
E	1.27 [.050]	+ 0.13 [.005]
E ₁	2.03 [.080]	+ 0.13 [.005]

WIRE DIMENSIONS:

T ₁	3.30 [.130]	+ 0.38 [.015]
T ₂	0.64 [.025]	TYP
T ₃	0.38 [.015]	TYP


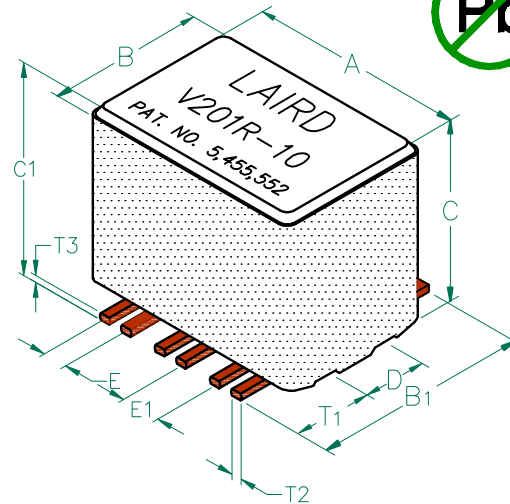


ELECTRICAL CHARACTERISTICS:


Z @ 100MHz (Ω)	DCR (Ω)	Rated Current	Rated Voltage (VDC)
Nominal	200		
Minimum	150		
Maximum	250	0.01	8,000 mA
			30

NOTES: UNLESS OTHERWISE SPECIFIED


1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 13" REELS, 400 PCS/REEL.
2. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.
3. REF. CARRIER TAPE SPECIFICATION #CART4732-23.
4. TERMINATION FINISH IS 100% TIN.
5. THIS PART HAS NO PIN POLARITY.
6. OPERATION TEMPERATURE (INCLUDING SELF-HEATING): -40 ~ +125°C.

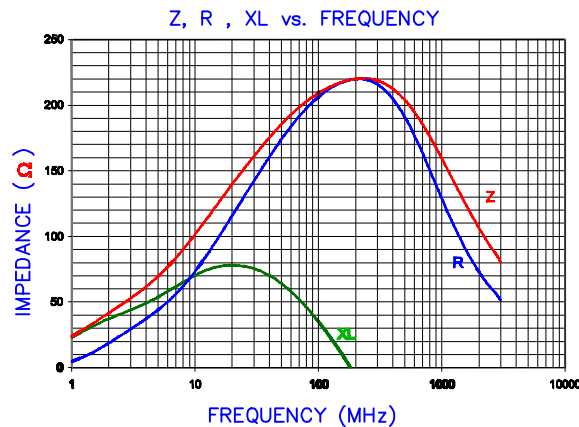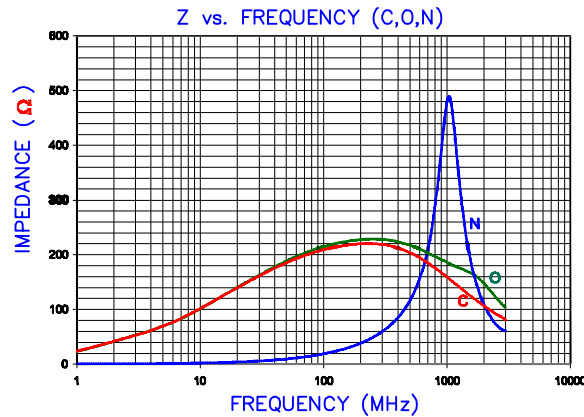


LAND PATTERNS FOR REFLOW SOLDERING

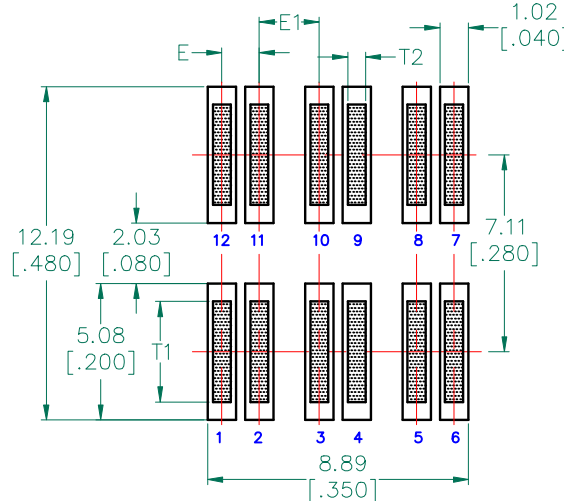

RECOMMENDED SOLDERING CONDITIONS





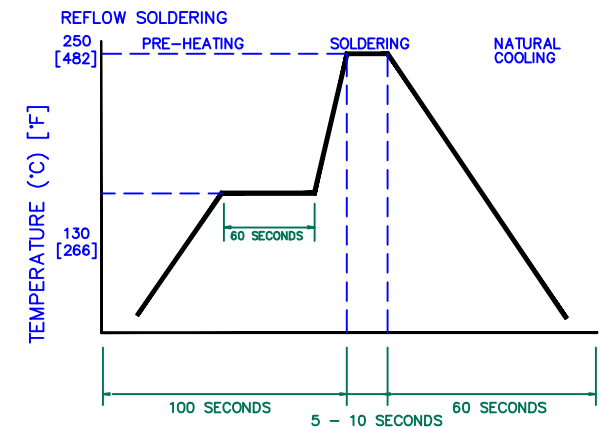


EQUIVALENT CIRCUIT



DIMENSIONS ARE IN mm (INCHES).

This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.			
D	ADD RATED VOLTAGE AND NOTE 6	08/30/12	QIU
C	UPDATE COMPANY LOGO & KAPTON KAPTON LABEL ADD EQUIV. CIRCUIT	11/11/08	JRK
B	UPDATE COMPANY LOGO	12/11/07	JRK
A	ORIGINAL DRAFT	06/03/04	JRK
REV	DESCRIPTION	DATE	INT
PROJECT/PART NUMBER: CM4732V201R-10			
SCALE: NTS		SHEET: 2 of 3	
TOOL # H0470-2		DRAWN BY: JRK	

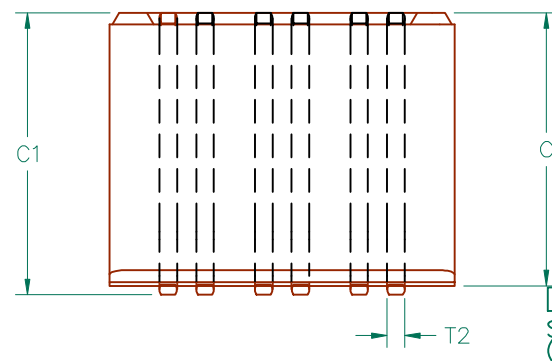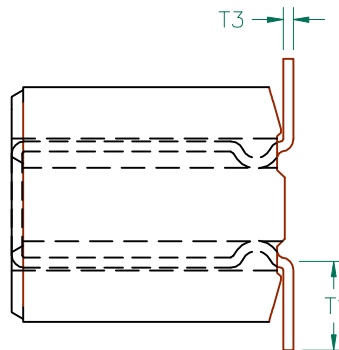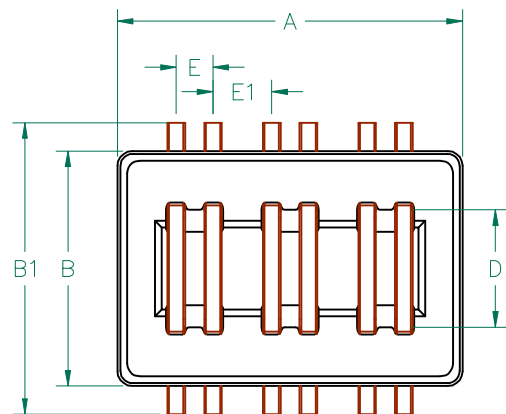

LABEL



ELECTRICAL TESTING

TEST:	GROSS	GROSS
# TURNS	1	1
AWG	22	22
FREQUENCY	25 MHz	100 MHz
NOMINAL	113 Ω	200 Ω
MINIMUM	- Ω	150 Ω
MAXIMUM	- Ω	250 Ω
WEIGHT/1000	3.86 kgs.	8.52 lbs.

DIMENSIONS:

A	11.94 [.470]	+	0.18 [.007]
B	8.13 [.320]	+	0.13 [.005]
B1	10.92 [.430]		MAX
C	9.45 [.372]	+	0.15 [.006]
C1	10.08 [.397]		MAX
D	4.06 [.160]	+	0.05 [.002]
E	1.27 [.050]	+	0.13 [.005]
E1	2.03 [.080]	+	0.13 [.005]

WIRE DIMENSIONS:

T1	3.30 [.130]	+	0.38 [.015]
T2	0.64 [.025]		TYP.
T3	0.38 [.015]		TYP.

UNCONTROLLED
DOCUMENT

NOTES: UNLESS OTHERWISE SPECIFIED

1. WIRE: REFERENCE STEWARD WIRE PURCHASE SPEC. W0032-21.
2. IMPEDANCE VALUES ARE GROSS, MEASURED USING W0032-21 WIRE PLACED AGAINST END OF SLOT w/ NO D.C. BIAS.
3. REFERENCE STEWARD CORE P/N 24H0470-200.
4. PROTECTED BY U.S. PATENT NO. 5,455,552.
5. TERMINATION FINISH IS 100% TIN.
6. THIS PART HAS NO PIN POLARITY.

DIMENSIONS ARE IN mm (INCHES).				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.			
D	ADD RATED VOLTAGE AND NOTE 6	08/30/12	QIU				
C	UPDATE COMPANY LOGO & KAPTON KAPTON LABEL ADD EQUIV. CIRCUIT	11/11/08	JRK				
B	UPDATE COMPANY LOGO	12/11/07	JRK				
A	ORIGINAL DRAFT	06/03/04	JRK				
REV	DESCRIPTION	DATE	INT				
PROJECT/PART NUMBER:				CM4732V201R-10			
DATE:				06/03/04			
CAD #				CM4732V201R-10-D-3			
REV				H0470-2			
SCALE:				NTS			
SHEET:				3 of 3			