



1

2


3

4

5

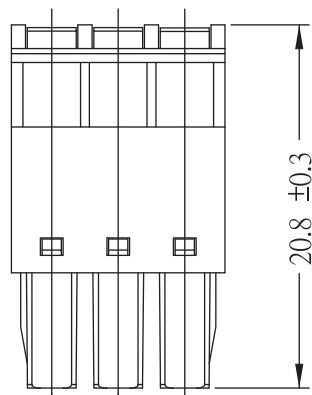

3.81 ±0.1

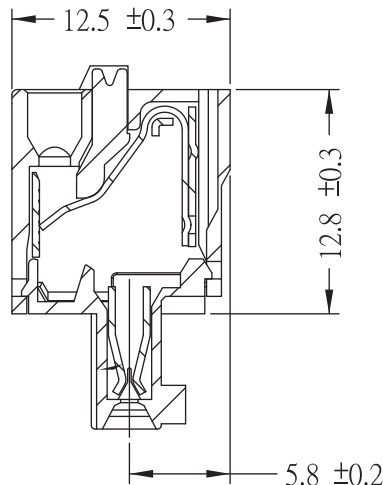

Pitch:3.81mm	
Poles	A(mm)
2	8.42
3	12.23
4	16.04
5	19.85
6	23.66
7	27.47
8	31.28
9	35.09
10	38.90
11	42.71
12	46.52
14	54.14

TECHNICAL CHARACTERISTICS

MATERIAL

INSULATOR: PA 66
FLAMABILITY RATING: UL94-V0
COLOR: GREEN & ORANGE
METAL SPRING: STAINLESS STRIP STEEL
WIRE GUARD: PbZn TIN PLATED

ENVIRONMENTAL

OPERATING TEMPERATURE: -40 UP TO 115°C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL

CURRENT RATING: 8A
WORKING VOLTAGE: 300VAC
WITHSTANDING VOLTAGE: 2.0KV
CONTACT RESISTANCE: 20 mOhm max

STANDARD

cULus CERTIFIED E315414

MECHANICAL

SOLID WIRE: 28-16 AWG / 0.081-1.31 MM²
STRANDED WIRE: 28-16 AWG / 0.081-1.31 MM²

WIRE STRIPE LENGTH: 9 MM
PITCH: 3.81 MM

PACKAGING
BOX

RoHS Compliant

PROJECTION:



GENERAL TOLERANCE

.X = ± 0.2

.XX = ± 0.15



APPROVAL: RJ

UNIT: MM

SCALE:

SHEET: 1/2

DRAW: MARVIN

DESCRIPTION: SERIE 368B - 3.81MM Scwless Vertical Cable Entry Plug

WERI PART NO: 691 368 300 0xx B

SIZE

A4

