




CUSTOMER DATA

PART NO. 1432790-1 SHT. 1 OF 2

DRAWN E.SIMPSON	APPROVAL B. TOEPFER	DATE 05-26-05	SCALE 1:1	CUSTOMER TYCO_ELECTRONICS_STANDARD				
TOLERANCE 0.X = +/- UNLESS 0.XX = +/- SPECIFIED 0.XXX = +/- OTHERWISE ANGLES = +/-				 DO NOT SCALE THIS DRAWING	CHANGES			
					REV.	DATE	CO	APP.
						08-19-05	RELEASE EDS	B.T.
						28APR2010	ECR-10-008018	BT

ELECTRICAL CHARACTERISTICS: (ALL DATA APPLIES @ 23°C UNLESS OTHERWISE SPECIFIED)

COIL DATA:

NOMINAL VOLTAGE: 12 VDC
OPERATE VOLTAGE: 7.8 VDC MAXIMUM
RELEASE VOLTAGE: 1.2 VDC MINIMUM
COIL RESISTANCE: 90 OHMS +/- 10%
OPERATE TIME: 10 mSEC. MAXIMUM EXCLUDING BOUNCE
RELEASE TIME: 13 mSEC. MAXIMUM EXCLUDING BOUNCE
TEMPERATURE RANGE: OPERATING -40°C TO +85°C


CONTACT DATA: (CONTACT DATA IS FORMATTED N.O./N.C.)

CONTACT ARRANGEMENT: 1 FORM C (SPDT)
CONTACT MATERIAL: AgSnO (SILVER TIN-OXIDE)
CONTACT MILLIVOLT DROP: 200mv @ 35A ON N.O. CONTACTS (AFTER SWITCHING)
250mv @ 20A ON N.C. CONTACTS (AFTER SWITCHING)
MAXIMUM MAKE CURRENT: 90A/30A (LAMP) @ 16 VDC
MAXIMUM BREAK CURRENT: 40A/30A @ 16 VDC RESISTIVE
MAXIMUM CONTINUOUS CURRENT: 40A/30A @ 23°C , 35A/20A @ 85°C
INITIAL BREAKDOWN CURRENT 500V RMS CONTACTS TO COIL


EXPECTED LIFE: 100,000 OPERATIONS, 40 A, 14 VDC RESISTIVE ON NORMALLY OPEN CONTACT

MECHANICAL CHARACTERISTICS:




EXPECTED LIFE: 10 MILLION OPERATIONS, NO CONTACT LOAD
TERMINALS BRASS, UNPLATED

DRAWN E. SIMPSON	APPROVAL B. TOEPFER	DATE 05-26-05	SCALE 1:1	CUSTOMER TYCO_ELECTRONICS_STANDARD	
TOLERANCE 0.X = +/- UNLESS 0.XX = +/- SPECIFIED 0.XXX = +/- OTHERWISE ANGLES = +/-					REV B
				DO NOT SCALE THIS DRAWING	MILLIMETERS

MARKING TO INCLUDE:
 TYCO ELECTRONICS NAME, TYCO ELECTRONICS PART NUMBER, SCHEMATIC,
 COIL VOLTAGE, COUNTRY OF ORIGIN, AND DATE CODE

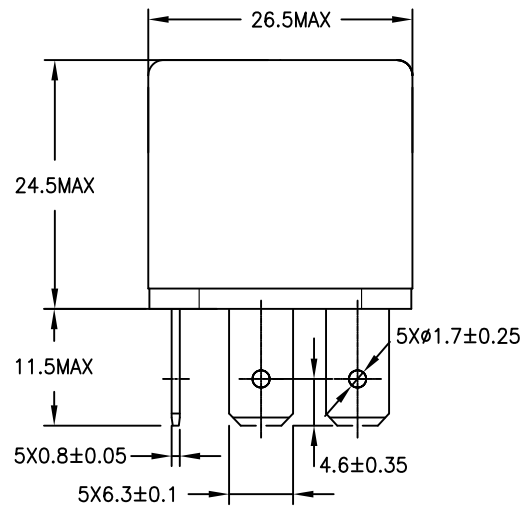

K
 K ASPECT

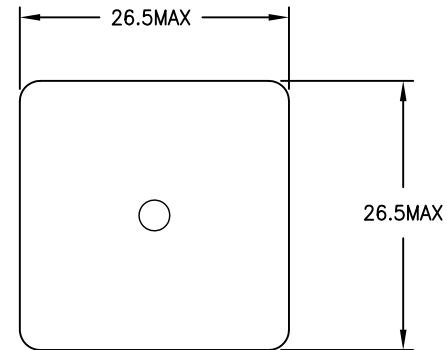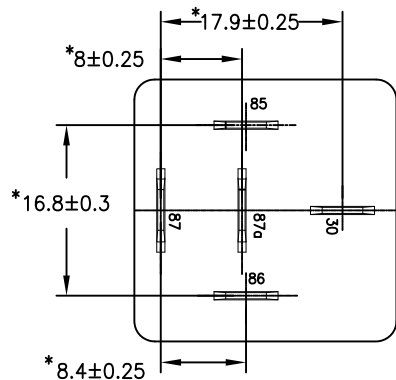

SCHEMATIC DRAWING
 (BOTTOM VIEW)

* TERMINAL LOCATIONS
 APPLY AT THE BASE
 OF THE TERMINALS