



Micro Commercial Components

Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

1N4148WX

High Speed Switching Diode 500mW

Features

- Fast Switching Speed
- Surface Mount Package Ideally Suited for Automatic Insertion
- For General Purpose Switching Applications
- Molded Plastic. UL Flammability Classification Rating 94V-0

Mechanical Data

- Marking : T4
- Terminals: Solderable per MIL-STD-202, Method 208
- Polarity: Indicated by Cathode Band
- Weight: 0.008 grams (approx.)
- Moisture Sensitivity: Level 1 per J-STD-020C

Maximum Ratings @ 25°C Unless Otherwise Specified


Reverse Voltage	V_R	100	V
Peak Reverse Voltage	V_{RM}	75	V
Average Rectified Current	$I_{F(AV)}$	300 ⁽¹⁾	mA
Peak Forward Surge Current $t \leq 1S$	I_{FSM}	2.0	A
Power Dissipation	P_D	500	mW
Thermal Resistance	R_{JA}	315	K/W
Operation/Storage Temp. Range	T_J, T_{STG}	-55 to +150	°C

Electrical Characteristics @ 25°C Unless Otherwise Specified

Maximum Instantaneous Forward Voltage	V_F	1.0V	$I_{FM} = 50mA$; $T_J = 25^\circ C^*$
Maximum DC Reverse Current At Rated DC Blocking Voltage	I_R	25nA 50μA 5.0uA	$V_R = 20Volts$ $T_J = 25^\circ C$ $T_J = 150^\circ C$ $V_R = 75V, T_J = 25^\circ C$
Typical Junction Capacitance	C_J	4pF	$V_F = V_R = 0V$
Maximum Reverse Recovery Time	T_{rr}	4nS	$I_F = 50mA$ $I_{rr} = 0.1I_R$ $R_L = 100\Omega$


* Valid provided that terminals are kept at ambient temperature

SOD323

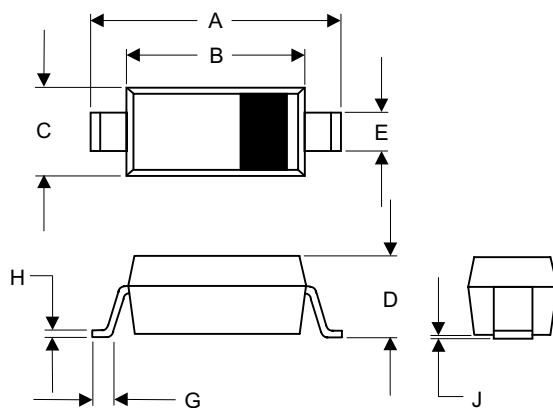

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.090	.107	2.30	2.70	
B	.063	.071	1.60	1.80	
C	.045	.053	1.15	1.35	
D	.031	.045	0.80	1.15	
E	.010	.016	0.25	0.40	
G	.004	.018	0.10	0.45	
H	.004	.010	0.10	0.25	
J	-----	.006	-----	0.15	

SUGGESTED SOLDER PAD LAYOUT

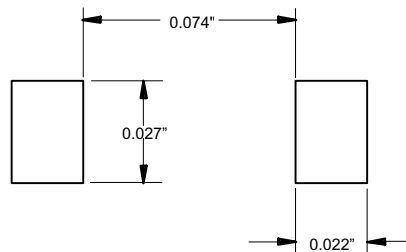

1N4148WX

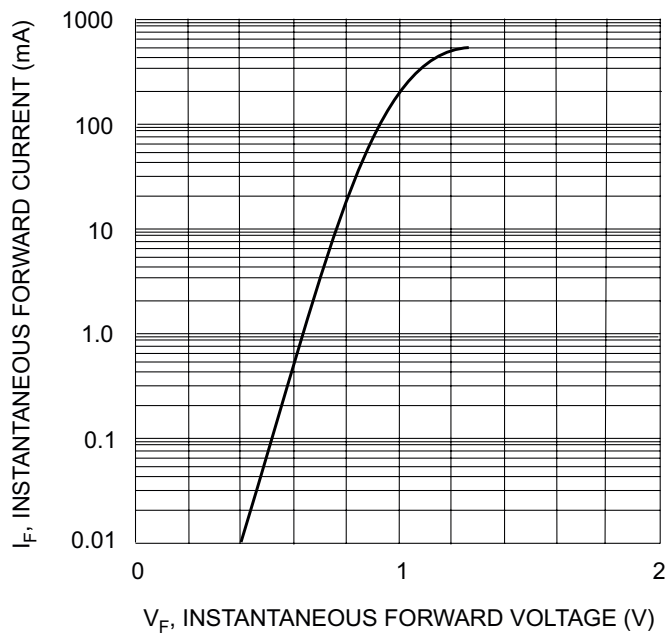


Fig. 1 Forward Characteristics

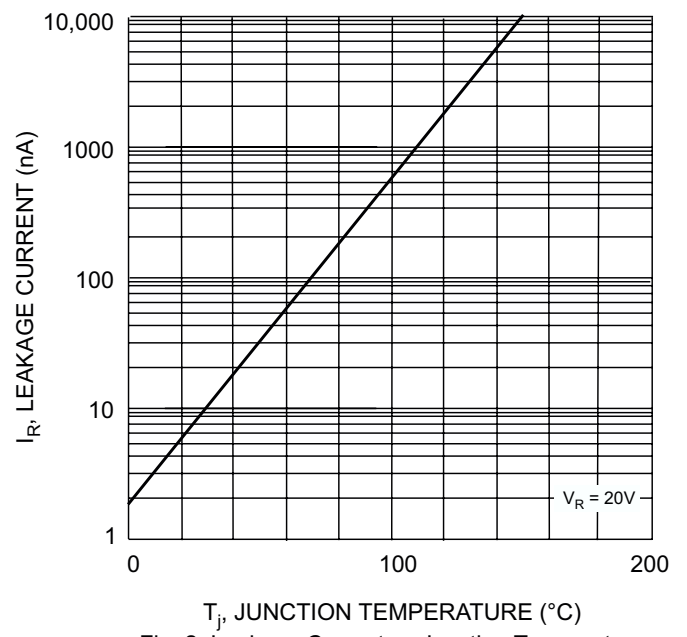


Fig. 2 Leakage Current vs Junction Temperature



Micro Commercial Components

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

*****APPLICATIONS DISCLAIMER*****

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.