


8 7 6 5 4 3 2 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

RoHS Compliant

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	1/25/10	D.GRIFFIN
B	ECN 5868: ADDED LENGTH 075 M, REVISED 03M TO .98	12/7/11	D.FRISIELLO
C	ECN 6320: ADDED NEW L-COM LOGO	8/3/12	D.FRISIELLO
D	ECN6237: ADDED CONTACT PLATING NOTE. UPDATED FORMAT.	09/14/12	DFP

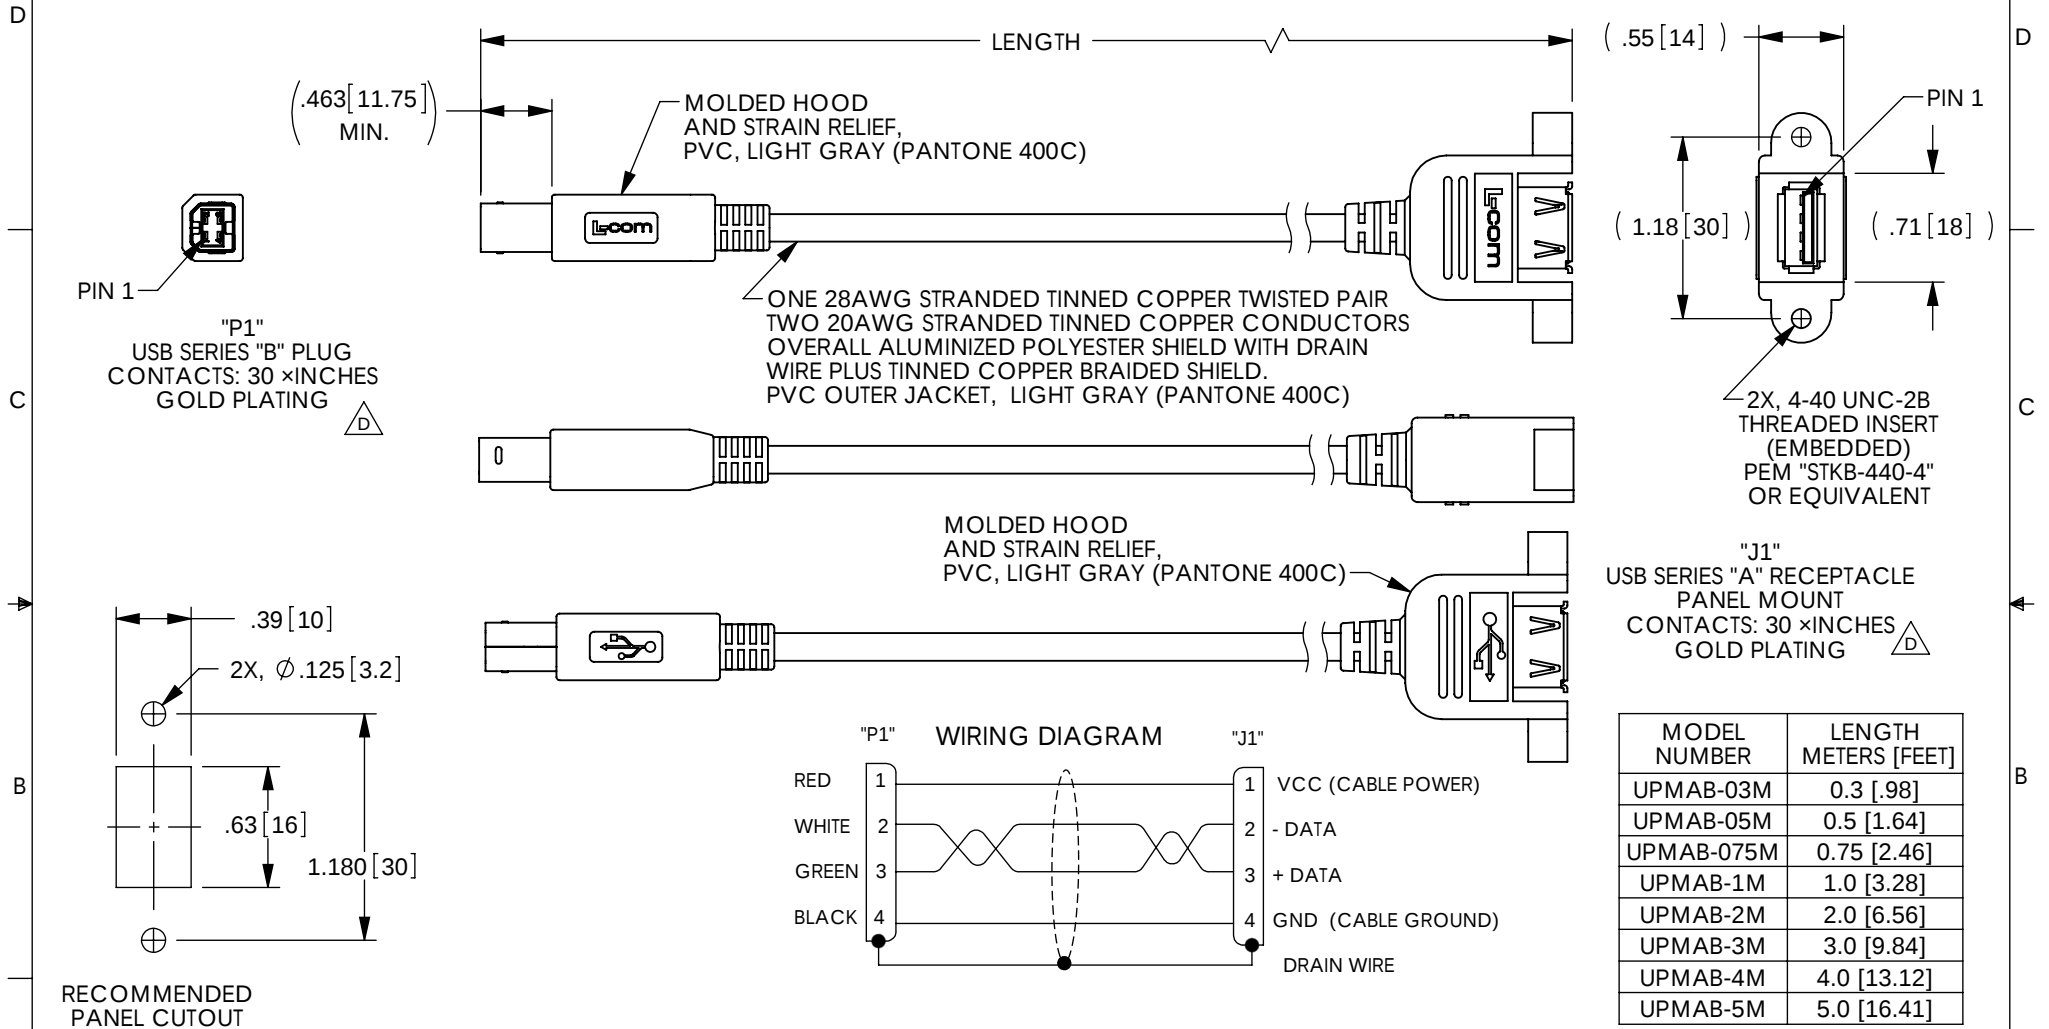

- NOTES:
1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
 2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
 3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 4. MOUNTING HARDWARE INCLUDED: 2X #4-40 X .38 LG. PHILLIPS HD SCREW
 5. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: 012 [305] = +1 [25] / -0 >12 [305] 060 [1524] = +2 [51] / -0 >60 [1524] 0120 [3048] = +4 [102] / -0 >120 [3048] 0300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS DRAWN BY D. PARHAM CHECKED BY D. CASTRO APPROVED BY S. SMITH	DATE 01/04/2010 01/12/2010 01/13/2010	L-com® Global Connectivity 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
ALL OTHER DIMENSIONAL TOLERANCES: .X = 0.2 .XX = 0.02 .XXX = 0.005	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	CATEGORY USB	
PROJECTION 	COLOR VARIATIONS MAY OCCUR	PRODUCT DESCRIPTION CA USB-A PNL/USB-BM	
SIZE A	FSCM NO. 43321	DWG. NO. UPMAB	
SCALE: NONE	CAD FILE: UPMAB.SLDDRW	REV. D	
		SHEET 1 OF 1	