



Surface Mount Schottky Barrier Diodes


multicompPRO



BAS70



BAS70-05



SOT-23

Features:

- Low Turn-On Voltage
- Fast Switching
- PN Junction Guard Ring for Transient And BAS70 BAS70-04 ESD Protection
- Ultra-Small Surface Mount Package
- Also Available in Lead Free Version

Applications:

- High speed switching applications.
- Circuit protecting : SOT-23
- Voltage clamping

Maximum Ratings:

$T_A = 25^{\circ}\text{C}$ unless otherwise specified.

Characteristic	Symbol	Limits	Unit
RMS reverse voltage	$V_{R(RMS)}$	49	V
Repetitive peak reverse voltage Working peak reverse voltage Diode reverse voltage	V_{RRM} V_{RWM} V_R	70	V
Forward continuous current	I_F	70	mA
Non-Repetitive peak forward surge current at $t_p < 1\text{s}$	I_{FSM}	100	mA
Power dissipation	P_D	200	mW
Thermal resistance, junction to ambient air	$R_{\theta JA}$	625	$^{\circ}\text{C/W}$
Junction and storage temperature range	T_j, T_{stg}	-65 to +150	$^{\circ}\text{C}$

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicompPRO

Electrical Characteristics:

$T_A = 25^\circ\text{C}$ unless otherwise specified.

Characteristic	Symbol	Test conditions	Min.	Max.	Unit
Reverse breakdown voltage	$V_{(BR)R}$	$I_{(BR)} = 10\mu\text{A}$	70	-	V
Reverse leakage current	I_R	$t_P < 300\mu\text{s}$, $V_R = 50\text{V}$	-	100	nA
Forward voltage	V_F	$t_P < 300\mu\text{s}$, $I_F = 1\text{mA}$ $t_P < 300\mu\text{s}$, $I_F = 15\text{mA}$	-	410 1,000	mV
Junction capacitance	C_j	$V_R = 0\text{V}$, $f = 1\text{MHz}$	-	2	pF
Reverse recovery time	t_{rr}	$I_F = I_R = 10\text{mA}$ to $I_R = 1\text{mA}$, $R_L = 100\Omega$	-	5	nS

Typical Characteristics:

$T_A = 25^\circ\text{C}$ unless otherwise specified.

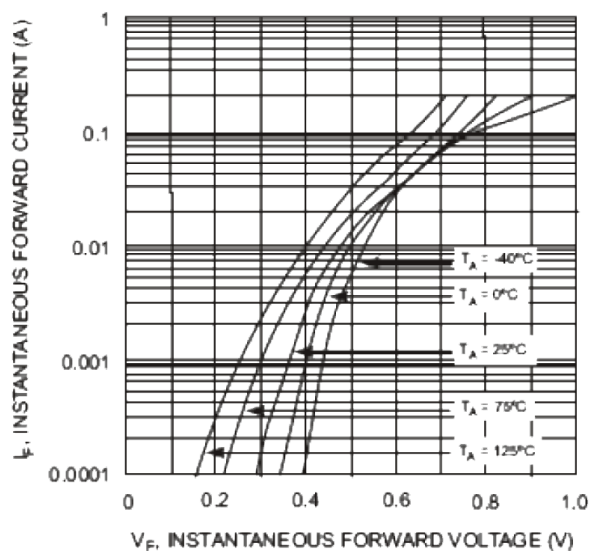


Fig. 1 Typical Forward Voltage



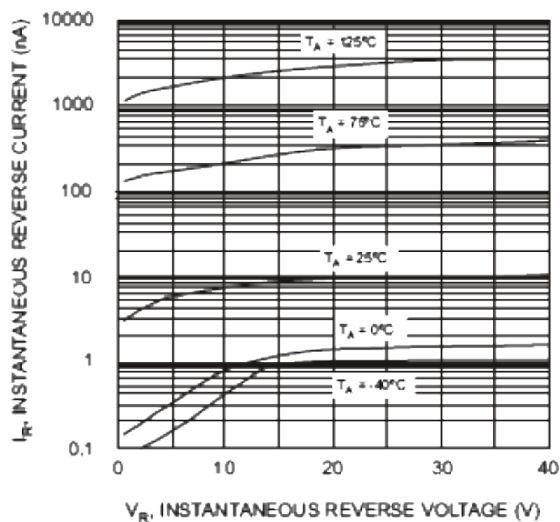


Fig. 2 Typical Reverse Characteristics


Surface Mount Schottky Barrier Diodes

multicompPRO

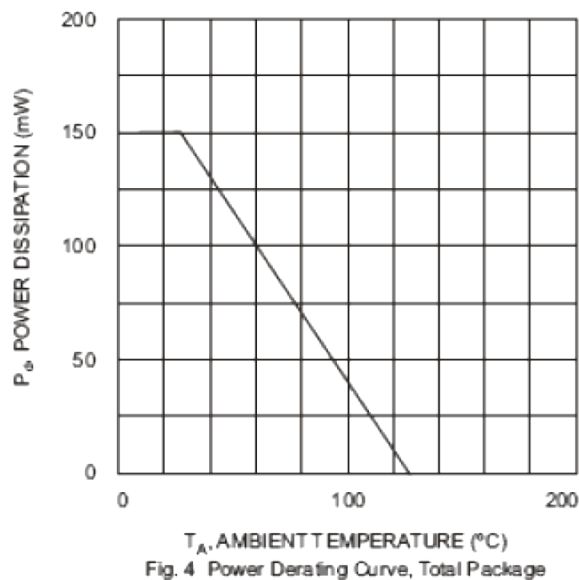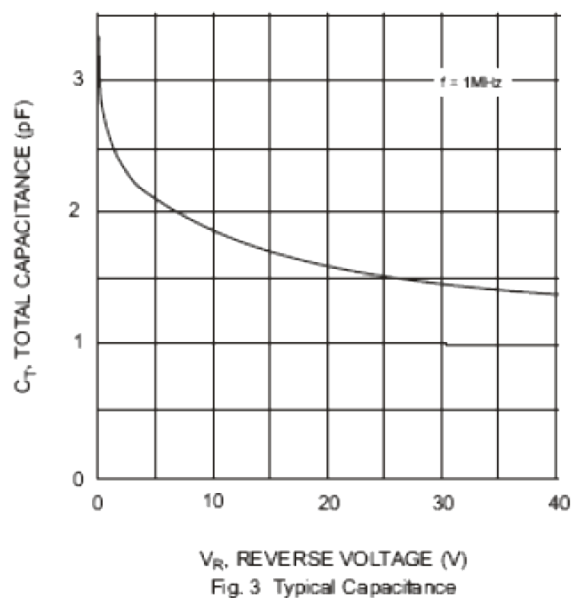

Package Outline:

Plastic surface mounted package

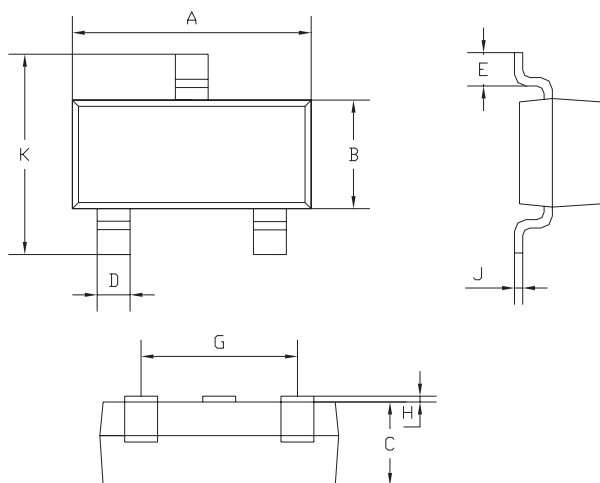


SOT-23		
Dim.	Min.	Max.
A	2.85	2.95
B	1.25	1.35
C	1 Typ.	
D	0.37	0.43
E	0.35	0.48
G	1.85	1.95
H	0.02	0.1
J	0.1 Typ.	
K	2.35	2.45

Dimensions : Millimetres

Surface Mount Schottky Barrier Diodes

multicompPRO

Soldering Footprint:

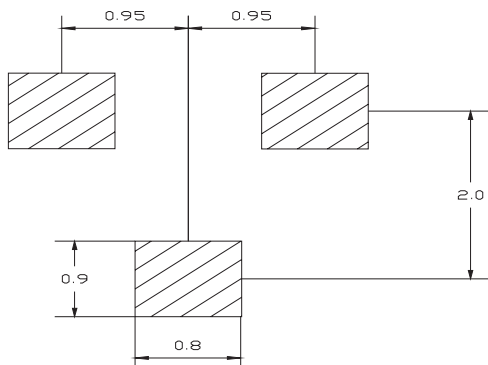

Dimensions : Millimetres

Package Information:

Device	Package	Shipping
BAS70-05-7-F BAS70-7-F	SOT-23	3,000 / Tape & Reel

Part Number Table

Description	Part Number
Surface Mount Schottky Barrier Diodes	BAS70-05-7-F
	BAS70-7-F

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicompPRO