


## low profile rectangular RFI shielding gaskets

WITH VERY HIGH BOND PRESSURE SENSITIVE ADHESIVE MOUNTING. Three sizes offer very low relaxed and compressed heights. Available in popular CuNi conductive metalized surface for most applications. Low profile with very low compression force required.

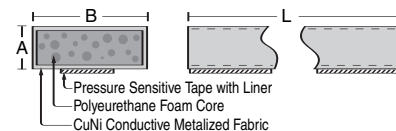

| PART No.     | Conductive Surface | Surface Resistivity   | A    |     | B    |     | Length |      |
|--------------|--------------------|-----------------------|------|-----|------|-----|--------|------|
| SG060125R-24 | CuNi               | 0.005 - 0.010Ω/lin.in | .060 | 1,2 | .125 | 3,2 | 24.0   | 610  |
| SG060125R-48 | CuNi               | 0.005 - 0.010Ω/lin.in | .060 | 1,2 | .125 | 3,2 | 48.0   | 1220 |
| SG125250R-24 | CuNi               | 0.005 - 0.010Ω/lin.in | .125 | 3,2 | .250 | 6,4 | 24.0   | 610  |
| SG125250R-48 | CuNi               | 0.005 - 0.010Ω/lin.in | .125 | 3,2 | .250 | 6,4 | 48.0   | 1220 |
| SG187375R-24 | CuNi               | 0.005 - 0.010Ω/lin.in | .187 | 4,7 | .375 | 9,5 | 24.0   | 610  |
| SG187375R-48 | CuNi               | 0.005 - 0.010Ω/lin.in | .187 | 4,7 | .375 | 9,5 | 48.0   | 1220 |