

## Printed-circuit board connector - MSTBA 2,5/ 6-G-5,08-LR - 1809115

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Header, Nominal current: 12 A, Rated voltage (III/2): 320 V, Number of positions: 6, Pitch: 5.08 mm, Color: green, Contact surface: Tin, Mounting: Wave soldering



The figure shows a 5-pos. version of the product

### Why buy this product

- ✓ Maximum flexibility when it comes to device design – one header for connectors with different connection technologies
- ✓ Well-known mounting principle allows worldwide use
- ✓ Automatic locking and intuitive release through Lock and Release operating lever in contrasting color
- ✓ Closed contour for optimum stability of the plug-in connection



### Key Commercial Data

|                                      |                                                                                                         |
|--------------------------------------|---------------------------------------------------------------------------------------------------------|
| Packing unit                         | 50 STK                                                                                                  |
| Minimum order quantity               | 50 STK                                                                                                  |
| GTIN                                 | <br>4 046356 702560 |
| GTIN                                 | 4046356702560                                                                                           |
| Weight per Piece (excluding packing) | 3.190 g                                                                                                 |
| Custom tariff number                 | 85366990                                                                                                |
| Country of origin                    | Germany                                                                                                 |
| Note                                 | Made to Order (non-returnable)                                                                          |

### Technical data

#### Dimensions

|                          |         |
|--------------------------|---------|
| Length                   | 12 mm   |
| Pitch                    | 5.08 mm |
| Dimension a              | 25.4 mm |
| Constructional height    | 8.6 mm  |
| Height                   | 11.9 mm |
| Length of the solder pin | 3.3 mm  |

# Printed-circuit board connector - MSTBA 2,5/ 6-G-5,08-LR - 1809115

## Technical data

### Dimensions

|                |          |
|----------------|----------|
| Pin dimensions | 1 x 1 mm |
| Hole diameter  | 1.4 mm   |

### General

|                                        |                    |
|----------------------------------------|--------------------|
| Range of articles                      | MSTBA 2,5/...-G-LR |
| Insulating material group              | IIIa               |
| Rated surge voltage (III/3)            | 4 kV               |
| Rated surge voltage (III/2)            | 4 kV               |
| Rated surge voltage (II/2)             | 4 kV               |
| Rated voltage (III/3)                  | 250 V              |
| Rated voltage (III/2)                  | 320 V              |
| Rated voltage (II/2)                   | 400 V              |
| Connection in acc. with standard       | EN-VDE             |
| Nominal current $I_N$                  | 12 A               |
| Maximum load current                   | 12 A               |
| Insulating material                    | PBT                |
| Flammability rating according to UL 94 | V0                 |
| Color                                  | green              |
| Number of positions                    | 6                  |

### Standards and Regulations


|                                        |        |
|----------------------------------------|--------|
| Connection in acc. with standard       | EN-VDE |
|                                        | CUL    |
| Flammability rating according to UL 94 | V0     |

### Environmental Product Compliance


|            |                                                         |
|------------|---------------------------------------------------------|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

## Drawings

Drilling diagram



Dimensional drawing

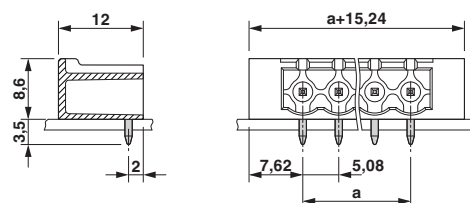

## Printed-circuit board connector - MSTBA 2,5/ 6-G-5,08-LR - 1809115

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27141190 |
| eCl@ss 6.0 | 27260704 |
| eCl@ss 7.0 | 27440402 |
| eCl@ss 8.0 | 27440402 |
| eCl@ss 9.0 | 27440402 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002637 |
| ETIM 5.0 | EC002637 |
| ETIM 6.0 | EC002637 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211810 |
| UNSPSC 7.0901 | 39121409 |
| UNSPSC 11     | 39121409 |
| UNSPSC 12.01  | 39121409 |
| UNSPSC 13.2   | 39121409 |

### Approvals

#### Approvals

#### Approvals

cULus Recognized / EAC

#### Ex Approvals

#### Approval details

|                                                                                                                                                                                                                                                                            |       |       |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-------|
| cULus Recognized  <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> E60425-19931011 |       |       |
|                                                                                                                                                                                                                                                                            | B     | D     |
| Nominal current I <sub>N</sub>                                                                                                                                                                                                                                             | 15 A  | 10 A  |
| Nominal voltage U <sub>N</sub>                                                                                                                                                                                                                                             | 300 V | 300 V |

## Printed-circuit board connector - MSTBA 2,5/ 6-G-5,08-LR - 1809115

### Approvals

EAC



B.01742

### Accessories

#### Accessories

#### Coding element

Coding star - CR-MSTB - 1734401



Coding section, inserted into the recess in the header or the inverted plug, red insulating material

#### Filler plug

Accessories - MSTB-BL - 1755477



Keying cap, for forming sections, plugs onto header pin, green insulating material

#### Labeled terminal marker

Marker card - SK 5,08/3,8:FORTL.ZAHLEN - 0804293



Marker card, Card, white, labeled, Horizontal: Consecutive numbers 1 - 10, 11 - 20, etc. up to 91 - (99)100, Mounting type: Adhesive, for terminal block width: 5.08 mm, Lettering field: 5.08 x 3.8 mm