




# IDEALPOWER

experts in power conversion

Ideal Power Ltd Product Specification Document

|              |                    |
|--------------|--------------------|
| Description  | Ext. PSU           |
| Model Number | 25HK-AB-150A200-CP |
| Revision     | A1                 |
| Notes        | -                  |

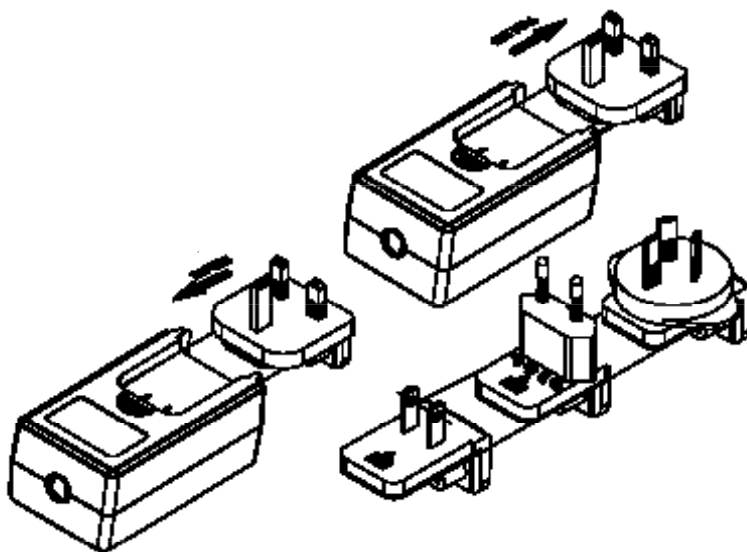

| CUSTOMER APPROVED SIGNATURES |  |  | VENDOR APPROVED SIGNATURES |  |  |
|------------------------------|--|--|----------------------------|--|--|
|                              |  |  |                            |  |  |

## Ideal Power Ltd

Ideal Power, Ideal House, Tree Beech Enterprise Park, Gunn, Barnstaple, Devon, EX32 7NZ, England, UK

Tel: +44 (0) 845 260 3400

Email: sales@idealphpower.co.uk

Web: www.idealpower.co.uk

Page 1 of 12

## CONTENTS

INTRODUCTION

INPUT REQUIREMENTS

OUTPUT REQUIREMENTS

EFFICIENCY

LINE REGULATION

HOLD UP TIME

TURN ON TIME

TEMPERATURE COEFFICIENT

DIELECTRIC STRENGTH (Hi-Pot) TEST

INSULATION RESISTANCE

PROTECTION

ENVIRONMENTAL CONDITIONS

EMI/ EMC

RELIABILITY AND QUALITY CONTROL

SAFETY

OVERALL DRAWING

USE SPECIFICATION

PACKING

MARKING

## 1.0 INTRODUCTION

This document specifies a switching power supply with a output of +15V, and electronic process. The switching power supply will provide power for technology equipments including electrical business equipment. The adaptor meets the requirement of lead free and RoHS.

## 2.0 INPUT REQUIREMENTS

2.1 Input Voltage Range: 100(-10%)VAC to 240(+10%)VAC

2.2 Input Frequency Range: 47 Hz to 63 Hz

2.3 Input Power Consumption at no-load : 0.3W Max

2.4 Input In-rush Current: 50A Max

2.5 Input Current: 0.8A Max

## 3.0 OUTPUT REQUIREMENTS

3.1 Output Voltage: +15V

3.2 Output Regulation: 14.25-15.75V

3.3 Output Load Range: 2.0A

3.4 Output Ripple & Noise: 120mV Max @20MHz bandwidth with  
10UF/50V capacitance and 104/50V ceramic capacitor.

4.0 EFFICIENCY:  $\geq 83.62\%$  @ average of 25/50/75/100% loads 115V&230VAC input

5.0 LINE REGULATION:  $\pm 2\%$  maximum

6.0 HOLD UP TIME: 10ms Min at 110VAC full load.

7.0 TURN ON TIME: 2S Max at 110VAC full load.

8.0 TEMPERATURE COEFFICIENT: 0.05%/°C

9.0 DIELECTRIC STRENGTH (Hi-Pot) TEST

9.1 Primary to Secondary :AC 3000Vrms, 4 mA , 1 minute for type test, 2 second for production test.

10.0 INSULATION RESISTANCE

Primary to secondary: 50M OHM to 500VDC.

11.0 PROTECTION

11.1 Input Protection

The switching power supply has a 2 Amps inner current fuse to protect itself.

11.2 Output Protection

11.2.1 Output Current:

Overload conditions shall decrease the output voltage. Removal of an output overload shall provide automatic recovery for the output voltage.

11.2.2 Short Circuit Protection: Auto Recovery.

## 12.0 ENVIRONMENTAL CONDITIONS

The switching power supply can withstand the following environmental conditions:

12.1 Storage Temperature: -20°C ~ +70 °C

Relative Humidity: 10% ~ 95%

12.2 Operation Temperature: 0°C ~ 40°C

Relative Humidity: 10% ~ 95%

## 13.0 EMI / EMC

The switching power supply has approved by the following standards:

FCC PART 15B AS/NZS 55022/55024 J55022(H20)  
(1)EN55022(EN61000-3-2.EN61000-3-3)  
(2)EN55024(IEC61000-4-2.IEC61000-4-3.IEC61000-4-4.  
IEC61000-4-6.IEC61000-4-8.IEC61000-4-11.)

## 14.0 RELIABILITY AND QUALITY CONTROL

### 14.1 Burn-in

The burn-in test will be performed at least 2 hours at 40 centigrade degrees under full load condition.

### 14.2 MTBF

When the operation is complying with this specification, the switching power supply's MTBF will be 50,000 hours at 25 centigrade degrees.

## 15.0 SAFETY

The switching power supply has approved by the following safety standards:


UL60950-1 2nd Edition ,2007-03-27 CSA C22.2 NO.60950-1-07,  
2nd Edition.2007-03 EN 60950-1:2006+A11+A1+A12  
BS EN60950-1:2006+A1+A12 AS/NZS 60950.1:2011

技術基準 省令第2項 : J60950(H19), J55022(H20), J3000(H21)


Technical Requirements Clause 2: J60950 (H19): 2007, J55022 (H20): 2008, J3000 (H21): 2009

## 16. OVERALL DRAWING


UNIT: mm

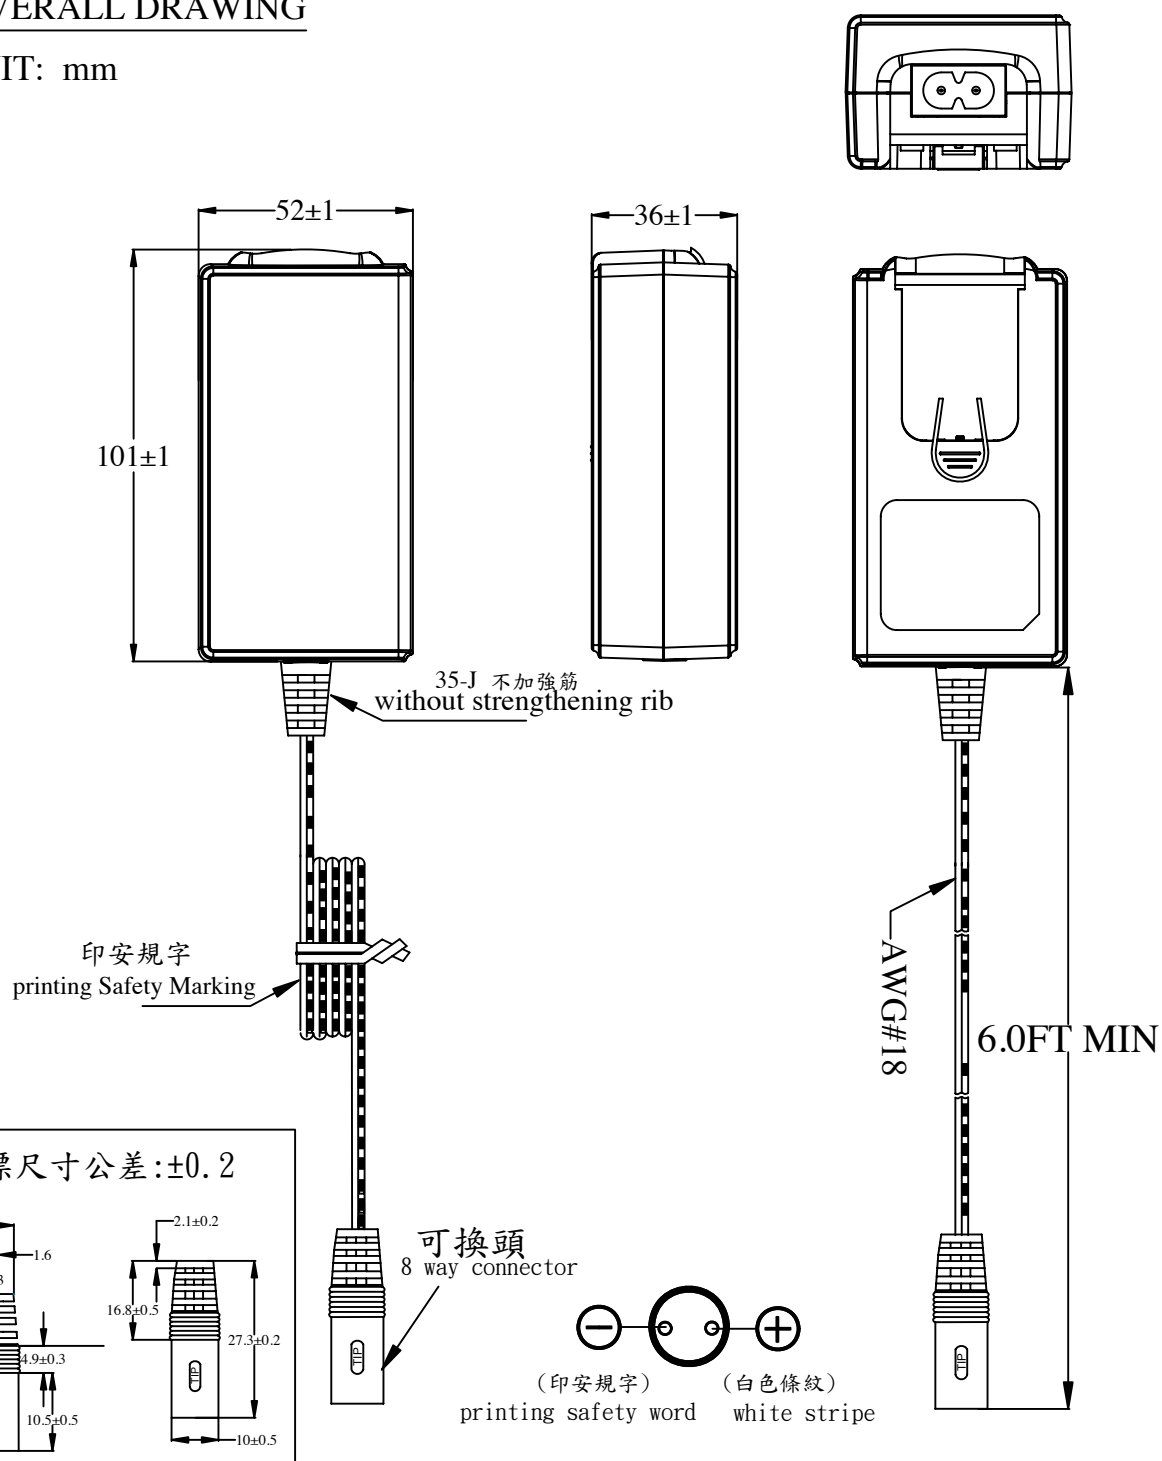

UNIT: mm

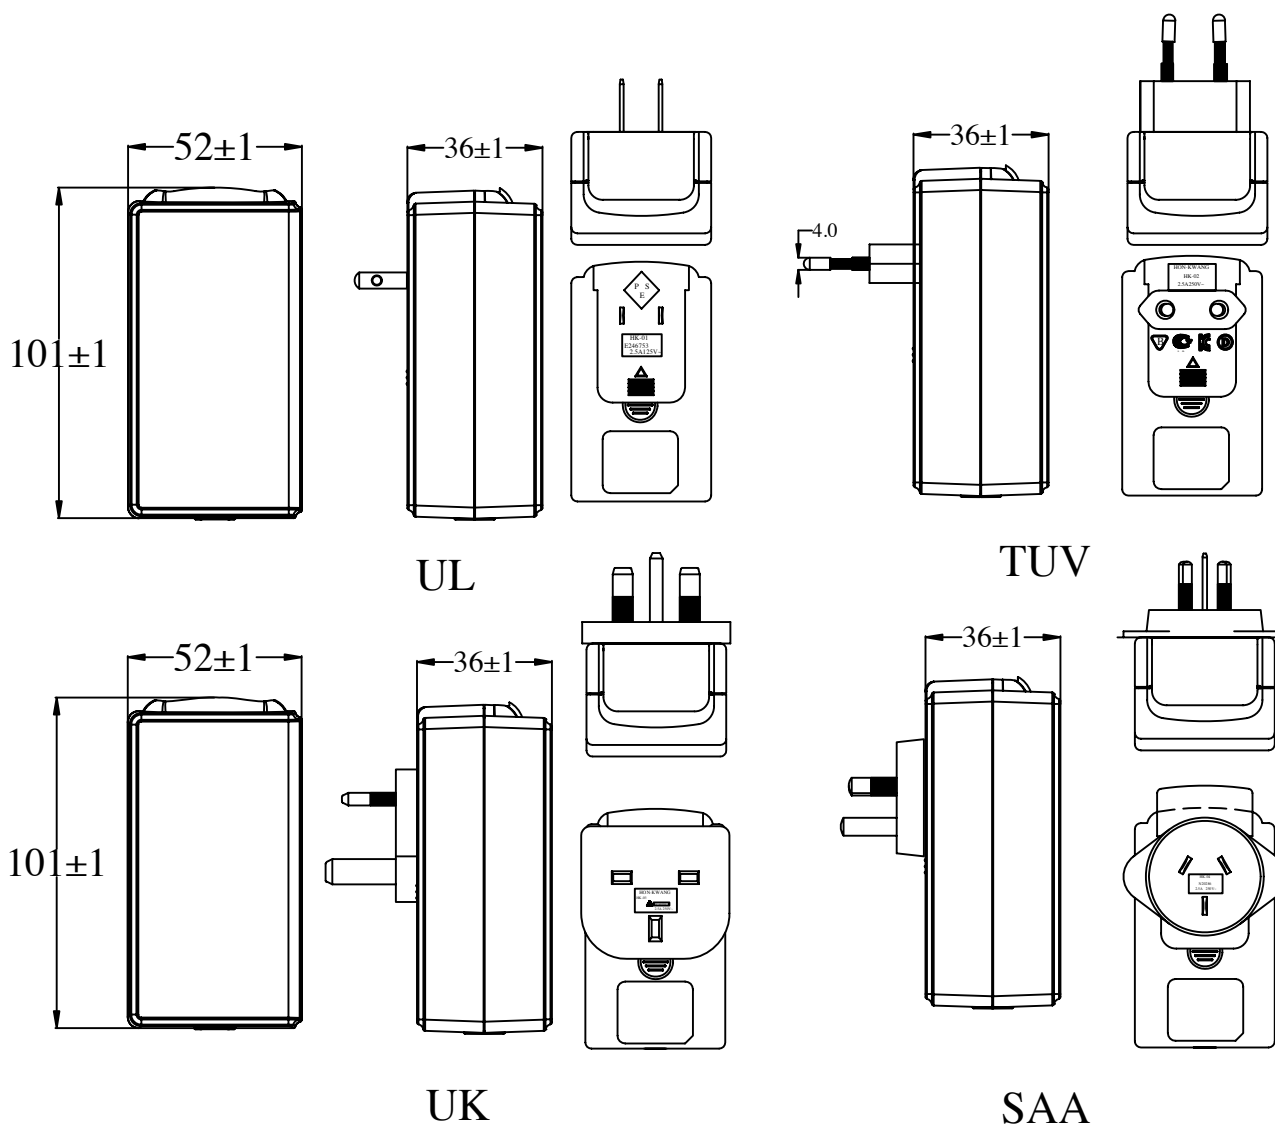


UNIT: mm

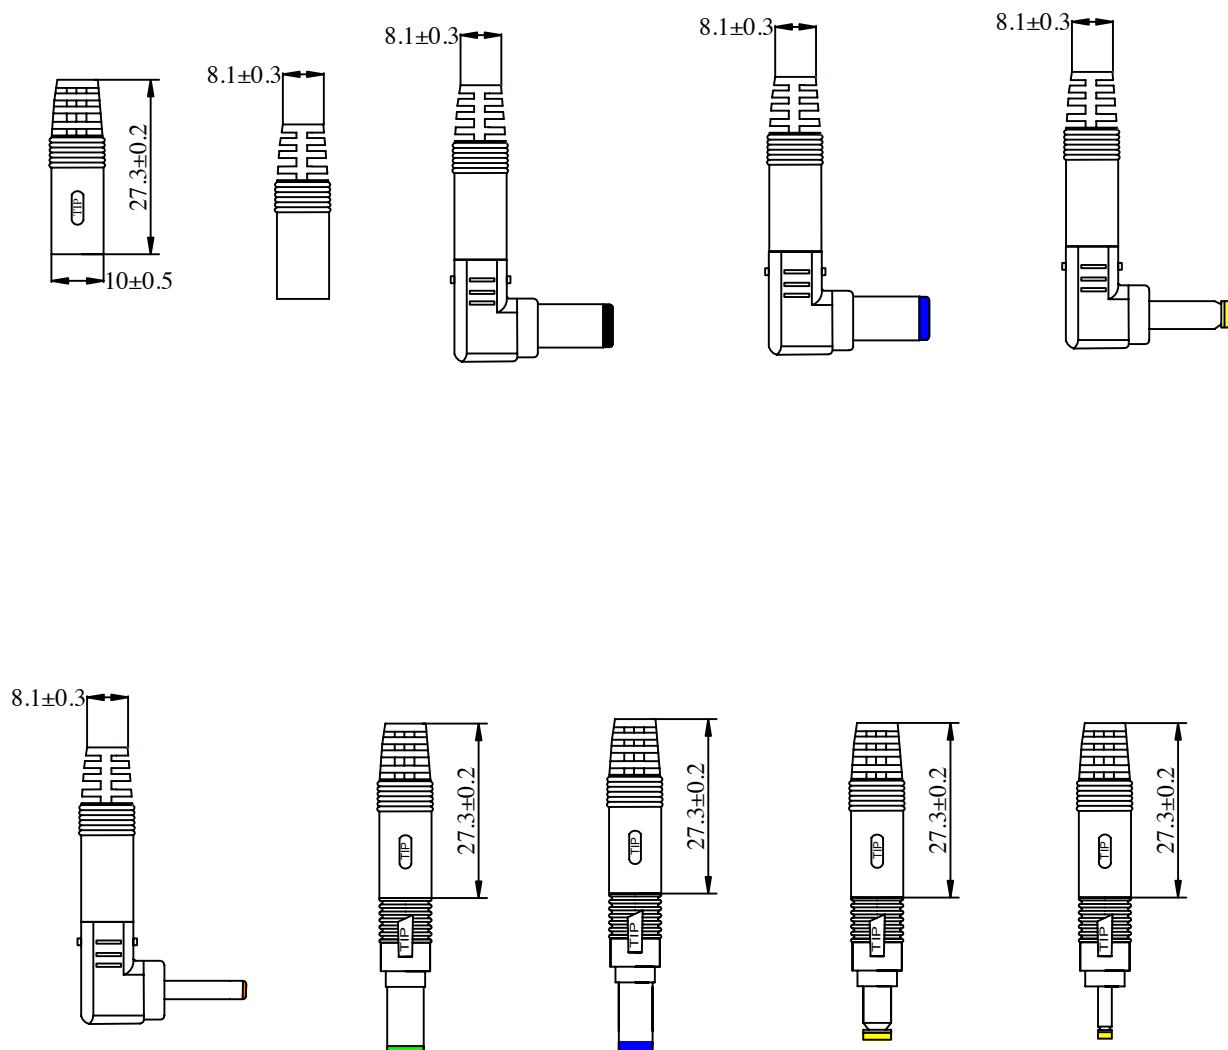

## 17. USE SPECIFICATION

### WARNING!

Please don't insert article alone at the wall.

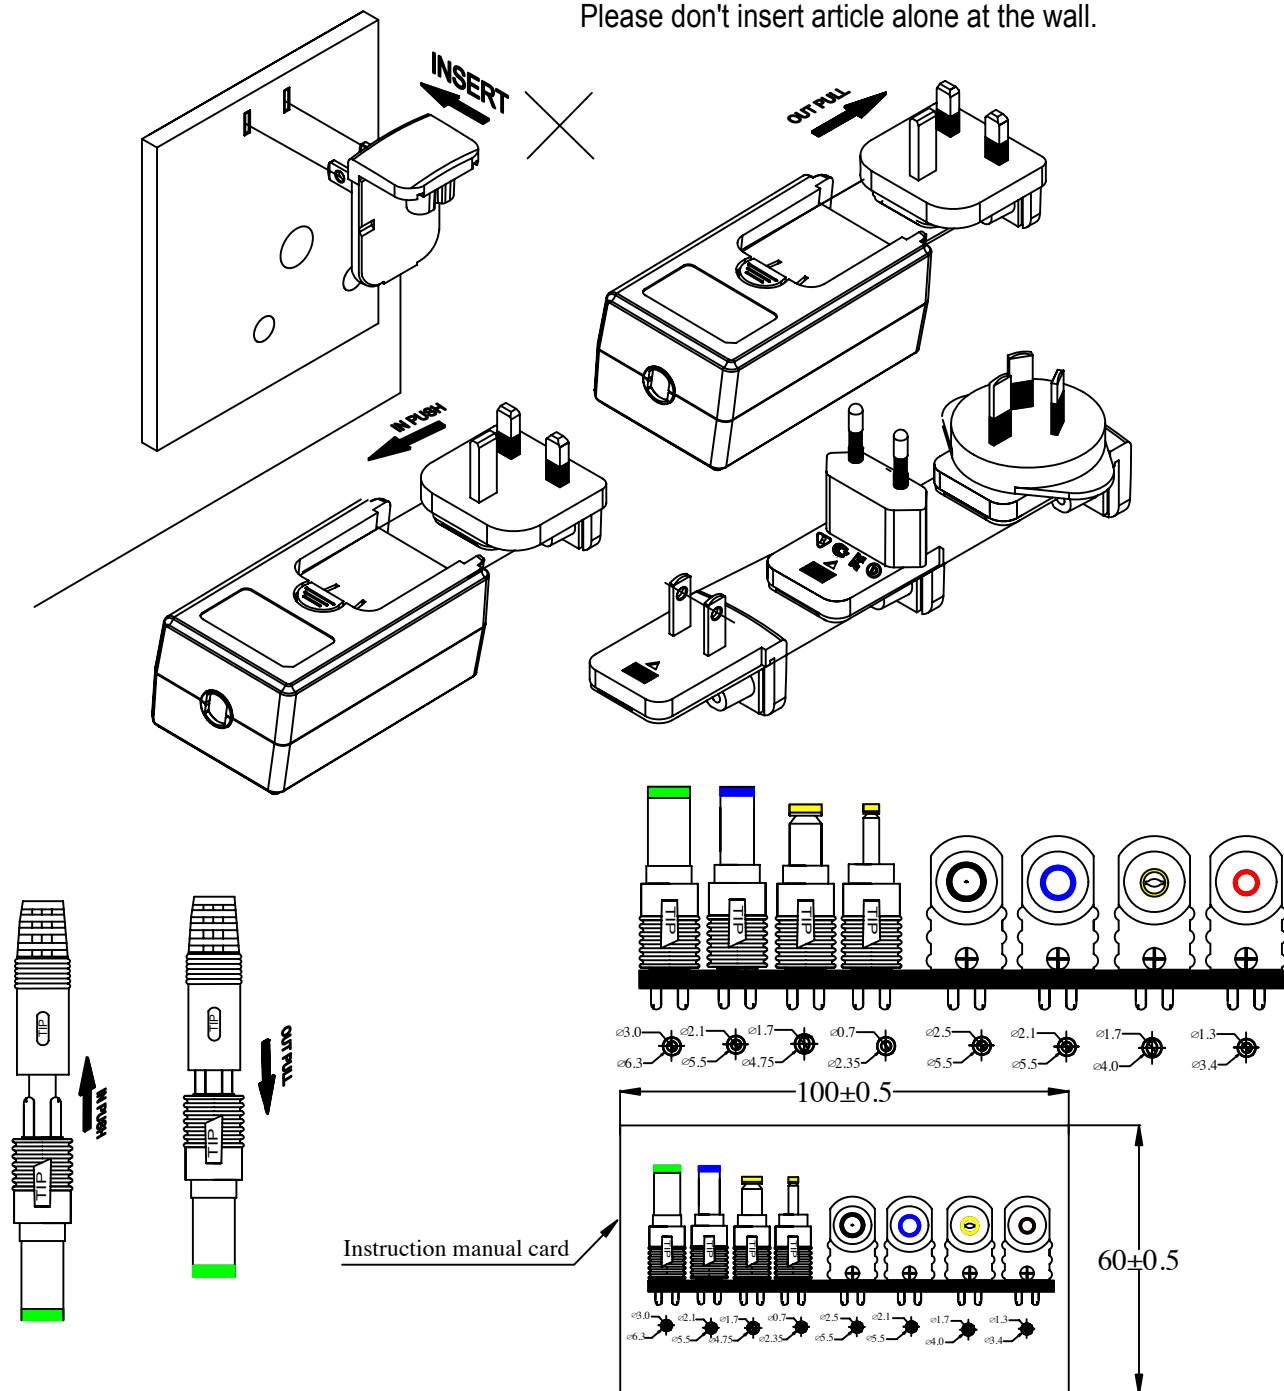

## 17. PACKING

### 17.1 Inner Box

UNIT: mm

BOX( ☒ Normal BOX ☐ Corrugated BOX)

Length:145

Width:75


Height:65

Label: 1

|                        |   |
|------------------------|---|
| 24                     |   |
| P/N:25HK-AB-150A200-CP | 6 |

Label: 2

|      |   |
|------|---|
| 24   |   |
| RoHS | 6 |

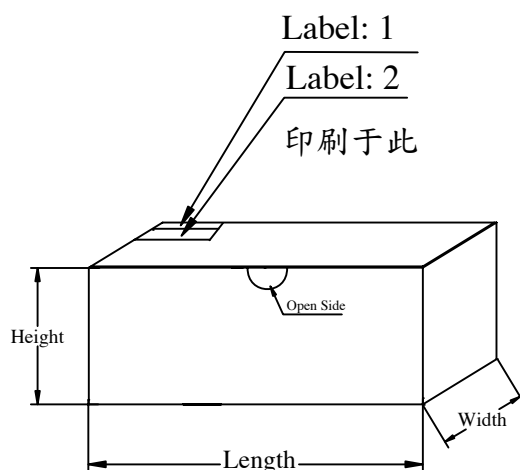

Material:A 卡400磅(0.53t)White


### NOTICE:

Its probably different from the white box of the sample and the figure dimension.  
 The white box is used to pack during product.

## 17. PACKING

### 17.2 Carton

UNIT: mm

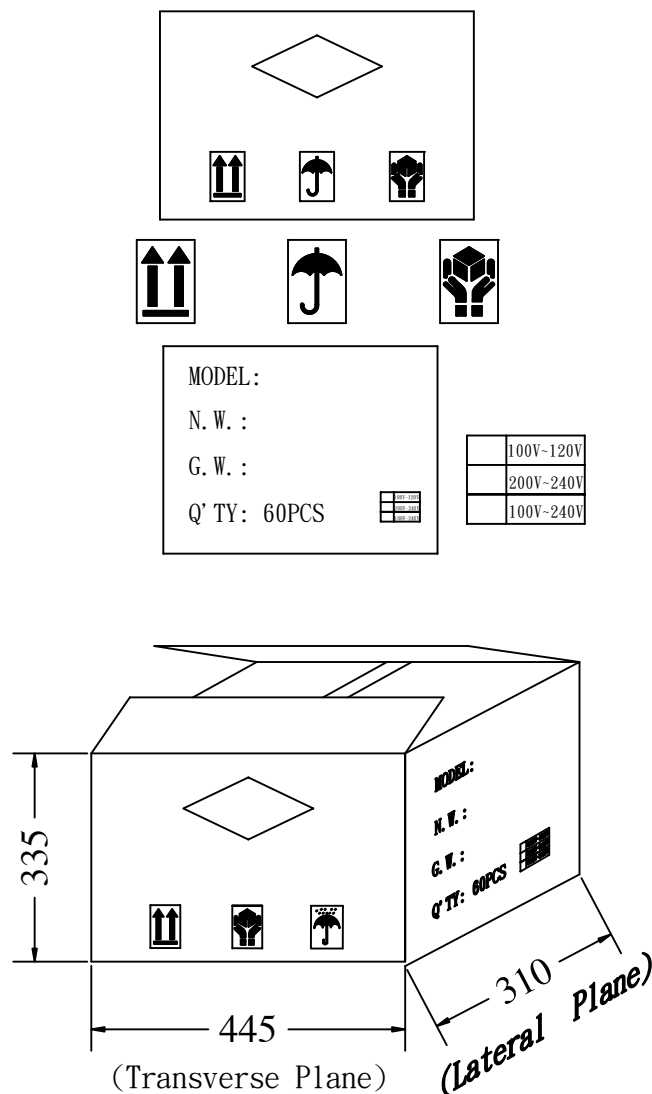

## 18. MARKING

200# CPC 合成紙+上光 NAME-PLATE: WHITE CHARACTERS BLACK BACKGROUND.

UNIT: mm

MMYYC  
month year  
made in China  
by Hon-kwang

