


PX SERIES

105°C Standard

◆FEATURES

•RoHS compliance.

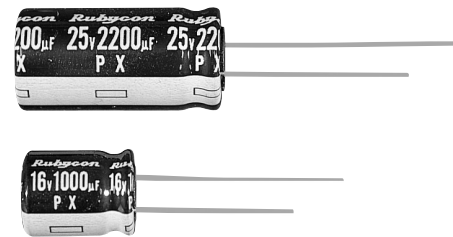

◆SPECIFICATIONS

Items	Characteristics																																																														
Category Temperature Range	-55~+105℃					-40~+105℃					-25~+105℃																																																				
Rated Voltage Range	6.3~100Vdc					160~400Vdc					450Vdc																																																				
Capacitance Tolerance	±20%(20℃, 120Hz)																																																														
Leakage Current(MAX)	6.3~100Vdc										160~450Vdc																																																				
	I=0.01CV or 3μA whichever is greater. (After 2 minutes application of rated voltage)										CV≤1000			CV>1000																																																	
											I=0.1CV+40μA (1minute) I=0.03CV+15μA (5minutes)			I=0.04CV+100μA (1minute) I=0.02CV+25μA (5minutes)																																																	
	I=Leakage Current(μA)					C=Capacitance(μF)					V=Rated Voltage(Vdc)																																																				
(tanδ) Dissipation Factor(MAX)	<table><tr><td>Rated Voltage (Vdc)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>100</td><td>160</td><td>200</td><td>250</td><td>350</td><td>400</td><td>450</td><td>(20℃, 120Hz)</td></tr><tr><td>tanδ</td><td>0.28</td><td>0.24</td><td>0.20</td><td>0.16</td><td>0.14</td><td>0.12</td><td>0.10</td><td>0.08</td><td>0.20</td><td>0.20</td><td>0.20</td><td>0.25</td><td>0.25</td><td>0.25</td><td></td></tr></table> When capacitance is over 1000μF, tanδ shall be added 0.02 to the listed value with increase of every 1000μF.															Rated Voltage (Vdc)	6.3	10	16	25	35	50	63	100	160	200	250	350	400	450	(20℃, 120Hz)	tanδ	0.28	0.24	0.20	0.16	0.14	0.12	0.10	0.08	0.20	0.20	0.20	0.25	0.25	0.25																	
Rated Voltage (Vdc)	6.3	10	16	25	35	50	63	100	160	200	250	350	400	450	(20℃, 120Hz)																																																
tanδ	0.28	0.24	0.20	0.16	0.14	0.12	0.10	0.08	0.20	0.20	0.20	0.25	0.25	0.25																																																	
Endurance	After applying rated voltage with rated ripple current for specified time at 105℃, the capacitors shall meet the following requirements. <table><tr><td>Capacitance Change</td><td>Within ±25% of the initial value.</td><td>Case Size</td><td>Life Time (hrs)</td></tr><tr><td>Dissipation Factor</td><td>Not more than 200% of the specified value.</td><td>φD≤8</td><td>1000</td></tr><tr><td>Leakage Current</td><td>Not more than the specified value.</td><td>φD≥10</td><td>2000</td></tr></table>															Capacitance Change	Within ±25% of the initial value.	Case Size	Life Time (hrs)	Dissipation Factor	Not more than 200% of the specified value.	φD≤8	1000	Leakage Current	Not more than the specified value.	φD≥10	2000																																				
Capacitance Change	Within ±25% of the initial value.	Case Size	Life Time (hrs)																																																												
Dissipation Factor	Not more than 200% of the specified value.	φD≤8	1000																																																												
Leakage Current	Not more than the specified value.	φD≥10	2000																																																												
Low Temperature Stability Impedance Ratio(MAX)	<table><tr><td>Rated Voltage (Vdc)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>100</td><td>160</td><td>200</td><td>250</td><td>350</td><td>400</td><td>450</td><td>(120Hz)</td></tr><tr><td>Z(-25℃)/Z(20℃)</td><td>5</td><td>4</td><td>3</td><td>2</td><td>2</td><td>2</td><td>2</td><td>2</td><td>3</td><td>3</td><td>4</td><td>6</td><td>6</td><td>7</td><td></td></tr><tr><td>Z(-40℃)/Z(20℃)</td><td>10</td><td>8</td><td>6</td><td>4</td><td>3</td><td>3</td><td>3</td><td>3</td><td>4</td><td>4</td><td>8</td><td>8</td><td>10</td><td>-</td><td></td></tr></table>															Rated Voltage (Vdc)	6.3	10	16	25	35	50	63	100	160	200	250	350	400	450	(120Hz)	Z(-25℃)/Z(20℃)	5	4	3	2	2	2	2	2	3	3	4	6	6	7		Z(-40℃)/Z(20℃)	10	8	6	4	3	3	3	3	4	4	8	8	10	-	
Rated Voltage (Vdc)	6.3	10	16	25	35	50	63	100	160	200	250	350	400	450	(120Hz)																																																
Z(-25℃)/Z(20℃)	5	4	3	2	2	2	2	2	3	3	4	6	6	7																																																	
Z(-40℃)/Z(20℃)	10	8	6	4	3	3	3	3	4	4	8	8	10	-																																																	

◆MULTIPLIER FOR RIPPLE CURRENT


Frequency (Hz)		60(50)	120	500	1k	10k≤
Coefficient	0.47~1μF	0.50	1.00	1.20	1.30	1.50
	2.2~4.7μF	0.65	1.00	1.20	1.30	1.50
	10~47μF	0.80	1.00	1.20	1.30	1.50
	100~1000μF	0.80	1.00	1.10	1.15	1.20
	2200~33000μF	0.80	1.00	1.05	1.10	1.15

◆OPTION

	Code
PET Sleeve	EFC

◆DIMENSIONS

(mm)

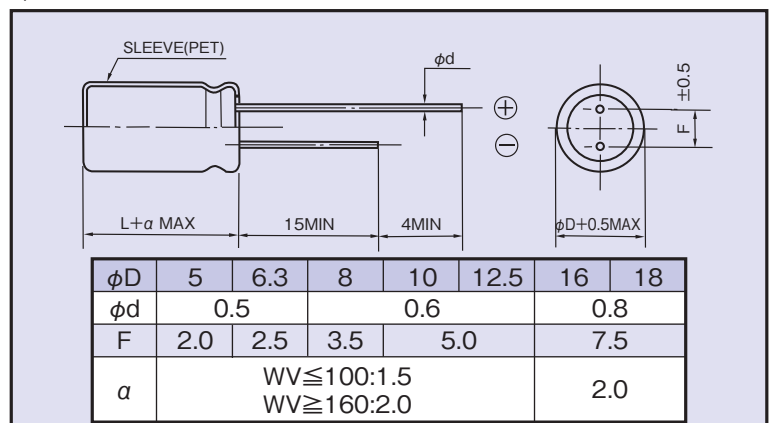

◆PART NUMBER

□□□	PX	□□□□□	M	□□□	□□	D×L
Rated Voltage	Series	Capacitance	Capacitance Tolerance	Option	Lead Forming	Case Size

◆ **STANDARD SIZE**

Size $\phi D \times L$ (mm), Rated Ripple Current (mA r.m.s./105°C, 120Hz)[illegible][illegible]