

GX-M SERIES

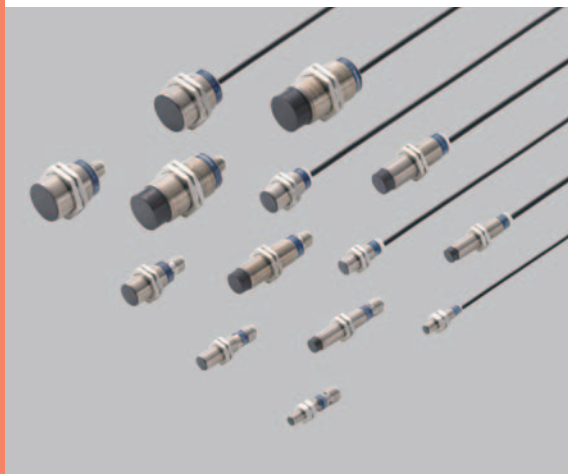
Related Information

■ General terms and conditions..... F-7

■ Sensor selection guide P.803~

■ Glossary of terms..... P.1482~

■ General precautions P.1485~


panasonic.net/id/pidsx/global
Conforming to
EMC DirectiveListing
(2 m cable length type only)**Features**• **Wide product range**

Types: DC 3-wire shielded type
DC 3-wire non-shielded type
DC 2-wire standard type
DC 2-wire long range type

Size: M8, M12, M18, M30**Connector:** 2 m cable length type

M12 plug-in connector type





M12 pigtailed type (DC 2-wire

M8 type only)

• **Strong resistance IP68 (GX-M8□: IP67)**2-wire type
availablePNP output
type available

Oil resistant

Metal embedding
possible**Wide variations****ORDER GUIDE****DC 3-wire type (2 m cable length type)**

Type		Appearance	Sensing range (Note 1, 2)	Model No.		Output operation
				NPN output	PNP output	
Shielded	M8		Max. operation distance: 1.5 mm 0.06 in (Stable sensing range 0 to 1.2 mm 0.05 in)	GX-M8A	GX-M8A-P	Normally open
				GX-M8B	GX-M8B-P	Normally closed
	M12			GX-M12A	GX-M12A-P	Normally open
				GX-M12B	GX-M12B-P	Normally closed
Non-shielded	M18		Max. operation distance: 5 mm 0.20 in (Stable sensing range 0 to 4 mm 0.16 in)	GX-M18A	GX-M18A-P	Normally open
				GX-M18B	GX-M18B-P	Normally closed
	M30			GX-M30A	GX-M30A-P	Normally open
				GX-M30B	GX-M30B-P	Normally closed
Non-shielded	M12		Max. operation distance: 7 mm 0.28 in (Stable sensing range 0 to 5.6 mm 0.22 in)	GX-MK12A	GX-MK12A-P	Normally open
				GX-MK12B	GX-MK12B-P	Normally closed
	M18			GX-MK18A	GX-MK18A-P	Normally open
				GX-MK18B	GX-MK18B-P	Normally closed
Non-shielded	M30		Max. operation distance: 12 mm 0.47 in (Stable sensing range 0 to 9.6 mm 0.38 in)	GX-MK30A	GX-MK30A-P	Normally open
				GX-MK30B	GX-MK30B-P	Normally closed

Notes: 1) It is the value in state where the circumference of a detection side has a metal object.

2) The maximum operation distance stands for the maximum distance for which the sensor can detect the standard sensing object.

The stable sensing range stands for the sensing range for which the sensor can stably detect the standard sensing object even if there is an ambient temperature drift and/or supply voltage fluctuation.

FIBER
SENSORSLASER
SENSORSPHOTOELECTRIC
SENSORSMICRO
PHOTOELECTRIC
SENSORSAREA
SENSORSLIGHT CURTAINS /
SAFETY
COMPONENTSPRESSURE /
FLOW
SENSORSINDUCTIVE
PROXIMITY
SENSORSPARTICULAR
USE SENSORSSENSOR
OPTIONSSIMPLE
WIRE-SAVING
UNITSWIRE-SAVING
SYSTEMSMEASUREMENT
SENSORSSTATIC ELECTRICITY
PREVENTION
DEVICESLASER
MARKERS


PLC

HUMAN MACHINE
INTERFACESENERGY CONSUMPTION
VISUALIZATION
COMPONENTS

FA COMPONENTS

MACHINE VISION
SYSTEMSUV CURING
SYSTEMSSelection
GuideAmplifier
Built-inAmplifier-
separated**GX-F/H****GXL****GL****GX-M****GX-U/GX-FU/
GX-N****GX**

ORDER GUIDE**DC 2-wire type (2 m cable length type)**

Type		Appearance	Sensing range (Note 1,2)	Model No.	Output operation
Standard	 Ex.) GX-M12□-U		Max. operation distance: 1.5 mm 0.06 in (Stable sensing range 0 to 1.2 mm 0.05 in)	GX-M8A-U	Normally open
				GX-M8B-U	Normally closed
			Max. operation distance: 2 mm 0.08 in (Stable sensing range 0 to 1.6 mm 0.06 in)	GX-M12A-U	Normally open
				GX-M12B-U	Normally closed
			Max. operation distance: 5 mm 0.20 in (Stable sensing range 0 to 4 mm 0.16 in)	GX-M18A-U	Normally open
				GX-M18B-U	Normally closed
Long range			Max. operation distance: 10 mm 0.39 in (Stable sensing range 0 to 8 mm 0.32 in)	GX-M30A-U	Normally open
				GX-M30B-U	Normally closed
			Max. operation distance: 2.5 mm 0.10 in (Stable sensing range 0 to 2 mm 0.08 in)	GX-ML8A-U	Normally open
				GX-ML8B-U	Normally closed
			Max. operation distance: 4 mm 0.16 in (Stable sensing range 0 to 3.2 mm 0.13 in)	GX-ML12A-U	Normally open
				GX-ML12B-U	Normally closed
		Max. operation distance: 8 mm 0.32 in (Stable sensing range 0 to 6.4 mm 0.25 in)	GX-ML18A-U	Normally open	
			GX-ML18B-U	Normally closed	
		Max. operation distance: 15 mm 0.59 in (Stable sensing range 0 to 12 mm 0.47 in)	GX-ML30A-U	Normally open	
			GX-ML30B-U	Normally closed	

Notes: 1) It is the value in state where the circumference of a detection side has a metal object.

2) The maximum operation distance stands for the maximum distance for which the sensor can detect the standard sensing object.

The stable sensing range stands for the sensing range for which the sensor can stably detect the standard sensing object even if there is an ambient temperature drift and/or supply voltage fluctuation.

M12 plug-in connector type (except for GX-M8□-U and GX-ML8□-U)

M12 plug-in connector type is also available.

When ordering this type, "Z" for the M12 plug-in connector type to the model No.

(e.g.) M12 plug-in connector type of **GX-M8A-P** is "**GX-M8A-P-Z**".

**M12 pigtailed type (for GX-M8□-U and GX-ML8□-U only)**

M12 pigtailed type is also available.



When ordering this type, "J" for the M12 pigtailed type to the model No.

(e.g.) M12 pigtailed type of **GX-M8A-U** is "**GX-M8A-U-J**".

• Mating cable (2 cables are required for the thru-beam type.)

Type	Model No.	Description
For M12 plug-in connector type	Straight	CN-24C-C2 Length: 2 m 6.56 ft
		CN-24C-C5 Length: 5 m 16.40 ft
	Elbow	CN-24CL-C2 Length: 2 m 6.56 ft
		CN-24CL-C5 Length: 5 m 16.40 ft

Clamping ring :
ø14mm **0.55 in**
Cable outer :
ø5.3mm **0.21 in**

Mating cable**• Straight type****• Elbow type**FIBER
SENSORSLASER
SENSORSPHOTO-
ELECTRIC
SENSORSMICRO
PHOTO-
ELECTRIC
SENSORSAREA
SENSORSLIGHT
CURTAINS /
SAFETY
COMPONENTSPRESSURE /
FLOW
SENSORSINDUCTIVE
PROXIMITY
SENSORSPARTICULAR
USE
SENSORSSENSOR
OPTIONSSIMPLE
WIRE-
SAVING
UNITSWIRE-
SAVING
SYSTEMSMEASURE-
MENT
SENSORSSTATIC
ELECTRICITY
PREVENTION
DEVICESLASER
MARKERS

PLC

HUMAN
MACHINE
INTERFACESENERGY
CONSUMPTION
VISUALIZATION
COMPONENTSFA
COMPONENTSMACHINE
VISION
SYSTEMSUV
CURING
SYSTEMSSelection
GuideAmplifier
Built-inAmplifier-
separated

GX-F/H

GXL

GL

GX-MGX-UG/GX-FU/
GX-N

GX

SPECIFICATIONS

DC 3-wire type

Item	Model No.	Type	Shielded type				Non-shielded type		
		Normally open	GX-M8A□	GX-M12A□	GX-M18A□	GX-M30A□	GX-MK12A□	GX-MK18A□	GX-MK30A□
		Normally closed	GX-M8B□	GX-M12B□	GX-M18B□	GX-M30B□	GX-MK12B□	GX-MK18B□	GX-MK30B□
Max. operation distance (Note 2,3)			1.5 mm 0.06 in ±10 %	2 mm 0.08 in ±10 %	5 mm 0.20 in ±10 %	10 mm 0.39 in ±10 %	7 mm 0.28 in ±10 %	12 mm 0.47 in ±10 %	22 mm 0.87 in ±10 %
Stable sensing range (Note 2,3)			0 to 1.2 mm 0 to 0.05 in	0 to 1.6 mm 0 to 0.06 in	0 to 4 mm 0 to 0.16 in	0 to 8 mm 0 to 0.32 in	0 to 5.6 mm 0 to 0.22 in	0 to 9.6 mm 0 to 0.38 in	0 to 17.6 mm 0 to 0.69 in
Standard sensing object			Iron sheet 8 × 8 × t1 mm 0.32 × 0.32 × t0.04 in	Iron sheet 12 × 12 × t1 mm 0.47 × 0.47 × t0.04 in	Iron sheet 18 × 18 × t1 mm 0.71 × 0.71 × t0.04 in	Iron sheet 30 × 30 × t1 mm 1.18 × 1.18 × t0.04 in	Iron sheet 24 × 24 × t1 mm 0.94 × 0.94 × t0.04 in	Iron sheet 24 × 24 × t1 mm 0.94 × 0.94 × t0.04 in	Iron sheet 45 × 45 × t1 mm 1.77 × 1.77 × t0.04 in
Hysteresis (Note 2)		15 % or less of operation distance (with standard sensing object)							
Repeatability (Note 2)		Along sensing axis: 5 % or less of operation distance							
Supply voltage		12 to 24 V DC ±10 % Ripple P-P 10 % or less							
Current consumption (Note 4)		10 mA or less							
Output		<NPN output type> NPN open-collector transistor • Maximum sink current 200 mA • Applied voltage: 24 V DC or less (between output and 0 V) • Residual voltage 2 V or less							
		<PNP output type> PNP open-collector transistor • Maximum source current 200 mA • Applied voltage: 24 V DC or less (between output and + V) • Residual voltage 2 V or less							
	Utilization category	DC-12 or DC-13							
	Short-circuit protection	Incorporated							
Max. response frequency		5 kHz	5 kHz	2 kHz	1 kHz	2.5 kHz	1 kHz	0.5 kHz	
Operation indicator		Yellow LED (lights up when the output is ON)							
Environmental resistance	Pollution degree	3 (industrial enviroment)							
	Protection	IP67 (IEC)	IP69K (DIN), IP68 (IEC) (2 m cable length type only) , IP67 (IEC) (M12 plug-in connector type only)						
	Ambient temperature	-25 to +70 °C -13 to +158 °F, Storage: -40 to +85 °C -40 to +185 °F							
	Ambient humidity	50 % RH or less (at +70 °C +158 °F)							
	EMC	EN 60947-5-2							
	Voltage withstandability	500 V AC for one min. between all supply terminals connected together and enclosure							
	Vibration resistance	10 to 55 Hz frequency, 0.5 mm 0.02 in amplitude in X, Y and Z directions for 1.5 hours each							
	Shock resistance	294 m/s² acceleration (30 G approx.) in X, Y and Z directions for three times each							
Sensing range variation (Note 2)		Within ±10 % fluctuation of sensing range at +23 °C +73 °F and rated voltage in the range of allowable temperature and supply voltage							
Material		Enclosure: Brass (Nickel plated), Sensing part: PPS							
Cable (except for M12 plug-in connector type)		0.44 mm² (0.15 mm² for GX-M8□) 3-core cabtyre cable, 2 m 6.56 ft long							
Cable extension		Extension up to total 10 m 32.80 ft is possible with 0.34 mm², or more, cable.							
Net weight (Note 5)	2 m cable length type	40 g approx.	70 g approx.	90 g approx.	150 g approx.	75 g approx.	100 g approx.	180 g approx.	
	M12 plug-in connector type	15 g approx.	20 g approx.	45 g approx.	110 g approx.	25 g approx.	55 g approx.	140 g approx.	
Accessories		Nut: 2 pcs.							

Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +23 °C **+73.4 °F**.

2) It is the value in state where the circumference of a detection side has a metal object.

3) The maximum operation distance stands for the maximum distance for which the sensor can detect the standard sensing object.

The stable sensing range stands for the sensing range for which the sensor can stably detect the standard sensing object even if there is an ambient temperature drift and/or supply voltage fluctuation.

4) It is the leakage current when the output is in the OFF state.

5) The weight includes the weight of two nuts.

SPECIFICATIONS

DC 3-wire type

Item	Model No.	Type	Shielded type				Non-shielded type		
		Normally open	GX-M8A□	GX-M12A□	GX-M18A□	GX-M30A□	GX-MK12A□	GX-MK18A□	GX-MK30A□
		Normally closed	GX-M8B□	GX-M12B□	GX-M18B□	GX-M30B□	GX-MK12B□	GX-MK18B□	GX-MK30B□
Max. operation distance (Note 2,3)			1.5 mm 0.06 in ±10 %	2 mm 0.08 in ±10 %	5 mm 0.20 in ±10 %	10 mm 0.39 in ±10 %	7 mm 0.28 in ±10 %	12 mm 0.47 in ±10 %	22 mm 0.87 in ±10 %
Stable sensing range (Note 2,3)			0 to 1.2 mm 0 to 0.05 in	0 to 1.6 mm 0 to 0.06 in	0 to 4 mm 0 to 0.16 in	0 to 8 mm 0 to 0.32 in	0 to 5.6 mm 0 to 0.22 in	0 to 9.6 mm 0 to 0.38 in	0 to 17.6 mm 0 to 0.69 in
Standard sensing object			Iron sheet 8 × 8 × t1 mm 0.32 × 0.32 × t0.04 in	Iron sheet 12 × 12 × t1 mm 0.47 × 0.47 × t0.04 in	Iron sheet 18 × 18 × t1 mm 0.71 × 0.71 × t0.04 in	Iron sheet 30 × 30 × t1 mm 1.18 × 1.18 × t0.04 in	Iron sheet 24 × 24 × t1 mm 0.94 × 0.94 × t0.04 in	Iron sheet 24 × 24 × t1 mm 0.94 × 0.94 × t0.04 in	Iron sheet 45 × 45 × t1 mm 1.77 × 1.77 × t0.04 in
Hysteresis (Note 2)		15 % or less of operation distance (with standard sensing object)							
Repeatability (Note 2)		Along sensing axis: 5 % or less of operation distance							
Supply voltage		12 to 24 V DC ±10 % Ripple P-P 10 % or less							
Current consumption (Note 4)		10 mA or less							
Output		<NPN output type> NPN open-collector transistor • Maximum sink current 200 mA • Applied voltage: 24 V DC or less (between output and 0 V) • Residual voltage 2 V or less				<PNP output type> PNP open-collector transistor • Maximum source current 200 mA • Applied voltage: 24 V DC or less (between output and + V) • Residual voltage 2 V or less			
		Utilization category		DC-12 or DC-13					
		Short-circuit protection		Incorporated					
Max. response frequency			5 kHz	5 kHz	2 kHz	1 kHz	2.5 kHz	1 kHz	0.5 kHz
Operation indicator		Yellow LED (lights up when the output is ON)							
Environmental resistance	Pollution degree		3 (industrial enviroment)						
	Protection		IP67 (IEC)	IP69K (DIN), IP68 (IEC) (2 m cable length type only) , IP67 (IEC) (M12 plug-in connector type only)					
	Ambient temperature		-25 to +70 °C -13 to +158 °F, Storage: -40 to +85 °C -40 to +185 °F						
	Ambient humidity		50 % RH or less (at +70 °C +158 °F)						
	EMC		EN 60947-5-2						
	Voltage withstandability		500 V AC for one min. between all supply terminals connected together and enclosure						
	Vibration resistance		10 to 55 Hz frequency, 0.5 mm 0.02 in amplitude in X, Y and Z directions for 1.5 hours each						
	Shock resistance		294 m/s² acceleration (30 G approx.) in X, Y and Z directions for three times each						
Sensing range variation (Note 2)		Within ±10 % fluctuation of sensing range at +23 °C +73 °F and rated voltage in the range of allowable temperature and supply voltage							
Material		Enclosure: Brass (Nickel plated), Sensing part: PPS							
Cable (except for M12 plug-in connector type)		0.44 mm² (0.15 mm² for GX-M8□) 3-core cabtyre cable, 2 m 6.56 ft long							
Cable extension		Extension up to total 10 m 32.80 ft is possible with 0.34 mm², or more, cable.							
Net weight (Note 5)	2 m cable length type	40 g approx.	70 g approx.	90 g approx.	150 g approx.	75 g approx.	100 g approx.	180 g approx.	
	M12 plug-in connector type	15 g approx.	20 g approx.	45 g approx.	110 g approx.	25 g approx.	55 g approx.	140 g approx.	
Accessories		Nut: 2 pcs.							

Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +23 °C **+73.4 °F**.

2) It is the value in state where the circumference of a detection side has a metal object.

3) The maximum operation distance stands for the maximum distance for which the sensor can detect the standard sensing object.

The stable sensing range stands for the sensing range for which the sensor can stably detect the standard sensing object even if there is an ambient temperature drift and/or supply voltage fluctuation.

4) It is the leakage current when the output is in the OFF state.

5) The weight includes the weight of two nuts.

SPECIFICATIONS**DC 2-wire type**

Item	Model No.	Type	Standard type				Long range type			
		Normally open	GX-M8A-U(-J)	GX-M12A-U(-Z)	GX-M18A-U(-Z)	GX-M30A-U(-Z)	GX-ML8A-U(-J)	GX-ML12A-U(-Z)	GX-ML18A-U(-Z)	GX-ML30A-U(-Z)
		Normally closed	GX-M8B-U(-J)	GX-M12B-U(-Z)	GX-M18B-U(-Z)	GX-M30B-U(-Z)	GX-ML8B-U(-J)	GX-ML12B-U(-Z)	GX-ML18B-U(-Z)	GX-ML30B-U(-Z)
Max. operation distance (Note 2,3)			1.5 mm 0.06 in ±10 %	2 mm 0.08 in ±10 %	5 mm 0.20 in ±10 %	10 mm 0.39 in ±10 %	2.5 mm 0.10 in ±10 %	4 mm 0.16 in ±10 %	8 mm 0.32 in ±10 %	15 mm 0.59 in ±10 %
Stable sensing range (Note 2,3)			0 to 1.2 mm 0 to 0.05 in	0 to 1.6 mm 0 to 0.06 in	0 to 4 mm 0 to 0.09 in	0 to 8 mm 0 to 0.22 in	0 to 2 mm 0 to 0.08 in	0 to 3.2 mm 0 to 0.13 in	0 to 6.4 mm 0 to 0.25 in	0 to 12 mm 0 to 0.47 in
Standard sensing object			Iron sheet 8 × 8 × 1 mm 0.32 × 0.32 × 1.04 in	Iron sheet 12 × 12 × 1 mm 0.47 × 0.47 × 1.04 in	Iron sheet 18 × 18 × 1 mm 0.71 × 0.71 × 1.04 in	Iron sheet 30 × 30 × 1 mm 1.18 × 1.18 × 1.04 in	Iron sheet 8 × 8 × 1 mm 0.32 × 0.32 × 1.04 in	Iron sheet 12 × 12 × 1 mm 0.47 × 0.47 × 1.04 in	Iron sheet 18 × 18 × 1 mm 0.71 × 0.71 × 1.04 in	Iron sheet 30 × 30 × 1 mm 1.18 × 1.18 × 1.04 in
Hysteresis (Note 2)			15 % or less of operation distance (with standard sensing object)							
Repeatability (Note 2)			Along sensing axis: 5 % or less of operation distance							
Supply voltage			12 to 24 V DC ±10 % Ripple P-P 10 % or less							
Current consumption (Note 4)			0.5 mA or less							
Output			Non-contact DC 2-wire type • Load current: 1.5 to 100 mA • Residual voltage: 4.2 V or less (Note 5)							
			Utilization category							
			Short-circuit protection							
			DC-12 or DC-13							
			Incorporated							
Max. response frequency			1 kHz	1 kHz	1.2 kHz	1.3 kHz	1.1 kHz	1.3 kHz	1.5 kHz	0.8 kHz
Operation indicator			Yellow LED (lights up when the output is ON)							
Environmental resistance	Pollution degree		3 (Industrial environment)							
	Protection		IP67 (IEC)	IP69K (DIN), IP68 (IEC) (2 m cable length type only) , IP67 (IEC) (M12 plug-in connector type only)						
	Ambient temperature		-25 to +70 °C -13 to +158 °F , Storage: -40 to +85 °C -40 to +185 °F							
	Ambient humidity		50 % RH or less (at +70 °C +158 °F)							
	EMC		EN 60947-5-2							
	Voltage withstandability		500 V AC for one min. between all supply terminals connected together and enclosure							
	Vibration resistance		10 to 55 Hz frequency, 0.5 mm 0.02 in amplitude in X, Y and Z directions for 1.5 hours each							
	Shock resistance		294 m/s ² acceleration (30 G approx.) in X, Y and Z directions for three times each							
Sensing range variation (Note 2)			Within ±10 % fluctuation of sensing range at +23 °C +73 °F and rated voltage in the range of allowable temperature and supply voltage							
Material			Enclosure: Brass (Nickel plated), Sensing part: PPS							
Cable (except for M12 plug-in connector type)			0.44 mm ² [0.15 mm ² for GX-M(L)8□-U] 2-core cabtyre cable, 2 m 6.56 ft long							
Cable extension			Extension up to total 10 m 32.80 ft is possible with 0.34 mm ² , or more, cable.							
Net weight (Note 6)	2 m cable length type		40 g approx.	70 g approx.	90 g approx.	150 g approx.	40 g approx.	70 g approx.	90 g approx.	150 g approx.
	M12 pigtailed(-J type) / M12 plug-in connector type		20 g approx.	20 g approx.	45 g approx.	110 g approx.	20 g approx.	20 g approx.	45 g approx.	110 g approx.
Accessories			Nut: 2 pcs.							

Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +23 °C **+73.4 °F**.

2) It is the value in state where the circumference of a detection side has a metal object.

3) The maximum operation distance stands for the maximum distance for which the sensor can detect the standard sensing object.

The stable sensing range stands for the sensing range for which the sensor can stably detect the standard sensing object even if there is an ambient temperature drift and/or supply voltage fluctuation.

4) It is the leakage current when the output is in the OFF state.

5) When the cable is extended, the residual voltage becomes larger.

6) The weight includes the weight of two nuts.

FIBER SENSORS

LASER SENSORS

PHOTO-ELECTRIC SENSORS

MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

LIGHT CURTAINS / SAFETY COMPONENTS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

SIMPLE WIRE-SAVING UNITS

WIRE-SAVING SYSTEMS

MEASURE-MENT SENSORS

STATIC ELECTRICITY PREVENTION DEVICES

LASER MARKERS

PLC

HUMAN MACHINE INTERFACES

ENERGY CONSUMPTION VISUALIZATION COMPONENTS

FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS

Selection Guide

Amplifier Built-in

Amplifier-separated

GX-F/H

GXL

GL

GX-M

GX-U/GX-FU/

GX-N

GX


FIBER SENSORS
LASER SENSORS
PHOTO-ELECTRIC SENSORS
MICRO PHOTO-ELECTRIC SENSORS
AREA SENSORS
LIGHT CURTAINS/SAFETY COMPONENTS
PRESSURE / FLOW SENSORS
INDUCTIVE PROXIMITY SENSORS
PARTICULAR USE SENSORS
SENSOR OPTIONS
SIMPLE WIRE-SAVING UNITS
WIRE-SAVING SYSTEMS
MEASURE-MENT SENSORS
STATIC ELECTRICITY PREVENTION DEVICES
LASER MARKERS
PLC
HUMAN MACHINE INTERFACES
ENERGY CONSUMPTION VISUALIZATION COMPONENTS
FA COMPONENTS
MACHINE VISION SYSTEMS
UV CURING SYSTEMS
Selection Guide
Amplifier Built-in
Amplifier-separated
GX-F/H
GXL
GL
GX-M
GX-U/GX-FU/GX-N
GX

WIRING DIAGRAMS


DC 3-wire type

Wiring diagram

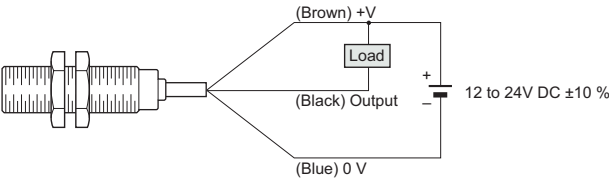NPN output type



PNP output type

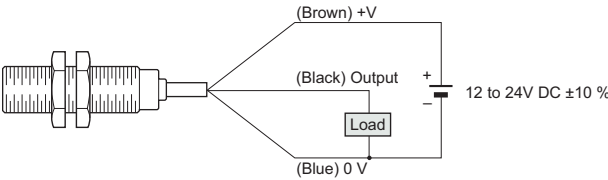

Connector pin position

M12 connector



• Normally Open


- 1 : +V
- 2 : Not connected
- 3 : 0 V
- 4 : Output

• Normally Closed

- 1 : +V
- 2 : Output
- 3 : 0 V
- 4 : Not connected

DC 2-wire type

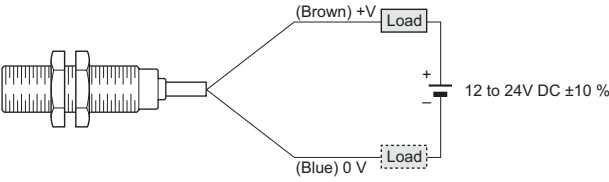Wiring diagram



Connector pin position

M12 connector



• Normally Open

- (except for GX-M8□-U-J and GX-ML8□-U-J)
- 1 : Not connected
- 2 : Not connected
- 3 : +V
- 4 : 0 V

• Normally Closed

- 1 : +V
- 2 : 0 V
- 3 : Not connected
- 4 : Not connected

• Normally Open

- (GX-M8□-U-J and GX-ML8□-U-J only, On sale soon)
- 1 : +V
- 2 : Not connected
- 3 : Not connected
- 4 : 0 V

PRECAUTIONS FOR PROPER USE

Refer to p.1485~ for general precautions.

FIBER
SENSORSLASER
SENSORSPHOTO-
ELECTRIC
SENSORSMICRO
PHOTO-
ELECTRIC
SENSORSAREA
SENSORSLIGHT
CURTAINS /
SAFETY
COMPONENTSPRESSURE /
FLOW
SENSORSINDUCTIVE
PROXIMITY
SENSORSPARTICULAR
USE
SENSORSSENSOR
OPTIONSSIMPLE
WIRE-
SAVING
UNITSWIRE-
SAVING
SYSTEMSMEASURE-
MENT
SENSORSSTATIC
ELECTRICITY
PREVENTION
DEVICESLASER
MARKERS

PLC

HUMAN
MACHINE
INTERFACESENERGY
CONSUMPTION
VISUALIZATION
COMPONENTSFA
COMPONENTSMACHINE
VISION
SYSTEMSUV
CURING
SYSTEMSSelection
GuideAmplifier
Built-inAmplifier-
separated

GX-F/H

GXL

GL

GX-M
GX-UG/GX-FU/
GX-N


GX



- Never use this product as a sensing device for personnel protection.
- In case of using sensing devices for personnel protection, use products which meet laws and standards, such as OSHA, ANSI or IEC etc., for personnel protection applicable in each region or country.

Mounting

- The tightening torque should be under the value given below.



Model No.	Sensor size	Tightening torque	
		Sensor	Connector (Note)
GX-M□	M8	5 N·m	2 N·m
	M12	6 N·m	2 N·m
	M18	15 N·m	2 N·m
	M30	40 N·m	2 N·m
GX-M(L)8□-U-J	M8	5 N·m	1.5 N·m


Note: Connector is equipped with -Z type or -J type.

Distance from surrounding metal

- As metal around the sensor may affect the sensing performance, pay attention to the following points.

Influence of surrounding metal


- The surrounding metal will affect the sensing performance. Keep the minimum distance specified in the table below.



Type	A (mm in)			
	M8	M12	M18	M30
DC 3-wire shielded type	3 0.12	4 0.16	10 0.39	20 0.79
DC 3-wire non-shielded type	-	21 0.83	36 1.42	66 2.60
DC 2-wire standard type	4.5 0.18	6 0.23	15 0.59	30 1.18
DC 2-wire long range type	8 0.32	12 0.47	25 0.98	45 1.77

Embedding of the sensor in metal

- Sensing range may decrease if the sensor is completely embedded in metal. Especially for the non-shielded type, keep the minimum distance specified in the right table.





Note: With the non-shielded type, the sensing range may vary depending on the position of the nuts.

Sensor size	B (mm in)	C (mm in)
M12	12 0.47	12 0.47
M18	18 0.71	18 0.71
M30	30 1.18	30 1.18

Mutual interference

- When two or more sensors are installed in parallel or face to face, keep the minimum separation distance specified below to avoid mutual interference.

Face to face mounting**Parallel mounting**

Type	D (mm in)				E (mm in)			
	M8	M12	M18	M30	M8	M12	M18	M30
DC 3-wire shielded type	18 0.71	24 0.94	60 2.36	120 4.72	3 0.12	4 0.16	10 0.39	20 0.77
DC 3-wire non-shielded type	-	84 3.30	144 5.67	264 10.39	-	48 1.89	72 2.83	120 4.72
DC 2-wire standard type	18 0.71	24 0.94	60 2.36	120 4.72	3 0.12	4 0.16	10 0.39	20 0.77
DC 2-wire long range type	30 1.18	50 1.97	100 3.93	180 7.09	5 0.20	8 0.32	16 0.63	30 1.18

Wiring

- Make sure that the power supply is off while wiring.
- Verify that the supply voltage variation is within the rating.
- If power is supplied from a commercial switching regulator, ensure that the frame ground (F.G.) terminal of the power supply is connected to an actual ground.
- Ensure that an isolation transformer is utilized for the DC power supply. If an autotransformer is utilized, the main body or power supply may be damaged.
- If the used power supply generates a surge, connect a surge absorber to the power supply to absorb the surge.
- In case noise generating equipment (switching regulator, inverter motor, etc.) is used in the vicinity of this product, connect the frame ground (F.G.) terminal of the equipment to an actual ground.
- Do not run the wires together with high-voltage lines or power lines or put them in the same raceway. This can cause malfunction due to induction.
- Damage or burnout may result in case of short circuit of load or miswiring.
- Make a cable length as short as possible to lessen noise pickup.

FIBER
SENSORSLASER
SENSORSPHOTO-
ELECTRIC
SENSORSMICRO
PHOTO-
ELECTRIC
SENSORSAREA
SENSORSLIGHT
CURTAINS/
SAFETY
COMPONENTSPRESSURE /
FLOW
SENSORSINDUCTIVE
PROXIMITY
SENSORSPARTICULAR
USE
SENSORSSENSOR
OPTIONSSIMPLE
WIRE-SAVING
UNITSWIRE-SAVING
SYSTEMSMEASURE-
MENT
SENSORSSTATIC
ELECTRICITY
PREVENTION
DEVICESLASER
MARKERS

PLC

HUMAN
MACHINE
INTERFACESENERGY
CONSUMPTION
VISUALIZATION
COMPONENTSFA
COMPONENTSMACHINE
VISION
SYSTEMSUV
CURING
SYSTEMSSelection
GuideAmplifier
Built-inAmplifier-
separated

GX-F/H

GXL

GL

GX-M

GX-U/GX-FU/
GX-N

GX


Refer to p.1485~ for general precautions.

PRECAUTIONS FOR PROPER USE

Others


- Our products have been developed / produced for industrial use only.
- Avoid using a product where there is excessive vapor, dust or corrosive gas, or in a place where it could be exposed directly to water or chemicals.
- Take care that the sensor does not come in direct contact with water, oil, grease or organic solvents, such as, thinner, etc.
- Do not use in an environment containing inflammable or explosive gases.
- Never disassemble or modify the product.

DIMENSIONS (Unit: mm in)




DC 3-wire type

Sensors		2 m cable length type (mm in)		M12 plug-in connector type (mm in)	
Shielded type		a	b	a	b
M8	GX-M8 □	33 1.30	25 0.98	45 1.77	24 0.94
M12	GX-M12 □	35 1.38	25 0.98	50 1.97	30 1.18
M18	GX-M18 □	39 1.54	28 1.10	50 1.97	28 1.10
M30	GX-M30 □	43 1.69	32 1.26	55 2.17	32 1.26



Sensors		2 m cable length type (mm in)			M12 plug-in connector type (mm in)		
Non-shielded type		a	b	c	a	b	c
M12	GX-MK12 □	55 2.17	42 1.65	5 0.20	66 2.60	42 1.65	5 0.20
M18	GX-MK18 □	60 2.36	44 1.73	8 0.32	72 2.83	44 1.73	8 0.32
M30	GX-MK30 □	63 2.48	41 1.61	13 0.51	74 2.91	41 1.61	13 0.51



DC 2-wire type

Sensors		2 m cable length type (mm in)		M12 plug-in connector type (mm in) (M8 size: M12 pigtailed type)	
Standard type, Long range type		a	b	a	b
M8	GX-M(L)8 □-U (-J)	33 1.30	25 0.98	—	24 0.94
M12	GX-M(L)12 □-U (-Z)	35 1.38	25 0.98	50 1.97	30 1.18
M18	GX-M(L)18 □-U (-Z)	39 1.54	28 1.10	50 1.97	28 1.10
M30	GX-M(L)30 □-U (-Z)	43 1.69	32 1.26	55 2.17	32 1.26