

## Base strip - MCV 1,5/ 4-GF-3,5-LR - 1818012

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Number of positions: 4, Pitch: 3.5 mm, Color: green, Contact surface: Tin, Mounting: Wave soldering



The figure shows a 10-position version of the product



### Key Commercial Data

|                                      |                                                                                                         |
|--------------------------------------|---------------------------------------------------------------------------------------------------------|
| Packing unit                         | 50 pc                                                                                                   |
| Minimum order quantity               | 50 pc                                                                                                   |
| GTIN                                 | <br>4 046356 754996 |
| Weight per Piece (excluding packing) | 2.3 g                                                                                                   |
| Custom tariff number                 | 85366990                                                                                                |
| Country of origin                    | Germany                                                                                                 |
| Note                                 | Made to Order (non-returnable)                                                                          |

### Technical data

#### Dimensions

|                          |              |
|--------------------------|--------------|
| Length                   | 7.25 mm      |
| Pitch                    | 3.50 mm      |
| Dimension a              | 10.5 mm      |
| Length of the solder pin | 3.4 mm       |
| Pin dimensions           | 0,8 x 0,8 mm |
| Hole diameter            | 1.2 mm       |

#### General

|                             |                   |
|-----------------------------|-------------------|
| Range of articles           | MCV 1,5/...-GF-LR |
| Insulating material group   | IIIa              |
| Rated surge voltage (III/3) | 2.5 kV            |
| Rated surge voltage (III/2) | 2.5 kV            |
| Rated surge voltage (II/2)  | 2.5 kV            |

## Base strip - MCV 1,5/ 4-GF-3,5-LR - 1818012

### Technical data

#### General

|                                        |        |
|----------------------------------------|--------|
| Rated voltage (III/3)                  | 160 V  |
| Rated voltage (III/2)                  | 160 V  |
| Rated voltage (II/2)                   | 250 V  |
| Connection in acc. with standard       | EN-VDE |
| Nominal current $I_N$                  | 8 A    |
| Maximum load current                   | 8 A    |
| Insulating material                    | PBT    |
| Flammability rating according to UL 94 | V0     |
| Color                                  | green  |
| Number of positions                    | 4      |

#### Standards and Regulations

|                                        |        |
|----------------------------------------|--------|
| Connection in acc. with standard       | EN-VDE |
|                                        | CUL    |
| Flammability rating according to UL 94 | V0     |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27260701 |
| eCl@ss 6.0 | 27260704 |
| eCl@ss 7.0 | 27440402 |
| eCl@ss 8.0 | 27440402 |
| eCl@ss 9.0 | 27440402 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002637 |
| ETIM 5.0 | EC002637 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211810 |
| UNSPSC 7.0901 | 39121409 |
| UNSPSC 11     | 39121409 |
| UNSPSC 12.01  | 39121409 |
| UNSPSC 13.2   | 39121409 |

## Base strip - MCV 1,5/ 4-GF-3,5-LR - 1818012

### Approvals

#### Approvals

#### Approvals

VDE Gutachten mit Fertigungsüberwachung / EAC / cULus Recognized / IECEx CB Scheme

#### Ex Approvals

#### Approvals submitted

#### Approval details

|                                                                                                                            |       |
|----------------------------------------------------------------------------------------------------------------------------|-------|
| VDE Gutachten mit Fertigungsüberwachung  |       |
| Nominal current I <sub>N</sub>                                                                                             | 8 A   |
| Nominal voltage U <sub>N</sub>                                                                                             | 160 V |

|     |
|-----|
| EAC |
|-----|


|                                |       |       |
|--------------------------------|-------|-------|
| cULus Recognized               |       |       |
|                                | B     | D     |
| Nominal current I <sub>N</sub> | 8 A   | 8 A   |
| Nominal voltage U <sub>N</sub> | 300 V | 300 V |

|                                                                                                     |       |
|-----------------------------------------------------------------------------------------------------|-------|
| IECEx CB Scheme  |       |
| Nominal current I <sub>N</sub>                                                                      | 8 A   |
| Nominal voltage U <sub>N</sub>                                                                      | 160 V |


### Drawings

## Base strip - MCV 1,5/ 4-GF-3,5-LR - 1818012

Drilling diagram

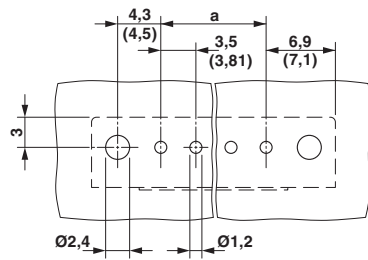

Dimensional drawing

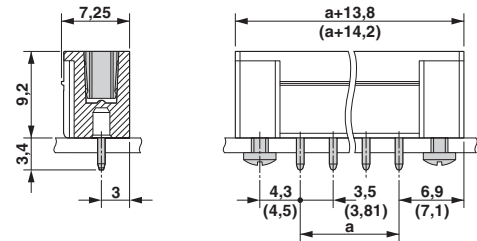

Dimensional drawing

