


5x20mm fused terminal blocks

Product overview

- 1 - 5 pole terminal strip with 5x20mm fuseholder
- Integral spare fuse carrier
- Interlocking fuseholder with CFTBN/1
- Anti rotation spigot
- IP20 finger protection
- Cable entry 4mm² (2.5mm² with wire protector)
- Wire protector on fuse terminal as standard
- Wire protectors on earth pole to order
- **CE** approved
- EN60127 - Fuseholders
- EN60998 - Terminal blocks
- UL approved - UL 1059

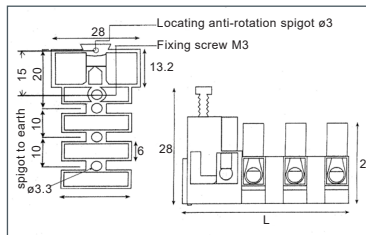

SPECIFICATION	
Rating	Fuseholder 250V AC Terminal 450V AC
Current rating	Fuseholder 13A Terminal 20A
Moulding	UL94-V0 flame retardant PA
Terminal	Brass, nickel plated
Fuse clip	Phosphor bronze
Wire protector	Stainless steel
Temperature	-20° to 120°C
Fuse size	5x20mm glass or ceramic
Screws	Steel zinc plated M3, 0.5Nm
GWIT	775°C
GWFI	850°C

PART NO.	BODY DIMENSIONS (L)	FUSE WIRE PROTECTOR	M3 FIXING HOLE	FIXING SCREW & WASHERS	EARTH WIRE PROTECTED	WIRE PROTECTED TERMINALS
CFTBN/1	16.1 mm	•				
CFTBN/2	20.6 mm	•				
CFTBN/3	30.8 mm	•	•	•		
CFTBN/4	40.7 mm	•	•	•		
CFTBN/5	50.9 mm	•	•	•		
CFTBN/3NE	30.8 mm	•				
CFTBN/4NE	40.7 mm	•				
CFTBN/5NE	50.9 mm	•				
CFTBN/3NS	30.8 mm	•	•			
CFTBN/4NS	40.7 mm	•	•			
CFTBN/5NS	50.9 mm	•	•			
CFTBN/2WP	20.6 mm	•				•
CFTBN/3WP	30.8 mm	•				•
CFTBN/4WP	40.7 mm					