

CRYSTAL OSCILLATOR
SPXO

SG-210 STF

- Frequency range : 1 MHz to 60 MHz
- Supply voltage : 1.6 V to 3.6 V
- Function : Standby(\overline{ST})
- External dimensions : 2.5 × 2.0 × 0.8 mm
- Operation temperature : -40 to +105 °C

NEWProduct Number (please contact us)
X1G004171xxxx00

Actual size




Specifications (characteristics)

Item	Symbol	Specifications	Conditions / Remarks		
Output frequency range	f_0	1MHz to 60MHz	Please contact us about available frequencies.		
Supply voltage	Vcc	1.6V to 3.6V			
		1.8 V Typ. 1.6 V to 2.2 V		2.5 V Typ. 2.2 V to 3.0 V	3.3 V Typ. 2.7 V to 3.6 V
Storage temperature	T_stg	-40 °C to +125 °C	Storage as single product.		
Operating temperature	T_use	-40 °C to +85 °C / -40 °C to +105 °C			
Frequency tolerance	f_tol	S: $\pm 25 \times 10^{-6}$	-20 °C to +70 °C		
		L: $\pm 50 \times 10^{-6}$	-40 °C to +85 °C		
		Y: $\pm 50 \times 10^{-6}$, W: $\pm 100 \times 10^{-6}$	-40 °C to +105 °C		
Current consumption	Icc	1.5 mA Max.	No load condition 1MHz < f_0 ≤ 20MHz		
		1.8 mA Max.	No load condition 20MHz < f_0 ≤ 40MHz		
		2.1 mA Max.	No load condition 40MHz < f_0 ≤ 60MHz		
Stand-by current	I_std	1.6 mA Max.			
		2.0 mA Max.			
		2.2 mA Max.			
Symmetry	SYM	2.4 mA Max.			
		2.5 μ A Max.			
		2.6 mA Max.			
Output voltage	VoH	2.7 μ A Max.	\overline{ST} = GND		
		45 % to 55 %	50 % Vcc level L_CMOS ≤ 15 pF		
Output load condition (CMOS)	L_CMOS	90% Vcc Min.			
		10% Vcc Max..			
Input voltage	ViH	15 pF Max.			
		80 % Vcc Min.			
Rise time and Fall time	tr/ tr	20 % Vcc level, L_CMOS=15 pF			
		4 ns Max.	3 ns Max.		
Start-up time	t_str	3 ms Max.			
		$t=0$ at 90 % Vcc+85°C,(+105 °C.)			
Frequency aging	f_aging	$\pm 3 \times 10^{-6}$ / year Max.	+25 °C, First year, Vcc=1.8 V, 2.5 V, 3.3 V		
			@1kHz ,fo=48MHz		
SSB Phase noise	C/N	-145 dBc/Hz Typ.	@100kHz ,fo=48MHz		
		-158 dBc/Hz Typ.	@Floor Lv.		
		-161 dBc/Hz Typ.			

External dimensions

(Unit:mm)

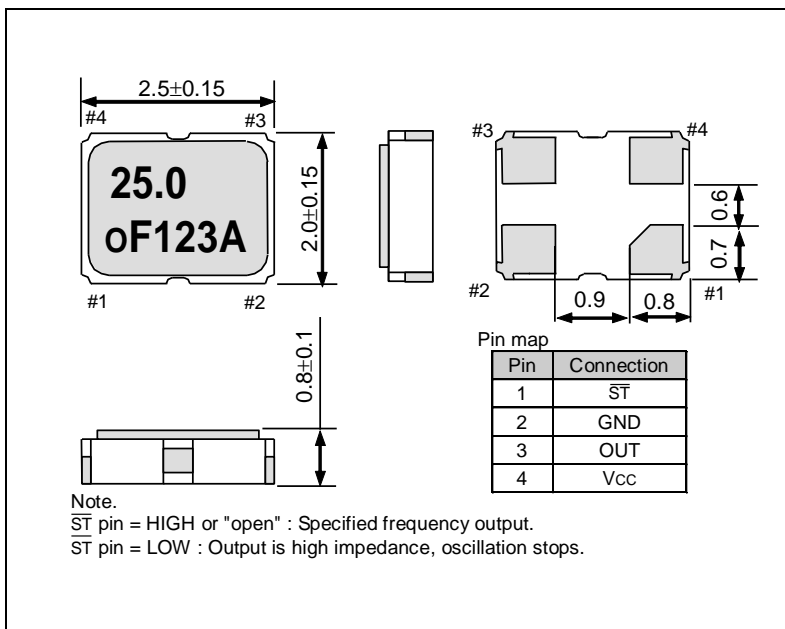

Footprint (Recommended)

(Unit:mm)

