

XPSABV1133C

module XPSABV - stop and switch monitoring -
24 V AC/DC



Main

Range of product	Preventa Safety automation
Product or component type	Preventa safety module
Safety module name	XPSABV
Safety module application	For emergency stop and switch monitoring
Safety level	Can reach PL d/category 3 conforming to EN/ISO 13849-1 time delay safety outputs Can reach PL e/category 4 conforming to EN/ISO 13849-1 instantaneous safety outputs Can reach SILCL 3 conforming to EN/IEC 62061 instantaneous safety outputs Can reach SILCL 2 conforming to EN/IEC 62061 time delay safety outputs
Safety reliability data	MTTFd = 53 years conforming to EN/ISO 13849-1 instantaneous safety outputs MTTFd = 53 years conforming to EN/ISO 13849-1 time delay safety outputs DC > 99 % conforming to EN/ISO 13849-1 instantaneous safety outputs DC = 60...90 % conforming to EN/ISO 13849-1 time delay safety outputs PFHd = 3E-8 1/h conforming to EN/IEC 62061 instantaneous safety outputs PFHd = 2E-7 1/h conforming to EN/IEC 62061 time delay safety outputs
Connections - terminals	Spring terminals, removable terminal block, clamping capacity: 1 x 0.2...1 x 2.5 mm ² solid cable without cable end Spring terminals, removable terminal block, clamping capacity: 1 x 0.2...1 x 2.5 mm ² flexible cable without cable end Spring terminals, removable terminal block, clamping capacity: 1 x 0.25...1 x 2.5 mm ² flexible cable with cable end, without bezel Spring terminals, removable terminal block, clamping capacity: 1 x 0.25...1 x 2.5 mm ² flexible cable with cable end, with bezel Spring terminals, removable terminal block, clamping capacity: 2 x 0.5...2 x 1 mm ² flexible cable with cable end, with double bezel Spring terminals, removable terminal block
Output type	Relay instantaneous opening 2 NO, volt-free Relay time delay opening 1 NO, volt-free
Number of additional circuits	0
[Us] rated supply voltage	24 V DC (- 15...10 %)

Complementary

Synchronisation time between inputs	< 0.5 s
Power consumption in W	<= 3 W

Input protection type	Internal, electronic
Time delay range	0.15...3 s 1.5...30 s
Control circuit voltage	24 V DC
Breaking capacity	B300 : 3600 VA, AC-15 (inrush) B300 : 360 VA, AC-15 (holding)
Breaking capacity	1.5 A at 24 V (DC-13) time constant: 50 ms for relay output
Output thermal current	6 A for instantaneous and time delay outputs
[Ith] conventional free air thermal current	12 A
Associated fuse rating	6 A fuse type gG for instantaneous and time delay outputs
Minimum output current	10 mA for relay output
Minimum output voltage	17 V for relay output
Response time on input open	<= 200 ms
[Ui] rated insulation voltage	300 V (degree of pollution: 2) conforming to DIN VDE 0110 part 1 300 V (degree of pollution: 2) conforming to IEC 60947-5-1
[Uimp] rated impulse withstand voltage	4 kV overvoltage category III conforming to IEC 60947-5-1 4 kV overvoltage category III conforming to DIN VDE 0110 part 1
Local signalling	3 LEDs
Mounting support	35 mm symmetrical DIN rail
Product weight	0.275 kg


Environment

Standards	EN 1088/ISO 14119 EN/IEC 60947-5-1 EN/ISO 13850 EN/IEC 60204-1
Product certifications	BG CSA UL
IP degree of protection	IP40 conforming to EN/IEC 60529 IP20 conforming to EN/IEC 60529
Ambient air temperature for operation	-25...55 °C
Ambient air temperature for storage	-25...75 °C

Contractual warranty

Warranty period	18 months
-----------------	-----------

Dimensions

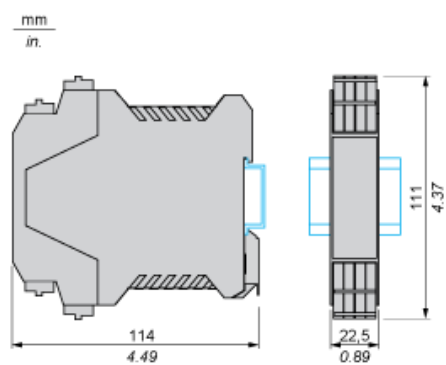

Wiring Diagrams

Refer to the Instruction Sheet

To download the instruction sheet, follow below procedure:

The screenshot shows the Schneider Electric website interface for the XPSAC5121 module. On the left, a sidebar titled "Discover XPSAC5121 by" lists several categories: Characteristics, Dimensions Drawings, Connections and Schema, Technical Description, and Download & Documents. The "Download & Documents" category is highlighted with a red box and a circled number 1. To the right, the main content area displays the product name "XPSAC5121" and its description "module XPSAC - Emergency stop - 24 V AC DC". Below this, there is a link to "Download XPSAC5121 product datasheet". Further down, a section titled "Download & Documents 1 to 3 of 3 (Total: -1)" contains three categories: "Instruction sheet", "Image of product", and "Certificate". The "Instruction sheet" category is highlighted with a red box and a circled number 2. It shows a table with one entry: "XPSAC... Safety module for emergency stop and switch monitoring" in English, dated 2012-07-04, with a PDF icon and a download button.

Discover XPSAC5121 by

- Characteristics
- Dimensions Drawings
- Connections and Schema
- Technical Description
- **Download & Documents**

XPSAC5121
module XPSAC - Emergency stop - 24 V AC DC

[Download XPSAC5121 product datasheet](#)

Download & Documents 1 to 3 of 3 (Total: -1)

Instruction sheet

XPSAC... Safety module for emergency stop and switch monitoring	English 2012-07-04	pdf (29)
---	--------------------	----------

Image of product

Emergency stop and switch monitoring	2010-11-10	(Select :)
--------------------------------------	------------	------------

Certificate

Russian certificate	English 2010-07-07	pdf (60)
---------------------	--------------------	----------

- 1 Click on Download & Documents.
- 2 Click on Instruction sheet.