

NEW!

Shielded Power Inductors—MSS1583



- 14.8 × 14.8 mm footprint; 8.6 mm high shielded inductors
- 16 inductance values from 10 μ H to 1 mH
- Low DCR and excellent current handling

Core material Ferrite

Environment RoHS compliant, halogen free

Terminations RoHS compliant matte tin over nickel over phosphorus. Other terminations available at additional cost.

Weight: 3.7 – 4.4 g

Ambient temperature –40°C to +85°C with Irms current, +85°C to +125°C with derated current

Storage temperature Component: –40°C to +125°C.

Tape and reel packaging: –40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Failures in Time (FIT) / Mean Time Between Failures (MTBF)

38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332

Packaging 300/13" reel; Plastic tape: 32 mm wide, 0.5 mm thick, 24 mm pocket spacing, 8.6 mm pocket depth

PCB washing Tested with pure water or alcohol only. For other solvents, see Doc787_PCB_Washing.pdf

Part number ¹	Inductance ² (μ H)	DCR (Ohms) ³		SRF typ ⁴ (MHz)	Isat (A) ⁵			Irms (A) ⁶	
		typ	max		10% drop	20% drop	30% drop	20°C rise	40°C rise
MSS1583-103ME_	10 $\pm$ 20%	0.012	0.014	17.0	12.0	13.6	14.7	5.0	7.4
MSS1583-123ME_	12 $\pm$ 20%	0.014	0.017	14.5	11.7	13.3	14.2	4.4	6.3
MSS1583-153ME_	15 $\pm$ 20%	0.018	0.021	13.5	10.1	11.5	12.4	4.3	6.1
MSS1583-183ME_	18 $\pm$ 20%	0.020	0.023	12.0	9.2	10.5	11.2	3.9	5.5
MSS1583-223ME_	22 $\pm$ 20%	0.023	0.026	10.5	8.2	9.1	10.4	3.7	5.3
MSS1583-333ME_	33 $\pm$ 20%	0.033	0.038	8.5	7.0	7.9	8.6	3.4	4.8
MSS1583-473ME_	47 $\pm$ 20%	0.048	0.055	7.3	5.9	6.7	7.3	2.7	3.7
MSS1583-683ME_	68 $\pm$ 20%	0.061	0.070	6.0	4.7	5.5	6.0	2.5	3.4
MSS1583-104KE_	100 $\pm$ 10%	0.090	0.103	4.8	3.9	4.4	4.8	2.0	2.8
MSS1583-154KE_	150 $\pm$ 10%	0.138	0.159	3.7	3.1	3.6	3.9	1.55	2.20
MSS1583-224KE_	220 $\pm$ 10%	0.205	0.235	3.0	2.6	3.0	3.3	1.30	1.80
MSS1583-334KE_	330 $\pm$ 10%	0.300	0.345	2.7	2.0	2.3	2.5	1.00	1.45
MSS1583-474KE_	470 $\pm$ 10%	0.386	0.445	2.2	1.8	2.0	2.2	0.96	1.35
MSS1583-684KE_	680 $\pm$ 10%	0.570	0.655	1.8	1.4	1.6	1.8	0.78	1.10
MSS1583-824KE_	820 $\pm$ 10%	0.640	0.736	1.6	1.3	1.5	1.6	0.74	1.0
MSS1583-105KE_	1000 $\pm$ 10%	0.860	0.990	1.5	1.1	1.3	1.4	0.63	0.86

1. Specify **termination** and **packaging** codes:

MSS1583-105KED

Termination: E = RoHS compliant matte tin over nickel over phosphorus.

Special order:

P = RoHS tin-silver-copper (95.5/4/0.5) or Q = non-RoHS tin-lead (63/37).

Packaging: D = 13" machine-ready reel. EIA-481 embossed plastic tape (300 parts per full reel).

B = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter D instead.

2. Inductance tested at 100 kHz, 0.1 Vrms, 0 Adc using an Agilent/HP 4263B LCR meter or equivalent.

3. DCR measured on a micro-ohmmeter and a Coilcraft CCF858 test fixture.

4. SRF measured using Agilent/HP 4191A or equivalent.

5. DC current at which the inductance drops the specified amount from its value without current.

6. Current that causes the specified temperature rise from 25°C ambient.

7. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.



www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com

UK +44-1236-730595 sales@coilcraft-europe.com

Taiwan +886-2-2264 3646 sales@coilcraft.com.tw

China +86-21-6218 8074 sales@coilcraft.com.cn

Singapore +65-6484 8412 sales@coilcraft.com.sg

Document 1111-1 Revised 03/26/13


© Coilcraft Inc. 2014

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.


NEW!

Shielded Power Inductors – MSS1583



Typical L vs Current

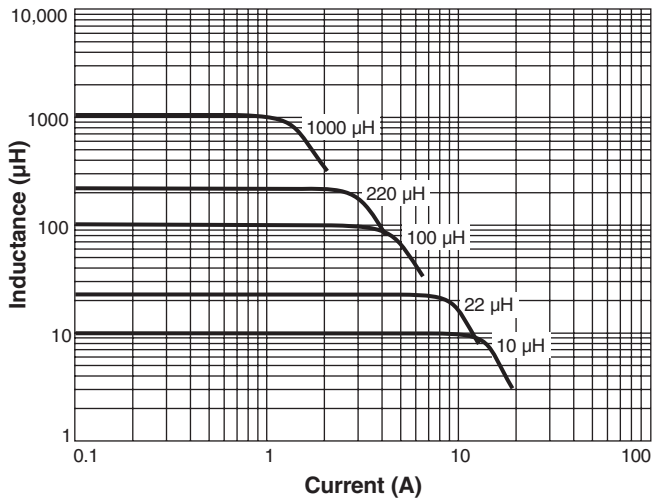

Typical L vs Frequency

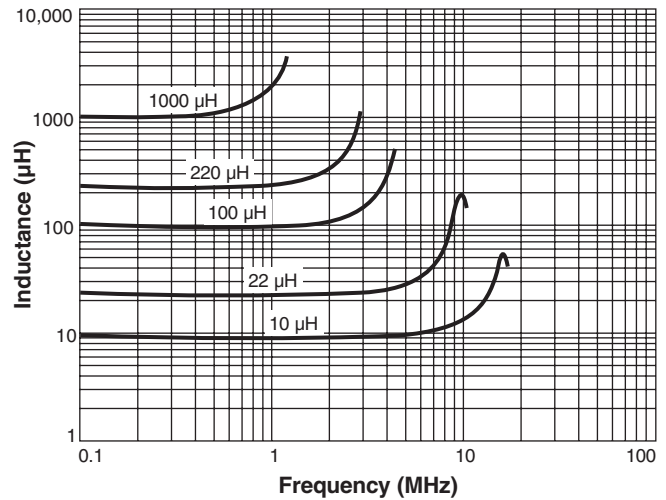

Typical Current Derating

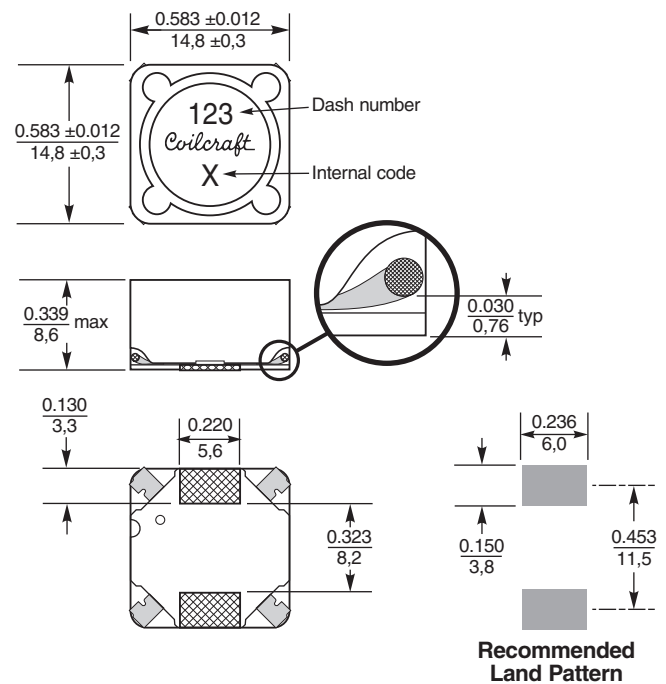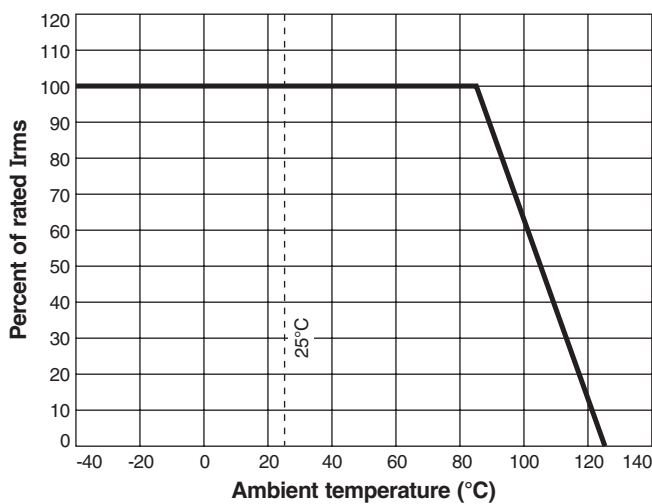

Dimensions are in $\frac{\text{inches}}{\text{mm}}$



www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 1111-2 Revised 03/26/13

© Coilcraft Inc. 2014

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.