

MCOT128128BV-YM	128 x 128	OLED Module
Specification		
Version: 1	Date: 03/10/2014	
Revision		
1	30/09/2014	First Issue

Display Features			
Resolution	128 x 128		
Appearance	Yellow on Black		
Logic Voltage	2.8V		
Interface	Multi		
Module Size	33.80 x 43.70 x 1.41mm		
Operating Temperature	-40°C ~ +70°C		
Construction	COT	Box Quantity	Weight / Display
		---	---

* - For full design functionality, please use this specification in conjunction with the SSD1327 specification. (Provided Separately)

Display Accessories	
Part Number	Description

Optional Variants	
Appearance	Voltage



SCOPE

The purpose of this specification is to define the general provisions and quality requirements that apply to the supply of display cells manufactured by Midas. This document, together with the Module Assembly Drawing, is the highest-level specification for this product. It describes the product, identifies supporting documents and contains specifications.

WARRANTY

Midas warrants that the products delivered pursuant to this specification (or order) will conform to the agreed specifications for twelve (12) months from the shipping date ("Warranty Period"). Midas is obligated to repair or replace the products which are found to be defective or inconsistent with the specifications during the Warranty Period without charge, on condition that the products are stored or used as the conditions specified in the specifications. Nevertheless, Midas is not obligated to repair or replace the products without charge if the defects or inconsistency are caused by the force majeure or the reckless behaviors of the customer.

After the Warranty Period, all repairs or replacements of the products are subject to charge.

FEATURES

- Small molecular organic light emitting diode.
- Color : Yellow
- Panel resolution : 128*128
- Driver IC : SSD1327
- Excellent Quick response time : 10μs
- Extremely thin thickness for best mechanism design : 1.41 mm
- High contrast : 10000:1
- Wide viewing angle : Free
- Strong environmental resistance.
- 8-bit 6800-series Parallel Interface, 8-bit 8080-series Parallel Interface, Serial Peripheral Interface, I²C Interface.
- Wide range of operating temperature : -40 to 80°C
- Anti-glare polarizer.



MECHANICAL DATA

NO	ITEM	SPECIFICATION	UNIT
1	Dot Matrix	128 x 128	dot
2	Dot Size	0.19 (W) x 0.19 (H)	mm ²
3	Dot Pitch	0.21 (W) x 0.21 (H)	mm ²
4	Aperture Rate	82	%
5	Active Area	26.86 (W) x 26.86 (H)	mm ²
6	Panel Size	33.8 (W) x 36.5 (H)	mm ²
7*	Panel Thickness	1.22 ± 0.1	mm
8	Module Size	33.8 (W) x 43.7 (H) x 1.41 (T)	mm ³
9	Diagonal A/A size	1.5	inch
10	Module Weight	3.48 ± 10%	gram

* Panel thickness includes substrate glass, cover glass and UV glue thickness.

MIDAS
DISPLAYS

DESIGN • MANUFACTURE • SUPPLY



MAXIMUM RATINGS

ITEM	MIN	MAX	UNIT	Condition	Remark
Supply Voltage (V_{CI})	-0.3	4	V	$T_a = 25^{\circ}\text{C}$	IC maximum rating
Supply Voltage (V_{CC})	8	19	V	$T_a = 25^{\circ}\text{C}$	IC maximum rating
Operating Temp.	-40	70	$^{\circ}\text{C}$		
Storage Temp	-40	85	$^{\circ}\text{C}$		
Humidity		85	%		
Life Time (30K)(typ)			Hrs	120 cd/m ² , 50% checkerboard	Note (1)
Life Time (40K)(typ)			Hrs	95 cd/m ² , 50% checkerboard	Note (2)
Life Time (50K)(typ)			Hrs	80 cd/m ² , 50% checkerboard	Note (3)

Note:

(A) Under $V_{CC} = 15\text{V}$, $T_a = 25^{\circ}\text{C}$, 50% RH.

(B) Life time is defined the amount of time when the luminance has decayed to less than 50% of the initial measured luminance.

(1) Setting of 120 cd/m² :

- Contrast setting : 0x74
- Frame rate : 105Hz
- Duty setting : 1/128

(2) Setting of 95 cd/m² :

- Contrast setting : 0x60
- Frame rate : 105Hz
- Duty setting : 1/128

(3) Setting of 80 cd/m² :

- Contrast setting : 0x4A
- Frame rate : 105Hz
- Duty setting : 1/128

ELECTRICAL CHARACTERISTICS

D.C ELECTRICAL CHARACTERISTICS

SYMBOL	PARAMETERS	TEST CONDITION	MIN	TYP	MAX	UNIT
V_{CC}	Driver power supply (for OLED panel)	-	14.5	15	15.5	V
V_{CI}	Low voltage power supply	-	2.6	-	3.5	V
V_{OH}	High logic output level	$I_{out}=100\text{ }\mu\text{A}$,	$0.9*V_{CI}$	-	V_{CI}	V
V_{OL}	Low logic output level	$I_{out}=100\text{ }\mu\text{A}$,	0	-	$0.1*V_{CI}$	V
V_{IH}	High logic input level	$I_{out}=100\text{ }\mu\text{A}$,	$0.8*V_{CI}$	-	V_{CI}	V
V_{IL}	Low logic input level	$I_{out}=100\text{ }\mu\text{A}$,	0	-	$0.2*V_{CI}$	V
I_{CC}	V_{CC} Supply Current	$V_{CI} = 3.5\text{V}$, $V_{CC} = 18\text{V}$, Display ON, No panel attached, contrast = FF	External $V_{DD} = 2.5\text{V}$	600	750	μA
			Internal $V_{DD} = 2.5\text{V}$	600	750	
I_{CI}	V_{CI} Supply Current	$V_{CI} = 3.5\text{V}$, $V_{CC} = 18\text{V}$, Display ON, No panel attached, contrast = FF	External $V_{DD} = 2.5\text{V}$	35	50	μA
			Internal $V_{DD} = 2.5\text{V}$	95	120	
I_{SEG}	Segment output current Setting $V_{CC}=18\text{V}$, $I_{REF}=10\text{ }\mu\text{A}$	Contrast=FF	-	300	370	μA
		Contrast=AF	-	206	-	μA
		Contrast=7F	-	150	-	μA
		Contrast=3F	-	75	-	μA
		Contrast=1F	-	37.5	-	μA

ELECTRO-OPTICAL CHARACTERISTICS

PANEL ELECTRICAL SPECIFICATIONS

PARAMETER	MIN	TYP.	MAX	UNITS	COMMENTS
Normal mode current consumption	-	15	17	mA	All pixels on
Standby mode current consumption	-	1	2	mA	Standby mode 10% pixels on
Normal mode power consumption	-	225	255	mW	All pixels on
Standby mode power consumption	-	15	30	mW	Standby mode 10% pixels on
Pixel Luminance	80	100		cd/m ²	Display Average
Standby Luminance		25		cd/m ²	
CIE _x (Yellow)	0.43	0.47	0.51		CIE1931
CIE _y (Yellow)	0.48	0.52	0.56		CIE1931
Dark Room Contrast	10000:1				
Viewing Angle		Free		degree	
Response Time		10		μs	

Normal mode condition :


- Driving Voltage : 15V
- Contrast setting : 0x60
- Frame rate : 105Hz
- Duty setting : 1/128

Standby mode condition :


- Driving Voltage : 15V
- Contrast setting : 0x00
- Frame rate : 105Hz
- Duty setting : 1/128

INTERFACE

FUNCTION BLOCK DIAGRAM

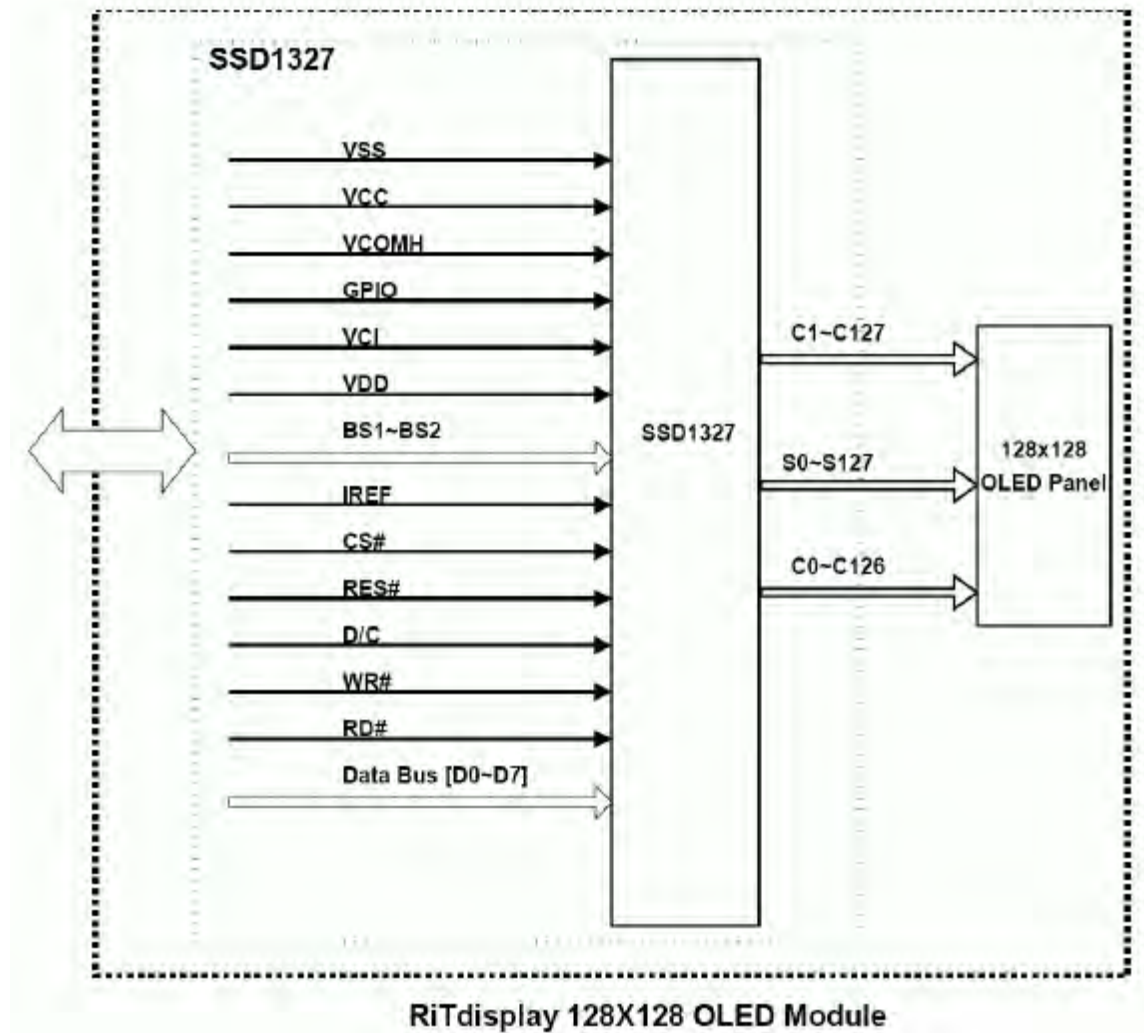

PANEL LAYOUT DIAGRAM

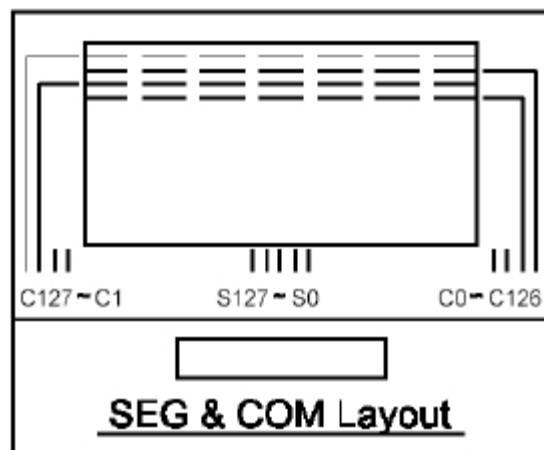

PIN ASSIGNMENTS

PIN NAME	PIN NO	DESCRIPTION
VSS	1	Ground.
VCC	2	Power supply for analog circuit.
VCOMH	3	Com Voltage Output. A capacitor should be connected between this pin and V _{SS} .
GPIO	4	General I/O port.
VCI	5	Power supply for logic circuit.
VDD	6	A capacitor should be connected between this pin and V _{SS} .
BS1	7	MCU bus interface selection pins.
BS2	8	MCU bus interface selection pins.
VSS	9	Ground.
IREF	10	Reference current input pin. A resistor should be connected between this pin and V _{SS} .
CS#	11	Chip select input.
RES#	12	Reset signal input. When it's low, initialization of SSD1327 is executed.
D/C	13	Data/ Command control. Pull high for write/read display data. Pull low for write command or read status.
WR#	14	MCU interface input. Data write operation is initiated when it's pull low.
RD#	15	MCU interface input. Data read operation is initiated when it's pull low.
D0	16	Data bus(for parallel interface)
D1	17	
D2	18	
D3	19	
D4	20	
D5	21	
D6	22	
D7	23	
VCC	24	Power supply for analog circuit.
VSS	25	Ground.

GRAPHIC DISPLAY DATA RAM ADDRESS MAP

The GDDRAM is a bit mapped static RAM holding the bit pattern to be displayed. The size of the RAM is 128x128x4 bits. For mechanical flexibility, re-mapping on both Segment and Common outputs can be selected by software. The GDDRAM address maps below tables show some examples on using the command "Set Re-map" A0h to re-map the GDDRAM. In the following tables, the lower nibble and higher nibble of D0, D1, D2 ... D8189, D8190, D8191 represent the 128x128 data bytes in the GDDRAM.

The GDDRAM map under the following condition:

Command "Set Re-map" A0h is set to:

Disable Column Address Re-map (A[0]=0)


Disable Nibble Re-map (A[1]=0)

Enable Horizontal Address Increment (A[2]=0)

Disable COM Re-map (A[4]=0)

Display Start Line=00h

Data byte sequence: D0, D1, D2 ... D8191

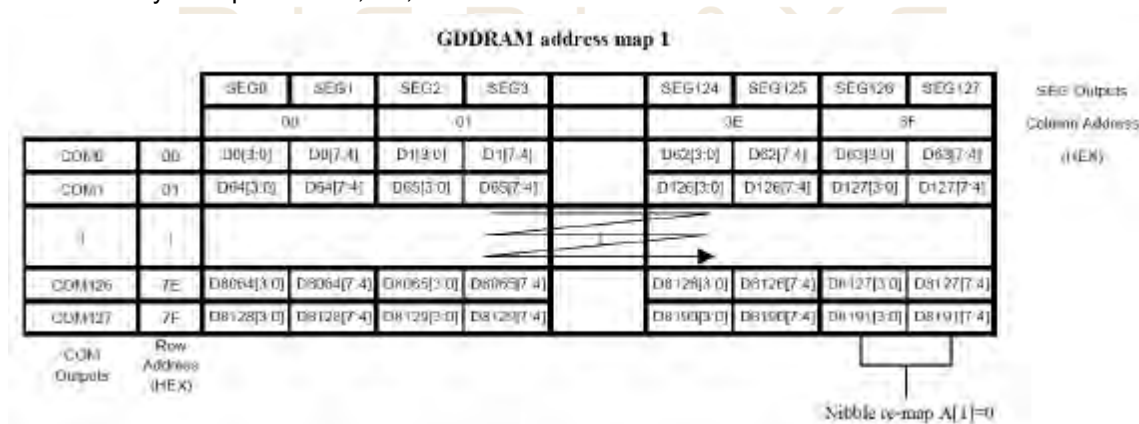

The GDDRAM map under the following condition:

Command "Set Re-map" A0h is set to:

Disable Column Address Re-map (A[0]=0)


Disable Nibble Re-map (A[1]=0)

Enable Vertical Address Increment (A[2]=1)

Disable COM Re-map (A[4]=0)

Display Start Line=00h

Data byte sequence: D0, D1, D2 ... D8191

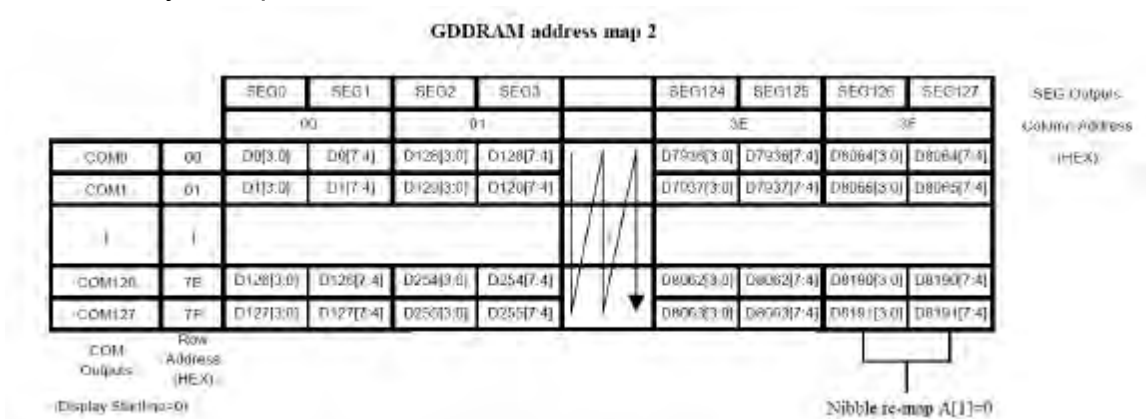

The GDDRAM map under the following condition:

Command "Set Re-map" A0h is set to:

Enable Column Address Re-map (A[0]=1)


Enable Nibble Re-map (A[1]=1)

Enable Horizontal Address Increment (A[2]=0)

Disable COM Re-map (A[4]=0)

Display Start Line=00h

Data byte sequence: D0, D1, D2 ... D8191

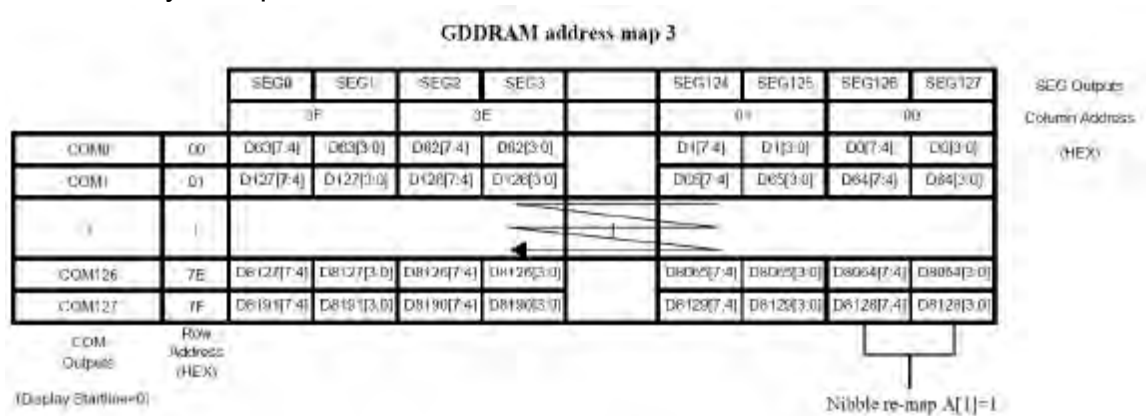

The example in which the display start line register is set to 10h with the following condition:

Command "Set Re-map" A0h is set to:

Disable Column Address Re-map (A[0]=0)


Disable Nibble Re-map (A[1]=0)

Enable Horizontal Address Increment (A[2]=0)

Enable COM Re-map (A[4]=1)

Display Start Line=78h (corresponds to COM119)

Data byte sequence: D0, D1, D2 ... D8191

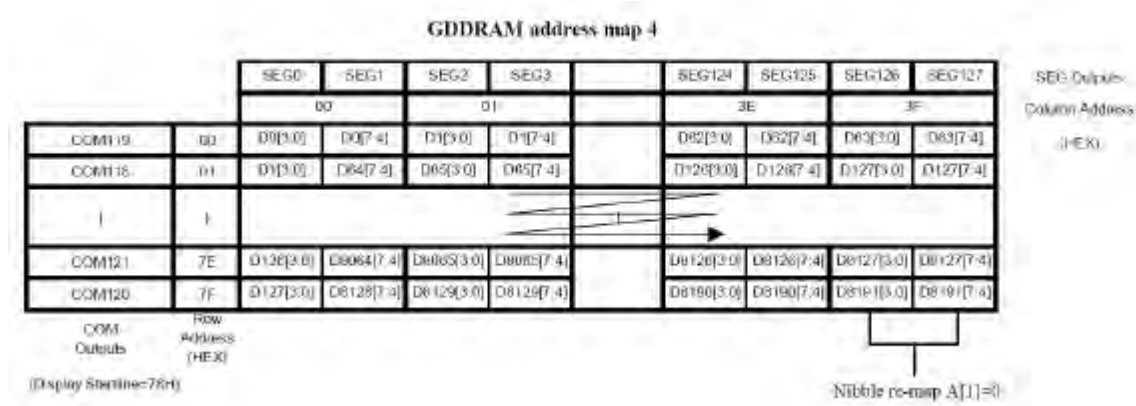

The GDDRAM map under the following condition:

Command "Set Re-map" A0h is set to:

Disable Column Address Re-map (A[0]=0)

Disable Nibble Re-map (A[1]=0)

Enable Horizontal Address Increment (A[2]=0)

Disable COM Re-map (A[4]=0)

Display Start Line=00h


Column Start Address=01h

Column End Address=3Eh

Row Start Address=01h

Row End Address=7Eh

Data byte sequence: D0, D1, D2 ... D7811

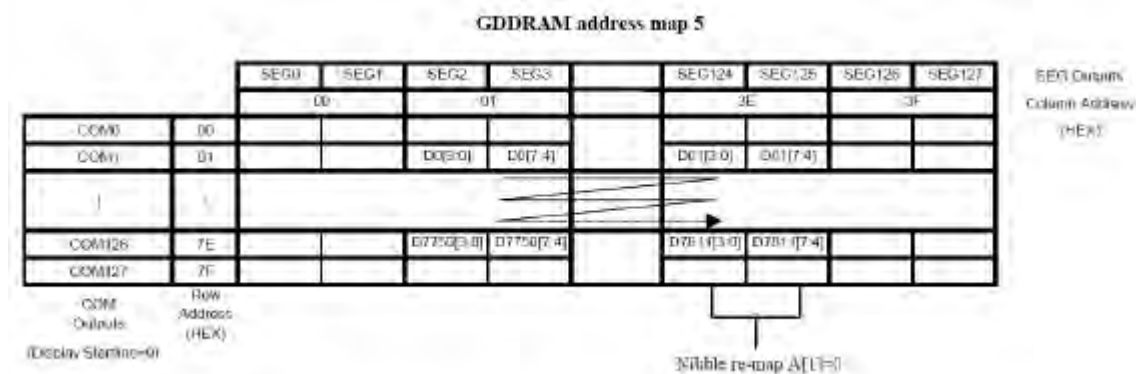


INTERFACE TIMING CHART

8080-Series MCU Parallel Interface Timing Characteristics

($V_{DD} = V_{SS} = 2.4$ to $2.6V$, $V_{CI} = 3.3V$, $T_A = 25^\circ C$)

Symbol	Parameter	Min	Typ	Max	Unit
t_{cycle}	Clock Cycle Time	300	-	-	ns
t_{AS}	Address Setup Time	10	-	-	ns
t_{AH}	Address Hold Time	0	-	-	ns
t_{DSW}	Write Data Setup Time	40	-	-	ns
t_{DHW}	Write Data Hold Time	7	-	-	ns
t_{DHR}	Read Data Hold Time	20	-	-	ns
t_{OH}	Output Disable Time	-	-	70	ns
t_{ACC}	Access Time	-	-	140	ns
$t_{PWL\bar{L}}$	Read Low Time	150	-	-	ns
$t_{PWL\bar{H}}$	Write Low Time	60	-	-	ns
$t_{PWH\bar{L}}$	Read High Time	60	-	-	ns
$t_{PWH\bar{H}}$	Write High Time	60	-	-	ns
t_R	Rise Time	-	-	15	ns
t_F	Fall Time	-	-	15	ns
t_{CS}	Chip select setup time	0	-	-	ns
t_{CSH}	Chip select hold time to read signal	0	-	-	ns
t_{CSF}	Chip select hold time	20	-	-	ns

8080-series MCU parallel interface characteristics

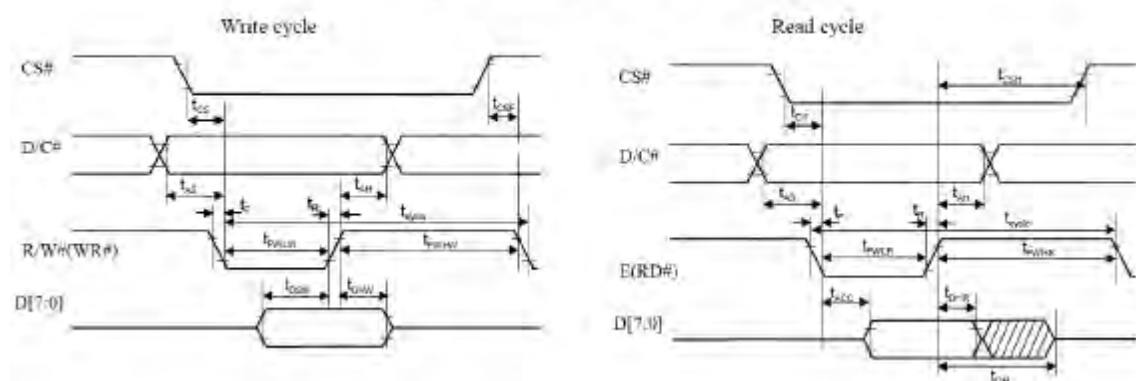


POWER ON / OFF SEQUENCE & APPLICATION CIRCUIT

POWER ON / OFF SEQUENCE


Power ON sequence:

1. Power ON V_{CI} .
2. After V_{CI} becomes stable, set wait time at least 1ms (t_0) for internal V_{DD} become stable. Then set RES# pin LOW (logic low) for at least 100us (t_1) (4) and then HIGH (logic high).
3. After set RES# pin LOW (logic low), wait for at least 100us (t_2). Then Power ON $V_{CC(1)}$.
4. After V_{CC} become stable, send command AFh for display ON. SEG/COM will be ON after 200ms(t_{AF}).

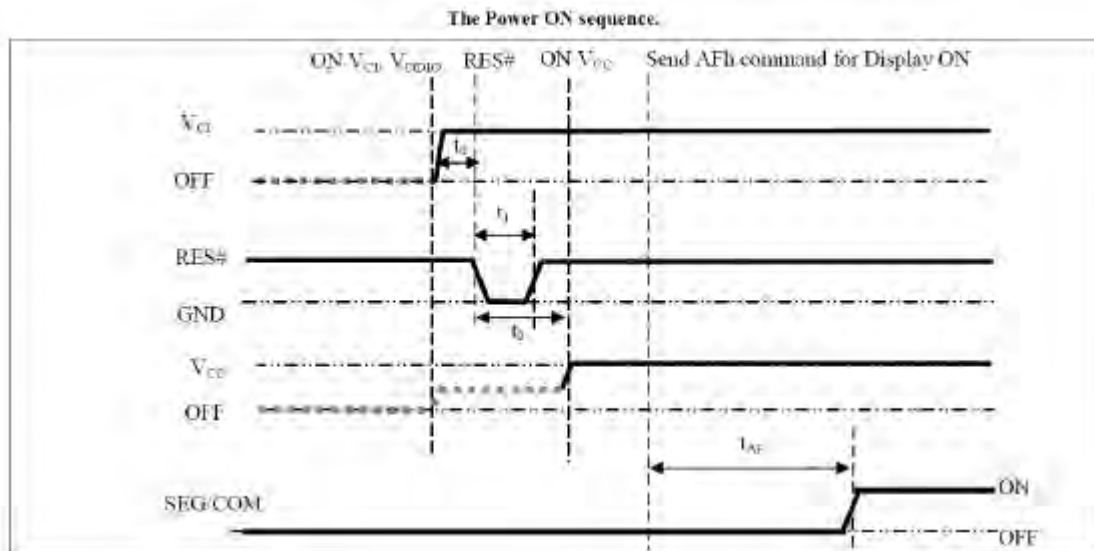

Power OFF sequence:


1. Send command AEh for display OFF.
2. Power OFF $V_{CC(1), (2), (3)}$
3. Wait for t_{OFF} . Power OFF V_{CI} (where Minimum $t_{OFF}=80ms$ (5), Typical $t_{OFF}=100ms$)

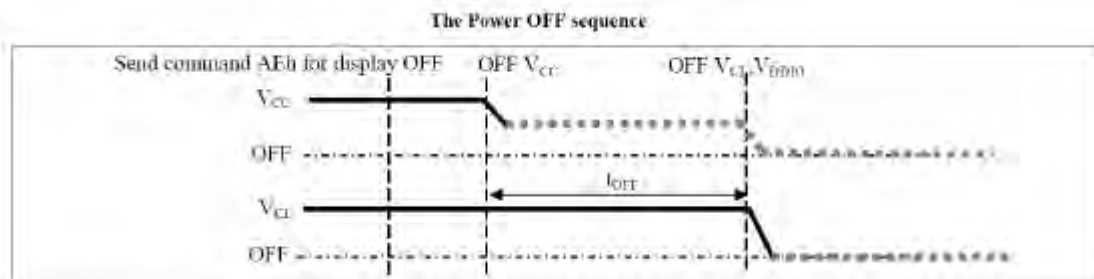

Note:

- (1) Since an ESD protection circuit is connected between V_{CI} and V_{CC} , V_{CC} becomes lower than V_{CI} whenever V_{CI} is ON and V_{CC} is OFF as shown in the dotted line of V_{CC} in above figures.
- (2) V_{CC} should be kept disable when it is OFF.
- (3) Power pins (V_{CI} , V_{CC}) can never be pulled to ground under any circumstance.
- (4) The register values are reset after t_1 .
- (5) V_{CI} should not be Power OFF before V_{CC} Power OFF

APPLICATION CIRCUIT

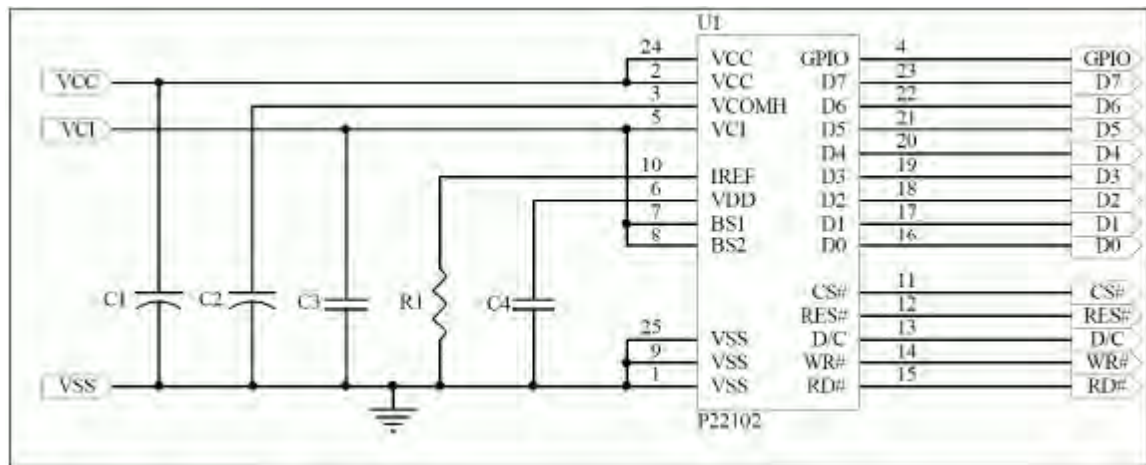

Component:

C1, C2: 4.7uF/35V(Tantalum type) or VISHAY (572D475X0025A2T)

C3, C4: 1uF/16V(0603)

R1: 1M ohm (0603) 1%

This circuit is for 8080 8bits interface.

COMMAND TABLE Refer

to IC Spec.: SSD1327

DESIGN • MANUFACTURE • SUPPLY

RELIABILITY TEST CONDITIONS




No.	Items	Specification	Quantity
1	High temp. (Non-operation)	85°C, 240hrs	5
2	High temp. (Operation)	70°C, 120hrs	5
3	Low temp. (Operation)	-40°C, 120hrs	5
4	High temp. / High humidity (Operation)	65°C, 90%RH, 120hrs	5
5	Thermal shock (Non-operation)	-40°C ~85°C (-40°C /30min; transit /3min; 85°C /30min; transit /3min) 1cycle: 66min, 100 cycles	5
6	Vibration	Frequency : 5~50HZ, 0.5G Scan rate : 1 oct/min Time : 2 hrs/axis Test axis : X, Y, Z	1 Carton
7	Drop	Height: 120cm Sequence : 1 angle 、3 edges and 6 faces Cycles: 1	1 Carton
8	ESD (Non-operation)	Air discharge model, ±8kV, 10 times	5

Test and measurement conditions

1. All measurements shall not be started until the specimens attain to temperature stability.
2. All-pixels-on is used as operation test pattern.
3. The degradation of Polarizer are ignored for item 1, 4 & 5.

Evaluation criteria


1. The function test is OK.
2. No observable defects.
3. Luminance: > 50% of initial value.
4. Current consumption: within $\pm 50\%$ of initial value.

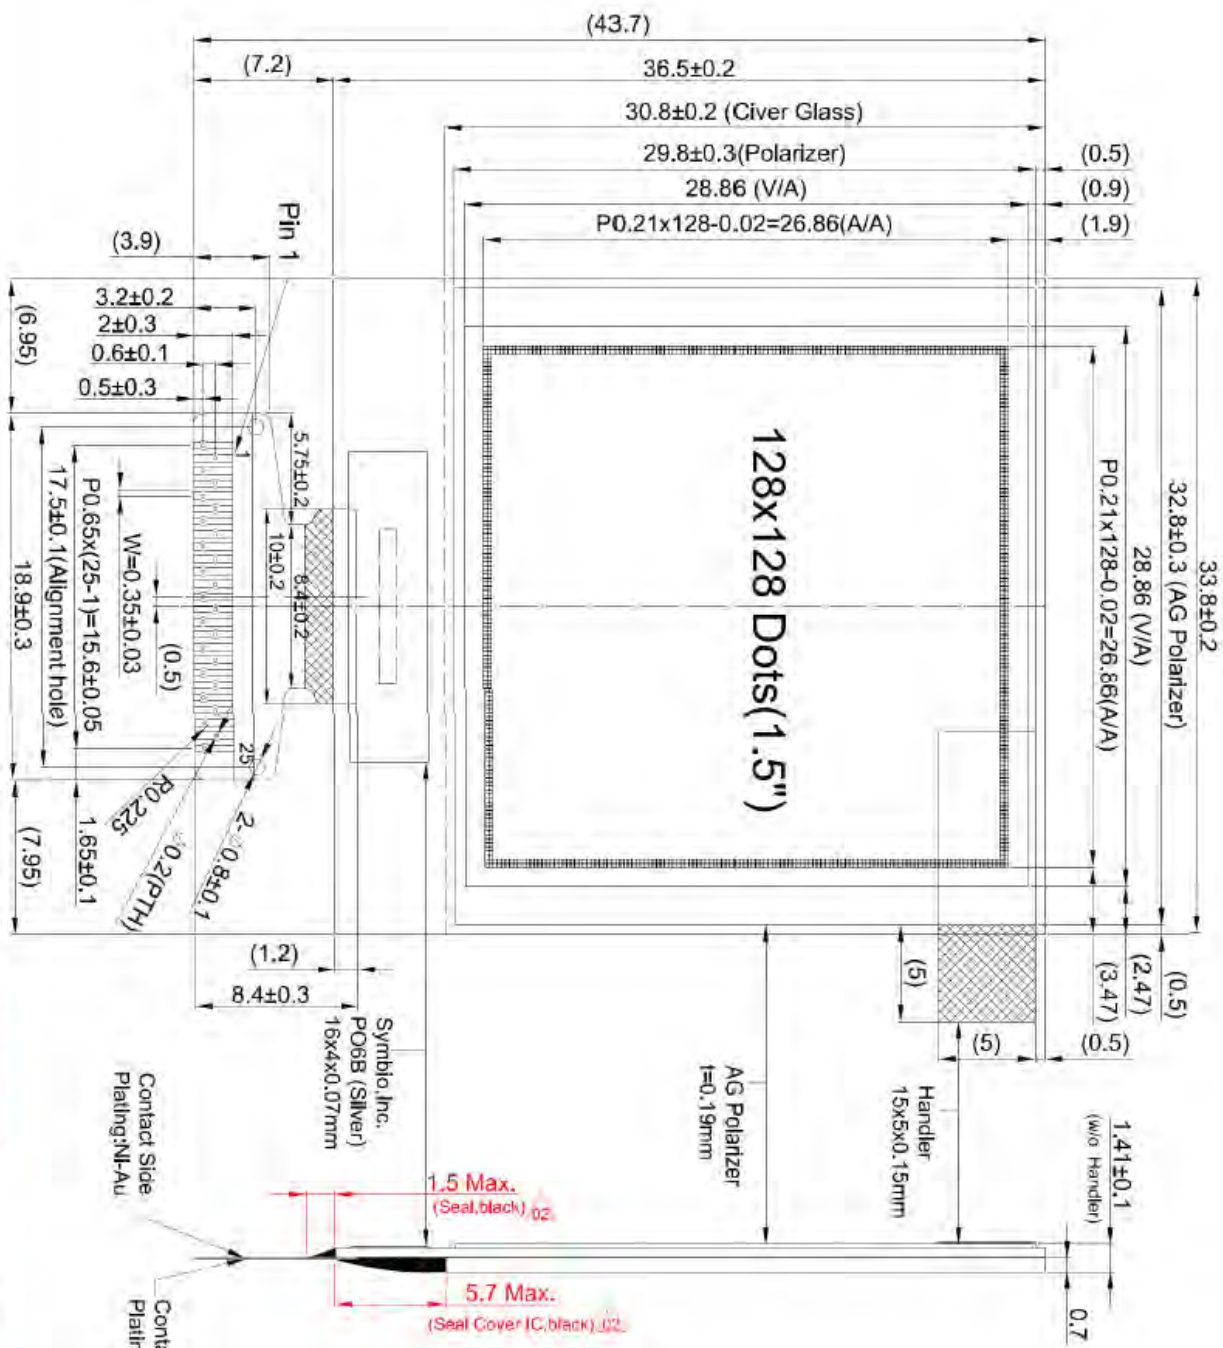

- Specification**
- 1. Display: OLED(White)
 - 2. Dot Matrix: 128x128
 - 3. Dot Size: 0.19x0.19mm
 - 4. Dot Pitch: 0.21x0.21mm
 - 5. Aperture Rate: 82%
 - 6. Active Area: 26.86x26.86mm
 - 7. IC: SSD1327Z

General Tolerance		CONFIDENTIAL		Scale	Unit	Sheet	PROJECT CODE	
Length (mm)	Tolerance(mm)		THAI Mark Inspection	2.5:1	mm	1/1	PART NAME	REVISION
0 ~ 8	±0.1	M.E.	E.E.	Module	Spec.	Approved	PARTS NO.	REVISION
8 ~ 25	±0.2							
25 ~ 50	±0.3							

FOOTPRINT DRAWING

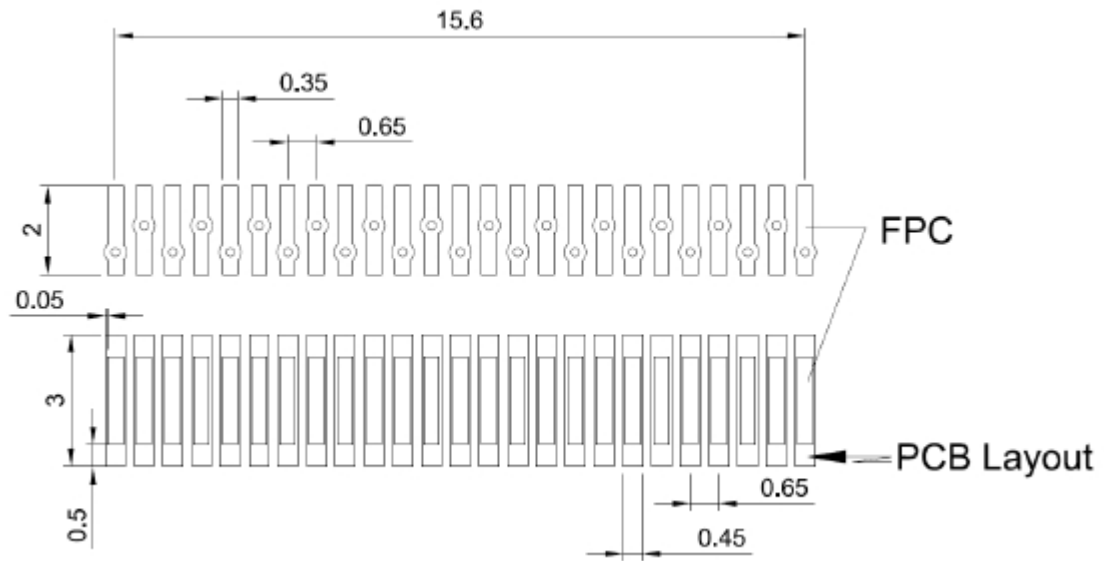

MIDAS
DISPLAYS

DESIGN • MANUFACTURE • SUPPLY

