


This drawing may not be used, reproduced or made available in any form without written or prior written approval.

The supplier acknowledges that, with the acceptance of this drawing, he is a participant in manufacturing the illustrated part in accordance with the drawing's requirements and is responsible for the quality of the part. The supplier is not responsible for any damage or loss of data resulting from the use of the drawing. The supplier is not responsible for any damage or loss of data resulting from the use of the drawing. The supplier is not responsible for any damage or loss of data resulting from the use of the drawing.

Technische Daten/ technical data	:	Akkupack/ batterypack
Chemie/ chemistry	:	Lithium Ion
Zellenzahl/ no. of cells	:	2 Zellen/ cells INR18650 LGC B4 ; 1S2P
Kapazität/ capacity	:	nom. 5200mAh discharge at 0.2C min. 5000mAh discharge at 0.2C
		ta:20°C; EV(Discharge End Voltage): 2.75V per cell
Innenwiderstand/ impedance	:	< 80m0hm (battery and safetyboard)
Nominalspannung/ nominal voltage	:	3.7V
Standard Ladespannung/ standard charge voltage	:	4.2V±1%
Standard Entladespannung/ standard discharge voltage	:	2.75V
Nominaler Ladestrom/ nominal charge current	:	0.5C
Maximaler Ladestrom/ maximum charge current	:	3000mA (limited by safetyboard)
Ladeendstrom/ charge end current	:	0.01C recommended
Maximaler Entladestrom/ maximum discharge current	:	3000mA (limited by safetyboard)
Anwendungstemperaturbereich/ ambient temperature range	:	0°C...+45°C charge -20°C...+60°C discharge -20°C...+30°C storage max. 1 year -20°C...+45°C storage max. 3months
Selbstentladung/ self discharge	:	≤ 5% / month at20°C ≤ 10% / month at30°C ≤ 20% / month at40°C
Standards/ 	:	UN 3480, Subsection 38.3 All cells and batterypacks type tested according to UN manual of test and criteria subsection 38.3

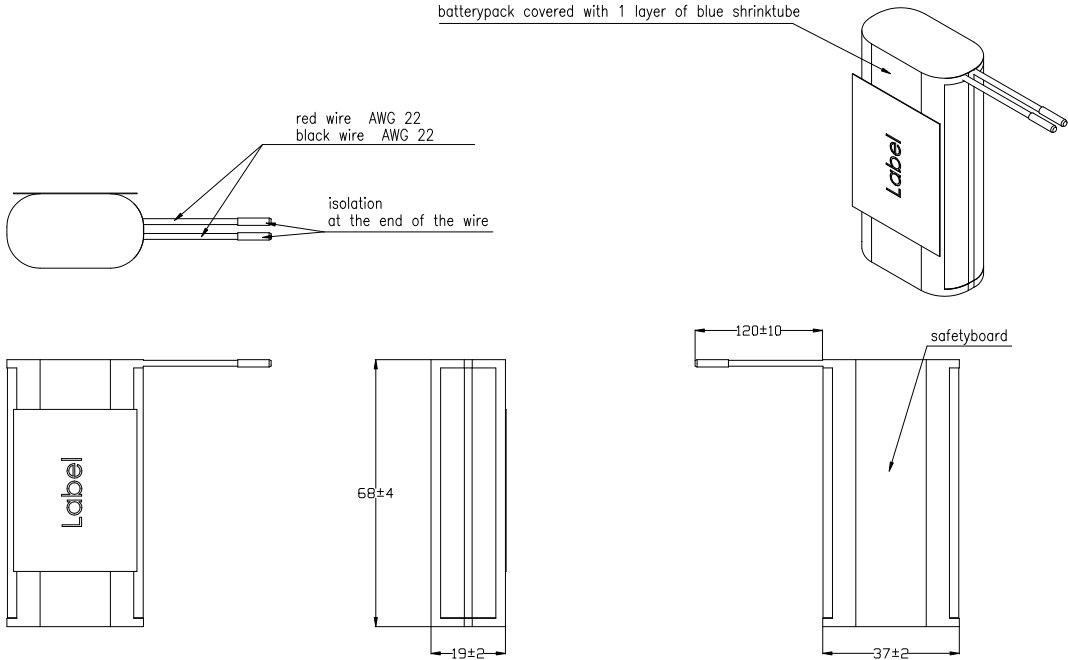

Technische Daten/ technical data	:	Sicherheitsschaltung/ safety board
Überladeschutzspannung/ over charge voltage detection	:	4.25V±25mV per cell
Wiedereinschaltspannung/ over charge release voltage	:	4.05V±50mV per cell
Entladeabschaltspannung/ over discharge detection voltage	:	2.5V±62mV per cell
Wiedereinschaltspannung/ over discharge release voltage	:	2.85V±250mV per cell
Nominaler Lade/Entladestrom/ nominal operating current	:	3A
Entlade Abschaltstrom/ discharge cut off current	:	8.5A± 2A
Kurzschlusschutz/ short circuit protection	:	gegen äußeren Kurzschluss/ against external short circuit
Temperaturumschalter/ temperature switch	:	---
MOSFET	:	in Masse in Gnd
Rückstellkriterium/ release condition	:	Last trennen, Aktiv nach Anladen/ cut load, release after charging up
Nettogewicht/ net weight	:	ca./ approx. 100g
Leiterplattenmaterial/ pcb material	:	FR4
Standards	:	CE

Verwendungsbereich/Application range für Anfrage/for inquiry AN-IS-2013-00425				Zul. Abweichung/ Allowable deviation	Oberfläche/ Surface	Maßstab/Scale (DIN A2): 1:1	Gewicht/Weight
				Allgemeintoleranz DIN ISO 2768-m		Werkstoff/Work material, Modell-Nr.	
				2013 Zeichn./ Drawn by	Datum/Date 23.10.	Name JE	Zeichnungsname/Drawing name Li-Ion Battery 3.7V 5200mAh with safetyboard
						Zeichnungsnummer/Drawing number Artikelnummer/Part number 2447-3033-01	Blatt/ Sheet 1
V2	changed cell description		18.12.17	DS			
V1	change request: DE-15-0022		15.01.16	MSI			
Version		Änderung/Change		Datum/Date		Ursprung/Origin Proj. IS-2013-00425	
						Ersatz für/Replaced by	Ersatz durch/Replaced through